

Avaya

Exam Questions 75940X

Avaya Converged Platform Integration Exam



NEW QUESTION 1

When powering up the virtual machines, what is the first virtual machine that needs to be powered on?

- A. vCenter Server
- B. WebLM
- C. System Manager
- D. Communication Manager

Answer: A

NEW QUESTION 2

The Storage dashlet contains a view of the status of the Host and Services related to the Storage. By default, in which two places can this dashlet be viewed in Avaya Orchestrator? (Choose two.)

- A. The Service Status View
- B. The Home Dashboard
- C. The Host Status View
- D. The Storage Dashboard
- E. The Rack View

Answer: AB

NEW QUESTION 3


Using VMware networking in ACP 4200, how are Virtual NICs mapped to physical NICs?

- A. Via DRS rules
- B. On a 1-to-1 basis
- C. Via Virtual Switches and Port Groups
- D. Via the VNIIC mapping tables

Answer: D

NEW QUESTION 4

Refer to the exhibit.

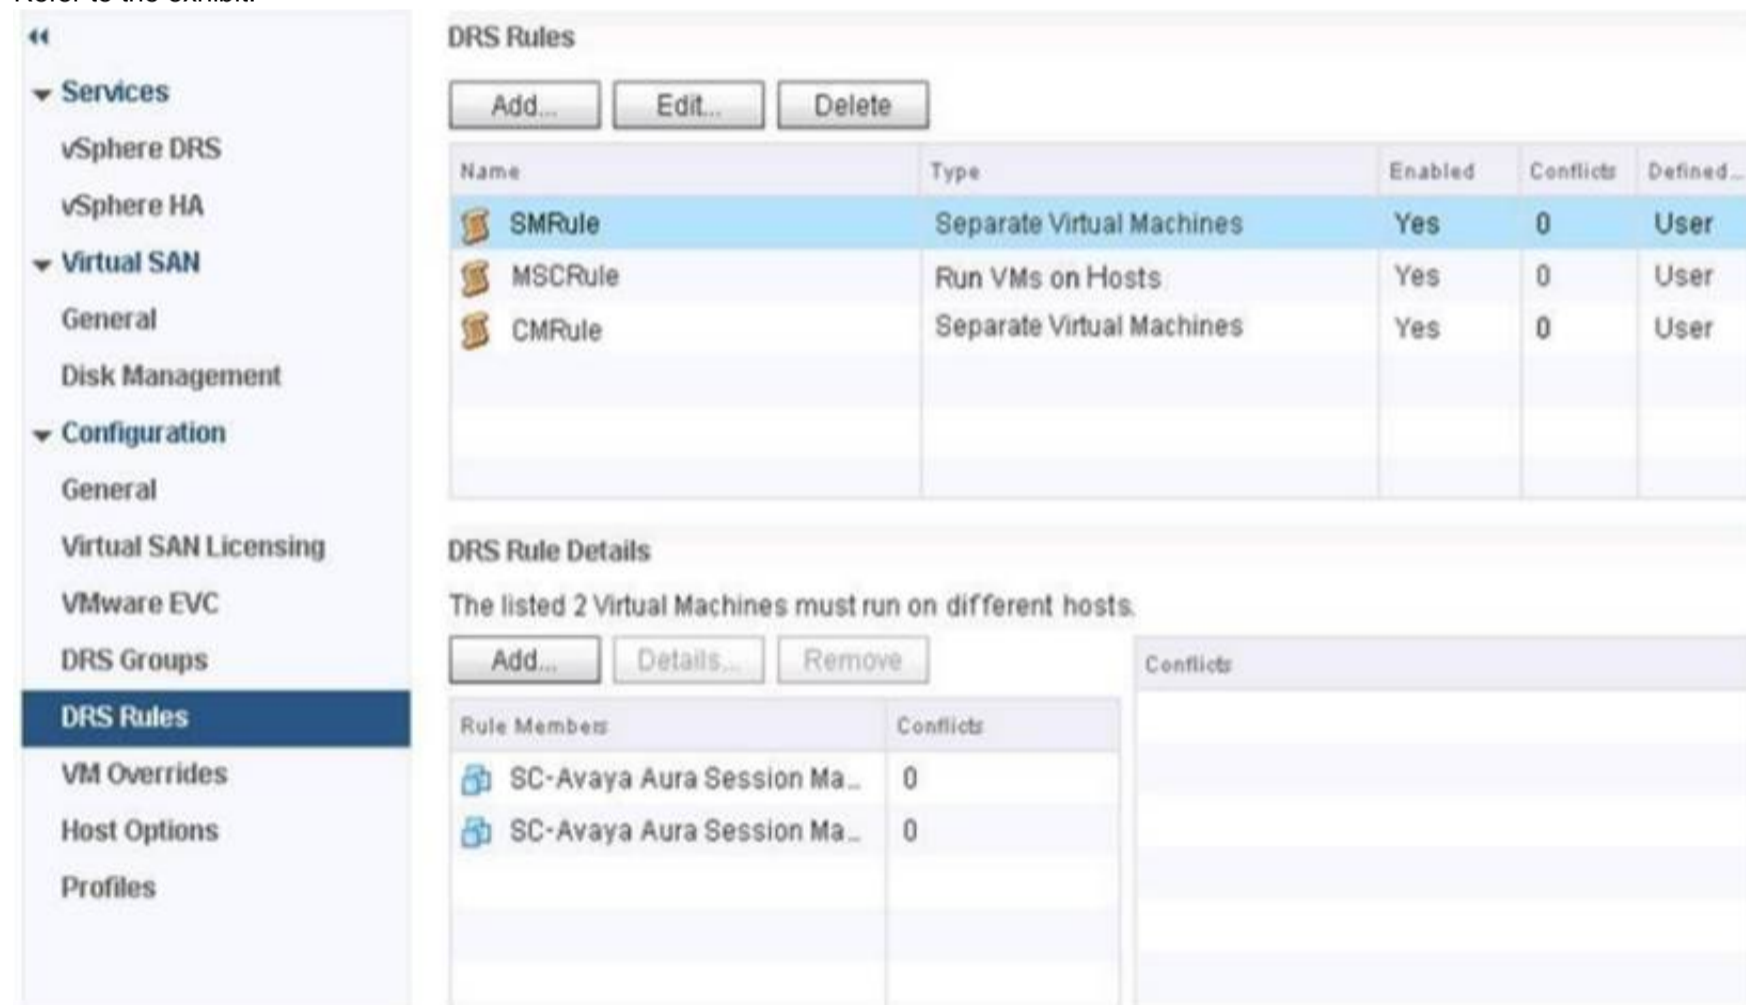

DRS Rules

Name	Type	Enabled	Conflicts	Defined...
SMRule	Separate Virtual Machines	Yes	0	User
MSCRule	Run VMs on Hosts	Yes	0	User
CMRule	Separate Virtual Machines	Yes	0	User

DRS Rule Details

The listed 2 Virtual Machines must run on different hosts.

Rule Members	Conflicts
SC-Avaya Aura Session Ma...	0
SC-Avaya Aura Session Ma...	0

Conflicts

What is the purpose of the “SMRule” DRS rule that states the two Avaya Aura® Session Managers must run off different ESXi hosts?

- A. To improve the latency of DRS load-balancing
- B. To prevent a single ESXi host from being overloaded with SIP traffic
- C. To preserve seamless failover/recovery across primary and secondary Session Managers
- D. To reduce the memory and CPU load on a single ESXi host

Answer: C

NEW QUESTION 5

What is the purpose of VMware vMotion as used in ACP 4200?

- A. It enables an operational virtual machine to migrate from one ESXi host to another, which includes its running state and storage.

- B. It dynamically allocated and balances computing capacity across the logical resource pools.
- C. It provides monitoring of operating system and hardware failures, and also restarts virtual machines on other hosts within the resource pool.
- D. It creates a pool of virtual disk space that can be shared by multiple virtual machines.

Answer: A

NEW QUESTION 6

An engineering implementation team has been asked to install an ACP 4200.

Which task related to the Avaya Orchestrator is completed during the installation by the implementation team?

- A. Deploy the Rack and Device Dashboards.
- B. Install Avaya Orchestrator.
- C. Run the ACP Configuration Wizard.
- D. Power on the Avaya Orchestrator virtual machine.

Answer: B

NEW QUESTION 7

An ACP 4200 engineering team is considering deploying an Extension Rack. What is the purpose of the Extension Rack?

- A. When the Main rack is not functioning properly the Extension Rack will take over for the main.
- B. When all hardware components cannot fit into the Main ACP Rack, Extension Racks are used for additional physical appliances and servers.
- C. When full redundancy is needed, Extension Racks are used for additional physical appliances and servers.
- D. When the number of telephone extensions on the Avaya Aura® applications exceed the recommended limit, Extension Racks are used to host additional media resources to support a higher limit.

Answer: C

NEW QUESTION 8

Which two are valid levels of VMware performance monitoring? (Choose two.)

- A. Visualization Performance and Fault Manager (VPFM)
- B. Virtual Machine (VM)
- C. Data Center (DC)
- D. Host

Answer: BD

NEW QUESTION 9

Which three tasks must be performed by the ACP 4200 implementation team at the customer site? (Choose three.)

- A. Connect the network switches to the customer network.
- B. Assign IP addresses to the existing Virtual Machines.
- C. Connect to the VMware vCenter Server Appliance and power up the virtual machines.
- D. Fill up the IP template.
- E. Install a ground connection for each enclosure.

Answer: ADE

NEW QUESTION 10

Which application can a technician use to remotely connect to the Management Server Console on an ACP 4200?

- A. VNC
- B. Remote Desktop Connection
- C. PuTTY
- D. Team Viewer

Answer: B

NEW QUESTION 10

A customer experienced an outage of one of their Host servers in their ACP 4200 solution. Additionally, after the failure, all of the applications that were running on the failed host, did not recover to another host.

To verify the configuration, which third party management tool needs to be used?

- A. SSH into the switches
- B. Avaya Orchestrator
- C. Nimble Storage web interface
- D. vSphere Web Client

Answer: D

NEW QUESTION 14

After implementing a new ACP 4200 solution, warnings about high temperatures on one of the host servers are reported by the Avaya Orchestrator.

To verify the temperature, fan speeds, and general hardware health of the HP Servers in the ACP 4200, which third party management tool can be used?

- A. Nimble storage web interface
- B. ESXi server client
- C. HP iLO web interface
- D. vSphere Web Client

Answer: C

NEW QUESTION 18

Refer to the exhibit.



Which Avaya Session Border Controller for Enterprise (ASBCE) configuration option is shown?

- A. High Availability
- B. Hybrid
- C. Geographic Redundancy
- D. Two-wire

Answer: A

NEW QUESTION 23

In which two situations does the Customer and Network Lifecycle workbook need to be updated? (Choose two.)

- A. On the 31st of January every year, even if no changes have been made to the ACP 4200.
- B. When an ACP 4200 component password is changed.
- C. When a new Administrator is given access to the ACP 4200.
- D. When a new host server is added to the ACP 4200.

Answer: BD

NEW QUESTION 25

Refer to the exhibit.

	A	B	C	D	E	F	G	H	I
	Build Code	Assembled Units	From Device RMU/Port	Connects to Unit	To Switch RMU/Port				
2									
1452	2D E3/S/G/GS	Gateway - 1	E5	VSP4K1	P1	1 - P1	G4501 - E5	10	Gray
1454	2D E3/S/G/GS	VSP 4800 - 2	P3	VSP4K1	P3	1 - P3	4k2 - P3	10	Gray
1455	2D E3/S/G/GS	VSP 4800 - 2	P4	VSP4K1	P4	1 - P4	4k2 - P4	10	Gray
1456	2D E3/S/G/GS	VSP 4800 - 2	P5	VSP4K1	P5	1 - P5	4k2 - P5	10	Gray
1457	2D E3/S/G/GS	VSP 4800 - 2	P6	VSP4K1	P6	1 - P6	4k2 - P6	10	Gray
1458	2D E3/S/G/GS	VSP 4800 - 2	P7	VSP4K1	P7	1 - P7	4k2 - P7	10	Gray
1459	2D E3/S/G/GS	VSP 4800 - 2	P8	VSP4K1	P8	1 - P8	4k2 - P8	10	Gray
1460	2D E3/S/G/GS	VSP 4800 - 2	P6	VSP4K1	P9	1 - P9	4k2 - P9	10	Gray
1461	2D E3/S/G/GS	VSP 4800 - 2	P10	VSP4K1	P10	1 - P10	4k2 - P10	10	Gray
1462	2D E3/S/G/GS	Server ACR - 1	N2	VSP4K1	P18	1 - P18	SVR01 - N2	15	Gray
1463	2D E3/S/G/GS	Server ACR - 2	N2	VSP4K1	P19	1 - P19	SVR02 - N2	15	Gray
1469	2D E3/S/G/GS	Server ACR - 1	N0	VSP4K1	P26	1 - P26	SVR01 - N0	15	Black
1470	2D E3/S/G/GS	Server ACR - 2	N0	VSP4K1	P27	1 - P27	SVR02 - N0	15	Black
1476	2D E3/S/G/GS	Server ACR - 1	IMM	VSP4K1	P35	1 - P35	SVR01 - IMM	15	Black
1482	2D E3/S/G/GS	EMC Storage	SPA LAN	VSP4K1	P43	1 - P43	VNX - SPA LAN	15	Black
1485	2D E3/S/G/GS	EMC Storage	SPA P0	VSP4K1	P50	1 - P50	VNX - SPA P0	5M	Aqua
1486	2D E3/S/G/GS	Gateway - 1	E6	VSP4K2	P1	2 - P1	G4501 - E6	10	Gray
1488	2D E3/S/G/GS	VSP 4800 - 1	P3	VSP4K2	P3	2 - P3	4k1 - P3	10	Gray
1489	2D E3/S/G/GS	VSP 4800 - 1	P4	VSP4K2	P4	2 - P4	4k1 - P4	10	Gray
<div> ◀ ▶ ... Switch Wiring Power Cord Wiring Serial Numbers Software Versions Licenses Calc Customer Questionnaire Network Data </div>									

An Administrator notices that a Service Status Warning is being received by Avaya Orchestrator indicating that port 27 on VSP 4850-1 is down. Based on the contents of the Customer and Network Lifecycle Workbook in the exhibit, which equipment is connected to this port?

- A. VSP4K1, port 27
- B. Server/ACR-2, Interface NO
- C. Server/ACR-1, Interface NO
- D. VSP4K1, Port 26

Answer: A

NEW QUESTION 27

How would an administrator display the IP addresses of the VSP switches of the ACP 4200 within the Avaya Orchestrator Home Dashboard?

- A. By right-clicking on the Dashboard menu item and downloading the network summary report.
- B. By right-clicking on the Admin menu item and downloading the network summary report.
- C. By right-clicking on the Report menu item and downloading the network summary report.
- D. By hovering the mouse pointer over the Up status indicator within the Network dashlet.

Answer: B

NEW QUESTION 28

Which three are found in the E:\ ACP_SW_4.0 folder of the Management Server Console (MSC)? (Choose three.)

- A. Firmware for Extreme Networks VSP Switches
- B. Software and Patches for Avaya Orchestrator and Avaya Aura® applications
- C. Installation files for the vCenter client application
- D. Software and Patches for VMware ESXi and vCenter
- E. A copy of the Lifecycle workbook

Answer: ABD

NEW QUESTION 30

The customer's networking team is considering connectivity options to the ACP 4200.

For which customers would an ACP 4200 Layer 2-only networking topology be deployed, and why?

- A. Customers who have a Layer 2 Data Center
- B. The ACP will provide Layer 3 routing for the customer.
- C. Customers who wish to retain existing VLANs, subnets, and IP subnet
- D. The ACP will extend VLANs out to the Data Center routers which will provide Layer 3 routing.
- E. Customers who do not use Dynamic routing protocol
- F. The ACP will use static routes for connectivity to the Data Center.
- G. Customers who wish to upgrade their Data Center to Fabric Connect
- H. The ACP will use Fabric Extend to integrate with the customer's Data Center switches.

Answer: D

NEW QUESTION 35

When used for an ACP 4200, which two features of the 48 inch Avaya branded enclosures are different from the 42 inch models? (Choose two.)

- A. More space for PDUs (up to 15000 Watts)
- B. More space for additional servers
- C. Higher operating temperature (up to 45 degrees Celsius)
- D. More space for fans and better cooling capacity (51,200 BTU)
- E. Use of vertical PDUs instead of horizontal

Answer: AC

NEW QUESTION 36

Refer to the exhibit.



AVAYA Orchestrator Home Dashboards Reports ACP Configuration Wizard Help Admin

Configuration Wizard: Avaya Converged Platform configuration - Step 2

ACP "AL_ACP", rack "AL_ACP_RACK"

< Back Next >

Detect Hardware Undo Import Export

Slot	Device Description	Serial No	IP Address	Protocols
Orientation: Vertical				
V1			IP Address	SNMP v2 Port Community string
V2			IP Address	SNMP v2 Port Community string
V3			IP Address	SNMP v2 Port Community string
V4			IP Address	SNMP v2 Port Community string
V5			IP Address	SNMP v2 Port Community string

An administrator is trying to add a new VSP to the ACP 4200 rack. However, when the Configuration Wizard is run and the 'Detect Hardware' button is clicked, the VSP cannot be detected.

What is potentially causing this to happen?

- A. The VSP has not been configured with the correct slot in Configuration Wizard.
- B. The VSP has not been configured with the correct Device Description in Configuration Wizard.
- C. The VSP has not been configured with the correct Protocol in Configuration Wizard.
- D. The VSP's device credentials has not been configured correctly in System Manager.

Answer: D

NEW QUESTION 40

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questons and Answers in PDF Format

75940X Practice Exam Features:

- * 75940X Questions and Answers Updated Frequently
- * 75940X Practice Questions Verified by Expert Senior Certified Staff
- * 75940X Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 75940X Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 75940X Practice Test Here](#)