

3V0-21.23 Dumps

VMware vSphere 8.x Advanced Design

<https://www.certleader.com/3V0-21.23-dumps.html>



NEW QUESTION 1

Which requirement would be classified as a functional requirement within the design documentation?

- A. The system must perform virtual machine backups through an API.
- B. Virtual machines must be patched within one month of the patch release date.
- C. Virtual machines must be restarted within 30 minutes of a host failure.
- D. The system must be able to scale to support 500 concurrent virtual machines.

Answer: C

NEW QUESTION 2

The Chief Information Security Officer (CISO) for an organization is concerned about the security posture of the operating system images that are used for the provisioning of their Software-as-a-Service (SaaS) applications. The organization is in a growth period. The organization is opening a new data center to launch its next phase of new SaaS-based solutions.

The DevOps team currently creates encrypted virtual machine (VM) templates that are used for various operating systems and adds these to the vSphere inventory. The DevOps team already uses a published content library and has been granted a role with the ability to add and delete library items.

The following requirements have been noted:

- > Impacts to the DevOps team's operational processes must be kept to a minimum.
- > The DevOps team must be able to regularly check out a copy of the image for updates and check in a new version of the image.
- > Images must be synchronized from the primary data center to the new data center.

Which three recommendations should the architect make to design a content library solution that will meet these requirements? (Choose three.)

- A. Clone virtual machines as VM templates to the published content library
- B. Create a subscribed library from the published library and synchronize Open Virtualization Format (OVF) templates on-demand
- C. Create a subscription and publish VM templates to a subscribed content library
- D. Create a subscribed library from the published library and synchronize Open Virtualization Format (OVF) templates automatically
- E. Clone virtual machines as Open Virtualization Format (OVF) templates to the published content library
- F. Update the role for the DevOps team with new privileges

Answer: BEF

NEW QUESTION 3

An architect is reviewing a physical storage design. The customer has specified that storage DRS will be used for ease of operational management for capacity and performance.

Which recommendation should the architect include in the design?

- A. Create smaller datastores to balance space with Storage DRS
- B. Use a larger number of storage profiles (varied disk speeds and RAID levels) to improve performance
- C. Create larger datastores to balance space with Storage DRS
- D. Create more datastores within each Storage DRS cluster to balance space and performance

Answer: D

NEW QUESTION 4

An architect is designing a VMware solution for a customer based on the following information:

- > The solution must support the ability to migrate workloads between hosts within a cluster.
- > The solution must support resource management priorities.
- > The solution must support the ability to connect virtual machines directly to LUNs.
- > The solution should use existing IPv4 based network infrastructure.
- > There is no budget for additional physical hardware.

Which two design decisions could the architect make to meet these requirements? (Choose two.)

- A. The ESXi hosts will leverage Fibre Channel (FC)
- B. The ESXi hosts will leverage NFS 3
- C. The ESXi hosts will leverage Fibre Channel over Ethernet (FCoE)
- D. The ESXi hosts will leverage iSCSI
- E. The ESXi hosts will leverage NFS 4.1

Answer: BD

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.storage.doc/GUID-8A929FE4-1207-4C> Starting from vSphere 7.0, VMware no longer supports software FCoE in production environments.

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.storage.doc/GUID-6B49866F-7005-40>

NEW QUESTION 5

An architect will be taking over control of a former Linux server fleet and repurposing the hardware into a new vSphere cluster. The current environment is already connected to the network but the hosts do not have any local disks. Since the fleet hardware is uniform, the architect can use a single ESXi image. All hosts within the cluster have the same CPU and memory capacity.

Which ESXi deployment method should the architect use?

- A. Stateless cached vSphere Auto Deploy
- B. Stateless vSphere Auto Deploy
- C. Manual install of each ESXi host with an image from USB
- D. Stateful vSphere Auto Deploy

Answer: B

NEW QUESTION 6

An architect is designing a new greenfield environment that will install ESXi on local disks. There is a requirement to streamline initial and future installations of ESXi hosts.

Which configuration option should the architect recommend for installing ESXi hosts to meet these requirements?

- A. Installation with kick start script
- B. Auto Deploy with stateless caching mode
- C. Manual installation using boot from SAN
- D. Auto Deploy with stateful install mode

Answer: D

NEW QUESTION 7

An architect is designing a new vSphere platform to meet a list of requirements from the security team. Which two requirements would be classified as non-functional requirements? (Choose two.)

- A. Migration of virtual machines between hosts must be encrypted
- B. Log information must be verbose to support incident resolution
- C. Critical events generated within the platform must be logged to an external Syslog service
- D. Data integrity must be ensured
- E. A common content library must be maintained across all data centers

Answer: CD

NEW QUESTION 8

Refer to the exhibit.

During a requirements gathering workshop, the architect shares the following diagram:



What should the architect recommend for guaranteed throughput for each service?

- A. Use explicit failover order with pNIC0 as Active for ESXi Management and VM Network Use explicit failover order with pNIC1 as Active for backup network Use explicit failover order with pNIC2 as Active for vMotion Use explicit failover order with pNIC3 as Active for replication
- B. Use the Route Based on IP Hash for ESXi management and VM network Use the Route Based on IP Hash for backup network Use the Route Based on the Originating Virtual Port for vMotion Use failover with pNIC3 as Active for replication
- C. Create a link aggregation group (LAG) for vDS_01 Use the Route Based on Physical NIC Load for vMotion Use the Route Based on Physical NIC Load for replication
- D. Use the Route Based on IP Hash for ESXi management and VM network Use failover with pNIC1 as Active for backup network Create a link aggregation group (LAG) for vDS_02

Answer: A

NEW QUESTION 9

Following a company merger, there are two data centers running vSphere environments. Both data centers are leveraging separate Layer 3 vMotion networks. Which requirement must be met in order to enable vMotion migration between these locations?

- A. The vMotion service must be configured on the Management VMkernel adapter
- B. A dedicated TCP/IP stack for vMotion with a dedicated gateway must be configured
- C. A stretched vMotion network must be configured between data centers
- D. Virtual machines must be powered off in order to migrate them between data centers

Answer: B

NEW QUESTION 10

During a requirements gathering workshop, the customer provides the following requirement:

➤ A new vSphere platform must be designed securely and all interfaces must be protected against potential snooping. How should this non-functional security requirement be documented?

- A. Interfaces must be audited.
- B. Encrypted channels must be used for all communications.
- C. Unauthorized access to interfaces must be reported within 15 minutes.
- D. Communications must be through Private VLANs (PVLAN).

Answer: A

NEW QUESTION 10

An architect is designing a new backup solution for a vSphere platform that has been recently upgraded to vSphere 7. The architect wants the backup solution to perform the following:

- > Full virtual machine image backup and restore
- > Incremental virtual machine image backup and restore
- > File level backup and restore within both Windows and Linux virtual machines
- > LAN-free backup

Which functional requirement should the architect include in the design of the new backup solution?

- A. The backup solution must leverage the VMware Consolidated Backup (VCB) framework.
- B. The backup solution must leverage virtual machine snapshots.
- C. The backup solution must leverage VMware vSphere Storage APIs - Data Protection.
- D. The backup solution must leverage VMware vStorage APIs for Data Protection (VADP).

Answer: C

NEW QUESTION 11

An architect is designing a new greenfield environment with 600 ESXi hosts in an automated fashion. The engineering department already has a PXE Boot server, TFTP server, and DHCP server set up with an NFS mount for their current Linux servers.

The architect must be able to demonstrate and meet a security requirement to have all infrastructure processes separated.

Which recommendation should the architect make for the ESXi host deployment?

- A. Request an isolated network segment to use and dedicate it to Auto Deploy functions
- B. Ask the business to expand the engineering environment to service the virtual environment as well
- C. Request a common shared network with flexible security measures to accommodate different auto deployment options
- D. Deploy each ESXi host individually and document it to satisfy security requirements

Answer: A

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.esxi.install.doc/GUID-8DAC6FEE-0441-4072>

NEW QUESTION 15

Refer to the exhibit.

During a requirements gathering workshop, a customer shares the following diagram regarding their availability service-level agreements (SLAs):



The customer states that there is no application level availability for legacy applications.

Which recommendation could the architect make to meet the customer's high availability requirements for the legacy applications virtual machines?

- A. Enable vSphere HA and add a VM Override with VM Restart Priority set to Disabled
- B. Enable Fault Tolerance
- C. Achieve application availability with snapshots
- D. Enable vSphere HA and add a VM Override with VM Restart Priority set to Lowest

Answer: D

NEW QUESTION 19

The Chief Operating Officer (COO) at an organization raises concerns that their virtual infrastructure environment is vulnerable. Recently, a security-related issue with a virtual machine caused all management services to become unavailable. No budget is available in the short term for additional platform investment. An architect is asked to review the current environment and make recommendations to mitigate concerns.

A virtualization administrator has provided the following details:

- > There is a single four node cluster of ESXi servers
- > There are two, Layer 2, physical network switches connecting resources
- > The data center network is presented as a single /16 subnet

Given the information provided, which functional requirement should the architect include in the design to mitigate the COOs concerns?

- A. The virtual infrastructure environment must connect application virtual machines and management services to new physical network switches
- B. The virtual infrastructure environment must connect application virtual machines and management services to separate distributed virtual switches (DVS)
- C. The virtual infrastructure environment must connect application virtual machines and management services to separate VLANs
- D. The virtual infrastructure environment must connect management services to a vSphere standard switch (VSS)

Answer: D

NEW QUESTION 23

A Cloud Service Provider wants to introduce backup as a service for a customer's vSphere-based virtual machines. The following information is noted:

- All top-of-rack (ToR) switches are 10 GbE and fully populated
- The backup traffic must not impact existing services

Which two recommendations should the architect make to help the customer incorporate the service? (Choose two.)

- A. Enable and tag traffic on the backup distributed port group
- B. Add a new two-port 10 GbE NIC per ESXi host
- C. Replace the existing NIC with a two-port 25 GbE NIC per ESXi host
- D. Match the Class of Service (CoS) and Differentiated Services Code Point (DSCP) values to the physical network
- E. Create a new virtual switch using the 1 GbE uplinks

Answer: AB

NEW QUESTION 26

What is a benefit of using a scale-out method for handling vSphere cluster growth?

- A. An increase in the recovery time objective (RTO) for the cluster
- B. Faster to reach the limit of virtual machines per host
- C. An overall reduction in the license costs for the cluster
- D. Less potential impact to virtual machines during a single host failure

Answer: B

NEW QUESTION 28

An architect is considering placement of virtual machines within an existing VMware software-defined data center (SDDC). During the discovery phase, the following information is documented:

Cluster One

- Six ESXi hosts
- vSphere HA with host failures cluster tolerates = 1
- Proactive HA is enabled and set to automated
- Fully Automated vSphere DRS
- Transparent Page Sharing (TPS) is enabled

Cluster Two

- Eight ESXi hosts
- vSphere HA with host failures cluster tolerates = 1
- Proactive HA is disabled
- Partially Automated vSphere DRS
- Transparent Page Sharing (TPS) is disabled

Cluster Three

- Three ESXi hosts
- vSphere HA with admission control is disabled
- Proactive HA is not supported
- Transparent Page Sharing (TPS) is disabled

Virtual Machine Resource Profile 1

- Memory sharing techniques should not be used
- Virtual machines should be automatically restarted in the event of host failure if resources are available
- Automated initial virtual machine placement

Virtual Machine Resource Profile 2

- Memory sharing techniques can be used
- Virtual machines should be protected from any host hardware failures
- Automated initial virtual machine placement

Which two recommendations should the architect make for placement of the virtual machines to meet resource profile requirements? (Choose two.)

- A. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster One.
- B. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster One.
- C. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Two.
- D. All virtual machines matching Virtual Machine Resource Profile 1 should be placed on Cluster Two.
- E. All virtual machines matching Virtual Machine Resource Profile 2 should be placed on Cluster Three.

Answer: BD

NEW QUESTION 30

An architect is finalizing the design for a new vSphere platform based on the following information:

- All Windows virtual machines will be hosted on a dedicated cluster for licensing purposes.
- All Linux virtual machines will be hosted on a dedicated cluster for licensing purposes. All management virtual machines will be hosted on a dedicated cluster.
- A total of ten physical sites will be used to host virtual machines.
- In the event of one physical datacenter becoming unavailable, the manageability of the virtual infrastructure in the remaining data centers should not be impacted.
- Access to configure the management virtual machines via vCenter Server must be controlled through the management Active Directory domain.
- Access to configure the Windows and Linux virtual machines must be controlled through the resource Active Directory domain.
- The management and resource Active Directory domains are part of separate Active Directory forests and do not have any trusts between them.
- The design will use Active Directory with Integrated Windows Authentication.

How should the architect document the vCenter Server configuration for this design?

- A. Deploy a vCenter server for the management cluster. Deploy a vCenter Server for all remaining cluster
- B. Create a shared SSO domain for each physical site.
- C. Deploy a vCenter Server for the management cluster. Deploy a vCenter Server for all remaining cluster
- D. Create a shared SSO domain across all physical sites.
- E. Deploy a vCenter Server for the management cluster with a dedicated SSO domain. Deploy a vCenter Server for all remaining clusters and use a dedicated SSO domain for each physical site.
- F. Deploy a vCenter Server for the management cluster with a dedicated SSO domain. Deploy a vCenter Server for all remaining clusters and use a dedicated SSO domain into a single physical site.

Answer: B

NEW QUESTION 31

An architect is designing a VMware solution for a customer to meet the following requirements:

- > The solution must use investments in existing storage array that supports both block and file storage.
- > The solution must support the ability to migrate workloads between hosts within a cluster.
- > The solution must support resource management priorities.
- > The solution must support the ability to connect virtual machines directly to LUNs.
- > The solution should use existing 32G fabric infrastructure.
- > There is no budget for additional physical hardware.

Which design decision should the architect make to meet these requirements?

- A. The ESXi hosts will leverage Fibre Channel (FC).
- B. The ESXi hosts will leverage iSCSI.
- C. The ESXi hosts will leverage Fibre Channel over Ethernet (FCoE).
- D. The ESXi hosts will leverage NFS.

Answer: A

NEW QUESTION 35

During a requirements gathering workshop, the customer provides the following requirement that is pertinent to the design of a new vSphere environment:

- > The Maximum Tolerable Downtime (MTD) for all Tier 1 applications is one hour. Which requirement classification is being gathered for the design documentation?

- A. Manageability
- B. Performance
- C. Availability
- D. Recoverability

Answer: C

NEW QUESTION 37

An architect is designing a solution for an environment with two types of resource profiles that must be virtualized. The first type consists of Tier 1 virtual machines that are disk I/O intensive, but do NOT require high CPU or memory. The second type consists of Tier 2 virtual machines that require a lower CPU and memory allocation and have minimal disk I/O.

Which design recommendation should the architect make for distributing the resource profiles?

- A. Separate the two resource profiles into two cluster
- B. The Tier 1 cluster will have fast storage while the Tier 2 cluster will not.
- C. Run both resource profiles on the same cluster with the same host hardware platform.
- D. Separate the two resource profiles into two cluster
- E. The Tier 2 cluster will have faster CPU and more memory while the Tier 1 cluster will have slower CPU and less memory but more disk space.
- F. Run both resource profiles on the same cluster with host hardware that has fast CPU, large amounts of memory, and the fastest storage platform.

Answer: D

NEW QUESTION 39

A customer provides the following list of requirements for their vSphere platform:

- > REQ01 The solution should utilize dual network connections to eliminate single points of failure.
- > REQ02 The solution should allow logs to be retained for a period of 30 days.
- > REQ03 All user access to the platform should be recorded for audit purposes.
- > REQ04 The solution should allow the management of multiple ESXi hosts.
- > REQ05 The solution should allow users to view the remote console of virtual machines.

Which two of the listed requirements would be classified as non-functional requirements? (Choose two.)

- A. The solution should utilize dual network connections to eliminate single points of failure
- B. The solution should allow the management of multiple ESXi hosts
- C. The solution should allow users to view the remote console of virtual machines
- D. All user access to the platform should be recorded for audit purposes
- E. The solution should allow logs to be retained for a period of 30 days

Answer: AE

NEW QUESTION 42

An architect is designing a new VMware software-defined data center (SDDC) using vSphere 7 to meet the following requirements:

- > The SDDC must be deployed at two locations: primary and secondary.
- > vSphere Replication must be used to replicate virtual machines between the two locations.

- > Site Recovery Manager must be used to orchestrate disaster recovery (DR) activities.
- > One single-sign on (SSO) domain must be used to authenticate access at both locations. Which design decision should the architect make to meet these requirements?

- A. A vCenter Server Appliance will be deployed to each site
- B. Unique SSO domains will be created per site.
- C. A vCenter Server will be installed on Windows virtual machines deployed to both sites.
- D. A vCenter Server Appliance will be deployed to each site.
- E. A vCenter Server Appliance will be deployed to the primary site only.

Answer: D

NEW QUESTION 44

Which requirement would be classified as a functional requirement within the application design documentation?

- A. The application must be hosted with redundancy levels of N+1 or better.
- B. Penetration testing must be executed quarterly with a pass rate of 80% or higher.
- C. The application must be capable of handling 200 transactions per second.
- D. Administrators must monitor the network traffic of the desired systems.

Answer: C

NEW QUESTION 47

An architect is preparing a design for a customer. Based on requirements, the architect recommends an HCI- based infrastructure with all-flash architecture. During the assessment, it is confirmed that the network throughput generated by virtual machines does not exceed 150 Mb/s.

What is the minimum number and type of network adapters in each server that the architect can recommend to ensure requirements are met and there is no single point of failure?

- A. Two 1 GbE network adapters per server
- B. Four 1 GbE network adapters per server
- C. Four 10 GbE network adapters per server
- D. Two 10 GbE network adapters per server

Answer: C

NEW QUESTION 48

A customer defines a requirement to minimize the vMotion migration time during a maintenance period. The servers being used are equipped with eight 1 GbE network adapters.

Per the defined logical network configuration, there are two network adapters each used for:

- > Management traffic
- > vMotion traffic
- > iSCSI traffic
- > Virtual machine traffic

Which design decision should the architect make to meet the customer requirement?

- A. Use Network I/O Control to define a reservation for vMotion traffic.
- B. Implement Multi-NIC vMotion by adding additional vMotion VMkernels.
- C. Configure a dedicated TCP/IP stack for vMotion traffic.
- D. Combine vMotion and Management traffic to make use of four adapters.

Answer: A

NEW QUESTION 51

Which two of the listed requirements would be classified as manageability non-functional requirements? (Choose two.)

- A. ESXi clusters must scale when compute resources are sustained above 70% for five business days
- B. vSphere Fault Tolerance must be supported to improve application uptime
- C. ESXi host updates must be installed within one week of release
- D. The vSphere environment must support administrator password rotation
- E. ESXi clusters must scale to 500 concurrent virtual machines

Answer: AC

NEW QUESTION 53

A new real-time financial service application is being developed by the engineering team at a financial firm and will be released as a public Software-as-a-Service (SaaS) offering. The solutions architect has designed and deployed a new vSphere environment and the supporting network infrastructure for hosting all public services. ESXi hosts are configured to use Precision Time Protocol (PTP) and a local stratum-1 network time server.

Application provisioning and scaling will be managed by VMware vRealize Automation and can be run on Microsoft Windows or multiple distributions of Linux.

Which three recommendations should the architect include in the design to ensure that the service maintain timekeeping within an accuracy of one second? (Choose three.)

- A. Use Microsoft Windows Server as the guest operating system.
- B. Configure the chrony time-sync agent on each virtual machine guest operating system.
- C. Set the virtual hardware device to use Host System Time (NTP) for each virtual machine running the application.
- D. Add a precision clock virtual device to each virtual machine running the application.
- E. Use a Linux distribution as the guest operating system.
- F. Add a virtual watchdog timer (VWDT) device to each virtual machine running the application.

Answer: ABC

NEW QUESTION 57

An architect decides to separate virtual desktops and application servers into separate vSphere clusters to meet security and management requirements. What are two implications of this design decision? (Choose two.)

- A. There will be an increase in management overhead.
- B. Identical hardware must be procured for all hosts.
- C. There will be a reduction in performance.
- D. The patching cycles will affect both clusters at the same time.
- E. There will be additional licensing and cost requirements for both clusters.

Answer: DE

NEW QUESTION 62

During a requirements gathering workshop, the customer provides the following requirement (REQ) and constraints (CON):

- > REQ01: The customer is looking for a way to limit database virtual machine (VM) placement to save on CPU licensing costs.
- > CON01: There is a single cluster with no budget to scale.
- > CON02: All virtual machines must run on the consolidated cluster.

Which two design decisions should the architect make to meet the customer requirement? (Choose two.)

- A. The solution must use VM-VM anti-affinity rules
- B. The solution must use vSphere DRS in manual mode
- C. The solution must use a vRealize Orchestrator workflow for VM placement
- D. The solution must use VM-Host affinity rules
- E. The solution must use vSphere VM and host DRS groups

Answer: DE

NEW QUESTION 66

An architect is reviewing a physical storage design. The customer has specified that a new active-passive based storage array will be used to provide storage for the vSphere clusters.

Which configuration should for the architect recommended?

- A. VMW_SATP_LOCAL
- B. VMW_PSP_MRU
- C. VMW_SATP_DEFAULT_AA
- D. VMW_PSP_FIXED

Answer: B

NEW QUESTION 71

An architect is tasked with designing a new VMware software-defined data center (SDDC) solution for an online retail customer who has a primary and secondary data center as well as 10 distribution hubs.

The customer has provided the following business requirements to help inform the design:

- > The solution must support the running of up to 1,000 concurrent virtual machines across the primary and secondary data center.
- > The solution must support the running of up to 20 concurrent virtual machines in each distribution hub.
- > The solution must support the separation of management and lines-of-business application virtual machines.
- > All management components (including directory services, backup, automation, operations and logging) must be deployed to the primary data center.
- > All virtual infrastructure components must have redundancy of N+1.
- > The solution should support a monthly uptime target of 99.9%.
- > The recovery time objective (RTO) for the solution must be four hours.
- > The recovery point objective (RPO) for the solution must be 24 hours.

Given the information from the customer, which assumption should the architect include in the design?

- A. All business application virtual machines can be deployed into a single cluster within the primary data center.
- B. Each distribution hub should be configured with a backup device.
- C. The wide area network has sufficient bandwidth to support centralized management.
- D. Each cluster will have a minimum of four hosts.

Answer: B

NEW QUESTION 76

A customer has six hosts available in a cluster. When running at full capacity, all virtual machines can be run on two hosts.

How many hosts can the customer place into maintenance mode at the same time while still providing N+2 resiliency to the cluster?

- A. Two
- B. Three
- C. One
- D. None

Answer: A

NEW QUESTION 81

A new vSphere platform is being created. The platform will host virtual machines that will run management services and line-of-business applications.


What should the architect consider when designing the number and type of clusters required?

- A. Maximum tolerable downtime
- B. Predicted platform growth
- C. Auditing requirements for the virtual machines
- D. The level of isolation required between virtual machine classifications

Answer: D

NEW QUESTION 85

Refer to the exhibit.

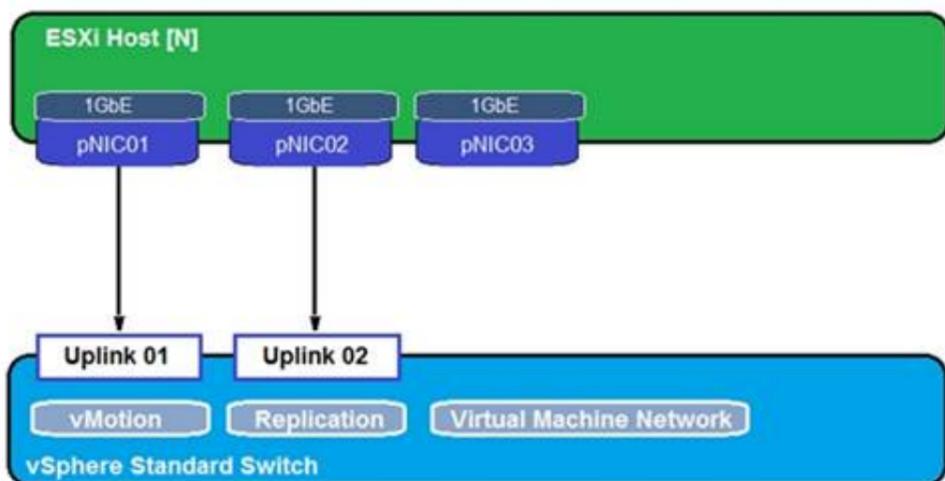

During a requirements gathering workshop, the customer shares the following about their existing ESXi host virtual networking infrastructure:
The customer confirms that:

- > Each ESXi host has approximately 200 virtual machines.
- > They want to maximize the number of concurrent virtual machine migrations.
- > When placing a host in maintenance mode, it takes a long time to evacuate the virtual machines. Which two recommendations should the architect make in order to help the customer overcome their challenge? (Choose two.)

- A. Configure the network to use MTU for the VMotion VMKernel to 1,600 bytes
- B. Configure the network to use MTU for the VMotion VMKernel to 9,000 bytes
- C. Create an additional standard switch with pNIC3 to use for vMotion
- D. Use the 3 pNICs and bundle them in a link aggregation group (LAG) configuration
- E. Use 10 GbE NICs instead of 1 GbE

Answer: CE

NEW QUESTION 87

Application owners require support of a Microsoft Windows Server Failover Cluster (WSFC).
Their current environment consists of the following components:

- > vSphere 7.0 and vSAN 7.0
- > External array supporting NFS 3.0/4.1, Server Message Block (SMB) 2.1
- > 10 GbE storage connectivity for all devices

The solution architect is tasked with coming up with a solution to meet this requirement while utilizing their existing investments.
Which two recommendations could the architect make? (Choose two.)

- A. Use vSAN native support for WSFC
- B. Use NFS 4.1 shares for quorum and shared disk
- C. Use raw device mapping (RDM)
- D. Use the SMB 2.1 protocol for sharing disks
- E. Run WSFC on vSAN iSCSI Target Service

Answer: AE

Explanation:

<https://blogs.vmware.com/virtualblocks/2018/04/18/vsan-6-7-introducing-wsfc-support-vsan>

NEW QUESTION 92

An architect is designing a new vSphere environment with the following resources:

- > 600 vCPU
- > 5,760 GB RAM

Average resource usage is:

- > 60 vCPU
- > 1,152 GB RAM

The design must meet the following requirements:

- > The environment has the ability to burst by 25%.
- > Each host can schedule 36 vCPUs and has 512 GB RAM.
- > Management overhead is 20%.

What is the minimum number of hosts required to meet the design requirements?

- A. Three
- B. Five
- C. Four
- D. Two

Answer: D

NEW QUESTION 95

An architect has 50 ESXi hosts to deploy and DHCP servers are not allowed on any network. Which automated host deployment method should the architect use?

- A. Stateless vSphere Auto Deploy
- B. Stateful vSphere Auto Deploy
- C. Scripted installation
- D. Interactive installation

Answer: C

NEW QUESTION 99

As part of a requirements gathering workshop, the customer provides the following requirements for the design of a new greenfield virtual infrastructure:

- > Some applications have a latency that must be less than 5 minutes.
- > The solution must be able to support a workload growth rate of 10% per year. Which requirement classification is being gathered for the design documentation?

- A. Performance
- B. Manageability
- C. Recoverability
- D. Availability

Answer: A

NEW QUESTION 100

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your 3V0-21.23 Exam with Our Prep Materials Via below:

<https://www.certleader.com/3V0-21.23-dumps.html>