

NSE7_SDW-7.0 Dumps

Fortinet NSE 7 - SD-WAN 7.0

https://www.certleader.com/NSE7_SDW-7.0-dumps.html



NEW QUESTION 1

Refer to the exhibit.

```

config system virtual-wan-link
  set status enable
  set load-balance-mode source-ip-based
  config members
    edit 1
      set interface "port1"
      set gateway 100.64.1.254
      set source 100.64.1.1
      set cost 15
    next
    edit 2
      set interface "port2"
      set gateway 100.64.2.254
      set priority 10
    next
  end
end

```

Based on the output shown in the exhibit, which two criteria on the SD-WAN member configuration can be used to select an outgoing interface in an SD-WAN rule? (Choose two.)

- A. Set priority 10.
- B. Set cost 15.
- C. Set load-balance-mode source-ip-ip-based.
- D. Set source 100.64.1.1.

Answer: AB

NEW QUESTION 2

Refer to the exhibit, which shows the IPsec phase 1 configuration of a spoke.

```

config vpn ipsec phase1-interface
  edit "T_INET_0_0"
    set interface "port1"
    set ike-version 2
    set keylife 28800
    set peertype any
    set net-device disable
    set proposal aes128-sha256 aes256-sha256 aes128gcm-prfsha256 aes256gcm-prfsha384
    chacha20poly1305-prfsha256
    set comments "[created by FMG VPN Manager]"
    set idle-timeout enable
    set idle-timeoutinterval 5
    set auto-discovery-receiver enable
    set remote-gw 100.64.1.1
    set psksecret ENC
    6D5rVsaKlMeAyVYt1z95BS24Psew761wY023hnFVviwb6deIt8c51tCa+iNYhujT8gycfD4+WuszpmuIv8rRzrVh
    7DFkHaW2auAAprQ0dHUfaCzjOhME7mPw+8he2xB7Edb9ku/nZEhb0cKLkKYJc/p9J9IMweV21ZUgFjvIpXNxHxpH
    LReOFShoH01SPFKz5IYCVA==
  next
end

```

What must you configure on the IPsec phase 1 configuration for ADVPN to work with SD-WAN?

- A. You must set ike-version to 1.
- B. You must enable net-device.
- C. You must enable auto-discovery-sender.
- D. You must disable idle-timeout.

Answer: B

NEW QUESTION 3

Refer to the exhibit.

```

config system sdwan
  set status enable
  set load-balance source-dest-ip-based
  config zone
    edit "virtual-wan-link"
    next
    edit "SASE"
    next
    edit "underlay"
    next
  end
  config members
    edit 1
      set interface "port1"
      set zone "underlay"
      set gateway 192.2.0.2
    next
    edit 2
      set interface "port2"
      set zone "underlay"
      set gateway 192.2.0.10
    next
  end
  ...
end

```

Which algorithm does SD-WAN use to distribute traffic that does not match any of the SD-WAN rules?

- A. All traffic from a source IP to a destination IP is sent to the same interface.
- B. All traffic from a source IP is sent to the same interface.
- C. All traffic from a source IP is sent to the most used interface.
- D. All traffic from a source IP to a destination IP is sent to the least used interface.

Answer: A

NEW QUESTION 4

Which two conclusions for traffic that matches the traffic shaper are true? (Choose two.)

```

# diagnose firewall shaper traffic-shaper list name VoIP_Shaper
name VoIP_Shaper
maximum-bandwidth 6250 KB/sec
guaranteed-bandwidth 2500 KB/sec
current-bandwidth 93 KB/sec
priority 2
overhead 0
tos ff
packets dropped 0
bytes dropped 0

```

- A. The traffic shaper drops packets if the bandwidth is less than 2500 KBps.
- B. The measured bandwidth is less than 100 KBps.
- C. The traffic shaper drops packets if the bandwidth exceeds 6250 KBps.
- D. The traffic shaper limits the bandwidth of each source IP to a maximum of 6250 KBps.

Answer: BC

NEW QUESTION 5

Refer to the exhibit.

```

config vpn ipsec phase1-interface
  edit "T_INET_0_0"
    set type dynamic
    set interface "port1"
    set keylife 28800
    set peertype any
    set net-device disable
    set proposal aes128-sha256
    set add-route enable
    set psksecret ENC
    Zv9n4Urfk0W4jj8vWI+KywxBG42DT7jWHKd8YaL8j4+pRpY0x/N7mSgc7VL0BW22HQUXWJ6zvFxNKktiPYntA8aP
    i6ly7gDx2lP/OfKexTQQJzgCGRYzLM8eFTOnK7K6AuX0bFDCpBBhEidf+03CYBMLwkFZmdU6RsT+qvybb1VX+Ioy
    HK5EXakpmz5RiltELgZ9Gg==
  next
end

```

Which configuration change is required if the responder FortiGate uses a dynamic routing protocol to exchange routes over IPsec?

- A. type must be set to static.
- B. mode-cfg must be enabled.
- C. exchange-interface-ip must be enabled.
- D. add-route must be disabled.

Answer: D

Explanation:

for using "non ike" routes (for example BGP/static and so on) you must do disable the add-route that inject automatically kernel route based on p2 selectors from the remote site from the SD-WAN_7.2_Study_Guide page 236

NEW QUESTION 6

Refer to the exhibit.

```
branch1_fgt # diagnose sys sdwan service 3

Service(3): Address Mode(IPV4) flags=0x200 use-shortcut-sla
Gen(5), TOS(0x0/0x0), Protocol(0: 1->65535), Mode(priority), link-cost-
factor(latency), link-cost-threshold(10), health-check(VPN_PING)
Members(3):
  1: Seq_num(3 T_INET_0_0), alive, latency: 101.349, selected
  2: Seq_num(4 T_INET_1_0), alive, latency: 151.278, selected
  3: Seq_num(5 T_MPLS_0), alive, latency: 200.984, selected
Src address(1):
  10.0.1.0-10.0.1.255

Dst address(1):
  10.0.0.0-10.255.255.255

branch1_fgt (3) # show
config service
edit 3
  set name "Corp"
  set mode priority
  set dst "Corp-net"
  set src "LAN-net"
  set health-check "VPN_PING"
  set priority-members 3 4 5
next
end
```

The exhibit shows the SD-WAN rule status and configuration.

Based on the exhibit, which change in the measured latency will make T_MPLS_0 the new preferred member?

- A. When T_INET_0_0 and T_MPLS_0 have the same latency.
- B. When T_MPLS_0 has a latency of 100 ms.
- C. When T_INET_0_0 has a latency of 250 ms.
- D. When T_MPLS_0 has a latency of 80 ms.

Answer: D

NEW QUESTION 7

Which two settings can you configure to speed up routing convergence in BGP? (Choose two.)

- A. update-source
- B. set-route-tag
- C. holdtime-timer
- D. link-down-failover

Answer: CD

NEW QUESTION 8

Refer to the exhibit.

```
config system settings
  set firewall-session-dirty check-new
end
```

Based on the exhibit, which two actions does FortiGate perform on sessions after a firewall policy change? (Choose two.)

- A. FortiGate flushes all sessions.
- B. FortiGate terminates the old sessions.
- C. FortiGate does not change existing sessions.
- D. FortiGate evaluates new sessions.

Answer: CD

Explanation:

FortiGate not to flag existing impacted session as dirty by setting firewall-session-dirty to check new. The results is that FortiGate evaluates only new session against the new firewall policy.

NEW QUESTION 9

Refer to the exhibits.
Exhibit A

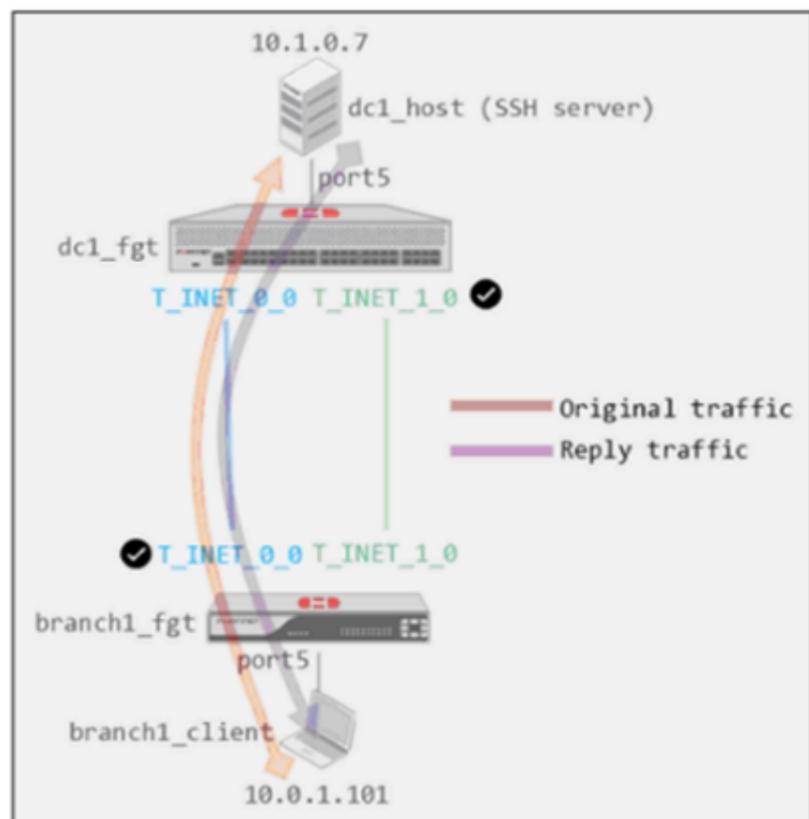


Exhibit B

```
dc1_fgt # show system global
config system global
  set admin-https-redirect disable
  set admintimeout 480
  set alias "FortiGate-VM64"
  set hostname "dc1_fgt"
  set timezone 04
end

dc1_fgt # show system settings
config system settings
  set tcp-session-without-syn enable
  set allow-subnet-overlap enable
  set gui-allow-unnamed-policy enable
  set gui-multiple-interface-policy enable
end
```

Exhibit A shows a site-to-site topology between two FortiGate devices: branch1_fgt and dc1_fgt. Exhibit B shows the system global and system settings configuration on dc1_fgt.

When branch1_client establishes a connection to dc1_host, the administrator observes that, on dc1_fgt, the reply traffic is routed over T_INET_0_0, even though T_INET_1_0 is the preferred member in the matching SD-WAN rule.

Based on the information shown in the exhibits, what configuration change must be made on dc1_fgt so dc1_fgt routes the reply traffic over T_INET_1_0?

- A. Enable auxiliary-session under config system settings.
- B. Disable tcp-session-without-syn under config system settings.
- C. Enable snat-route-change under config system global.
- D. Disable allow-subnet-overlap under config system settings.

Answer: A

Explanation:

Controlling return path with auxiliary session When multiple incoming or outgoing interfaces are used in ECMP or for load balancing, changes to routing, incoming, or return traffic interfaces impacts how an existing sessions handles the traffic. Auxiliary sessions can be used to handle these changes to traffic patterns.
<https://docs.fortinet.com/document/fortigate/7.0.11/administration-guide/14295/controlling-return-path>

NEW QUESTION 10

Exhibit.

```
id=20010 trace_id=1402 func=print_pkt_detail line=5588 msg="vd-root:0 received a
packet(proto=6, 10.1.10.1:52490->42.44.50.10:443) from port3. flag [.], seq 1213725680,
ack 1169005655, win 65535"
id=20010 trace_id=1402 func=resolve_ip_tuple_fast line=5669 msg="Find an existing
session, id=00001ca4, original direction"
id=20010 trace_id=1402 func=fw_forward_dirty_handler line=447 msg="Denied by quota
check"
```

Which conclusion about the packet debug flow output is correct?

- A. The total number of daily sessions for 10.1.10.1 exceeded the maximum number of concurrent sessions configured in the traffic shaper, and the packet was dropped.
- B. The packet size exceeded the outgoing interface MTU.
- C. The number of concurrent sessions for 10.1.10.1 exceeded the maximum number of concurrent sessions configured in the traffic shaper, and the packet was dropped.
- D. The number of concurrent sessions for 10.1.10.1 exceeded the maximum number of concurrent sessions configured in the firewall policy, and the packet was dropped.

Answer: C

NEW QUESTION 10

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your NSE7_SDW-7.0 Exam with Our Prep Materials Via below:

https://www.certleader.com/NSE7_SDW-7.0-dumps.html