



VMware

Exam Questions 3V0-21.23

VMware vSphere 8.x Advanced Design

NEW QUESTION 1

After adding a new vSphere ESXi host with identical hardware configuration to an existing vSphere cluster, which task would an administrator complete prior to checking the compliance with an existing host profile?

- A. Attach the host profile to the new host
- B. Duplicate the host profile
- C. Copy the host settings from the new host
- D. Import the host profile

Answer: A

Explanation:

The task that should be completed prior to checking the compliance with an existing host profile is to attach the host profile to the new host, which allows applying the configuration template of the reference host to the new host.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.hostprofiles.doc/GUID-0E5BF330-A76> <https://www.nakivo.com/blog/how-to-create-and-set-up-vmware-vsphere-host-profiles/>

NEW QUESTION 2

An administrator is tasked with adding two additional hosts into an existing production vSphere cluster to support the need for additional capacity.

The vSphere cluster currently has four identically configured ESXi hosts (esx01, esx02, esx03 and esx04) that utilize Intel Skylake-based CPUs. The two new hosts (esx05 and esx06) are configured identically in terms of memory and storage to the existing hosts: but utilize Intel Ice Lake-based CPUs.

The administrator must ensure that:

- Any virtual machine migrates to any of the six ESXi hosts running in the cluster.
- There is no virtual machine downtime during the process of adding the new hosts. Which step should the administrator take to meet these requirements?

- A. Create a new vSphere cluster with Enhanced vMotion Compatibility (EVC) enabled and move all hosts into the new cluster
- B. Create a new vSphere cluster and move only three hosts into the new cluster.
- C. Configure Enhanced vMotion Compatibility (EVC) mode on the existing cluster and add the two new hosts into the cluster.
- D. Create a new vSphere cluster with vSphere High Availability (HA) enabled and move all hosts into the new cluster

Answer: C

Explanation:

The step that the administrator should take to meet these requirements is to configure Enhanced vMotion Compatibility (EVC) mode on the existing cluster and add the two new hosts into the cluster. EVC mode allows migration of virtual machines between different generations of CPUs by masking unsupported processor features. EVC mode can be enabled on an existing cluster without affecting powered-on virtual machines. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vcenterhost.doc/GUID-9F444D9B-44A>

<https://blogs.vmware.com/vsphere/2019/06/enhanced-vmotion-compatibility-evc-explained.html>

NEW QUESTION 3

An administrator is required to configure several Microsoft Windows virtual machines (VMs) to support

Secure Boot for a critical secure application. The following information is provided:

- The corporate security policy states that all forms of data encryption must utilize a key provider.
 - The firmware of each VM is currently set to use Unified Extensible Firmware Interface (UEFI).
 - Due to the nature of the application running within the VMs, the guest operating system for each VM is currently a minimum of Windows Server 2008 and Windows 7.
- Which security feature should the administrator implement to meet these requirements?

- A. vSphere Virtual Machine Encryption
- B. vSphere Visualization-Based Security
- C. Virtual Intel Software Guard Extensions (vSGX)
- D. Virtual Trusted Platform Module (vTPM)

Answer: D

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-security/GUID-6F811A7A-D58B-47B4-84B4-7339> A vTPM is a virtualized version of a physical TPM and is used to protect VMs and their data by tying the

cryptographic functions to the hardware of the server on which the VMs are running¹². This allows for secure boot, disk encryption, and other security features¹². It also supports key providers, which is a requirement in this case¹².

NEW QUESTION 4

An administrator needs to update a VMware vCenter instance to a newer minor release version. Due to restrictions within the environment, the vCenter instance does not have access to the Internet. As a first step, the administrator downloads the required update on another machine.

What are the next steps the administrator must perform to complete the update? A Place the update ISO file in a Virtual Machine File System (VMFS) datastore. ' Use the vSphere Client to select the update ISO file as the source for the update.

- A. Place the update ISO file in a Virtual Machine File System (VMFS) datastore. Use the vSphere Client to select the update ISO file as the source for the update
- B. Mount the ISO update file to the CD-ROM drive of the vCenter instance. Use the vCenter Management Interface to select the CD-ROM as the source for the update
- C. Place the ISO update file in a folder accessible to the vCenter instance over HTTPS. Use the vCenter Management Interface to select the update file as the source for the update
- D. Place the ZIP update file in a folder accessible to the vCenter instance over HTTPS. Use the vSphere Client to select the update file as the source for the update.

Answer: B

Explanation:

<https://4sysops.com/archives/three-ways-to-update-vmware-vcenter-server-appliance-vcsa/>

NEW QUESTION 5

An administrator has mapped three vSphere zones to three vSphere clusters.

Which two statements are true for this vSphere with Tanzu zonal Supervisor enablement? (Choose two.)

- A. One Supervisor will be created in a specific zone.
- B. One Supervisor will be created across all zones.
- C. Three Supervisors will be created in Linked Mode.
- D. Individual vSphere Namespaces will be placed into a specific zone.
- E. Individual vSphere Namespaces will be spread across all zones.

Answer: BE


Explanation:

For a vSphere with Tanzu zonal Supervisor enablement where three vSphere zones are mapped to three vSphere clusters, the following two statements are true:

- B. One Supervisor will be created across all zones. In a three-zone deployment, all three vSphere clusters become one Supervisor.
- E. Individual vSphere Namespaces will be spread across all zones. You can distribute the nodes of your Tanzu Kubernetes Grid clusters across all three vSphere zones, thus providing HA for your Kubernetes workloads at a vSphere cluster level.

NEW QUESTION 6

Refer to the exhibit.

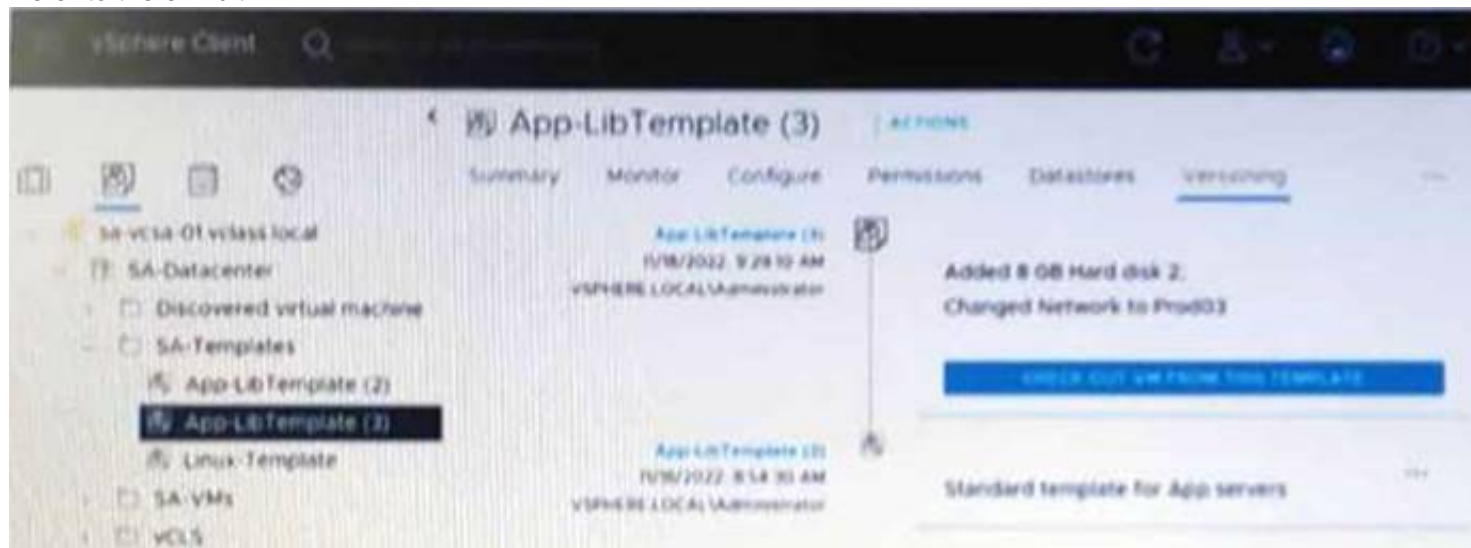

Given the configuration shown in the exhibit, what must the administrator do to delete only the latest version of the template?

- A. Delete App-LibTemplate (3) from the SA-Templates folder.
- B. In the SA-template folder, rename App-Libtemplate (2) to App-LibTemplate
- C. Check out AppLibTemplate (3) and delete the template from the SA-Templates folder.
- D. Revert to APP-LibTemplate (2) and delete App-LibTemplate (3).

Answer: D

Explanation:

Option D is correct because it allows the administrator to delete only the latest version of the template by reverting to the previous version and then deleting the current version. Option A is incorrect because it deletes the entire template and not just the latest version. Option B is incorrect because it renames the previous version to the current version and does not delete anything. Option C is incorrect because it checks out the latest version and deletes it from the folder, but not from the library. References:

https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm_admin.doc/GUID-9F9E3F8C-0E2

NEW QUESTION 7

An administrator is tasked with providing users access to objects within an existing VMware vCenter instance. The vCenter inventory has a single data center with one management vSphere cluster and five workload vSphere clusters.

The following requirements must be met for assigning the users access:

- Users must only be able to view all of the inventory objects associated with the management vSphere cluster.
- Users must be able to edit all of the inventory objects associated with the workload vSphere clusters. The administrator creates a custom role to provide the permissions needed to allow users to edit inventory objects.

Which series of steps should the administrator complete to assign the custom role and provide the required level of access to users?

- A. Apply Global permissions to assign the Read Only role to the root vCenter object. Apply vCenter permissions to assign the custom role to the workload vSphere clusters and enable propagation.
- B. Apply Global permissions to assign the Read Only role to the root vCenter object and enable propagatio
- C. Apply vCenter permissions to assign the custom role to the workload vSphere clusters and enable propagation.
- D. Apply Global permissions to assign the Read Only role to the root vCenter objec
- E. Apply vCenter permissions to assign the custom role to the workload vSphere clusters.
- F. Apply Global permissions to assign the Read Only role to the root vCenter object and enable propagatio
- G. Apply vCenter permissions to assign the custom role to the workload vSphere clusters.

Answer: D

Explanation:

Option D is correct because it allows the administrator to apply Global permissions to assign the Read Only role to the root vCenter object and enable propagation, which will apply to all of the inventory objects in vCenter, and then apply vCenter permissions to assign the custom role to the workload vSphere clusters, which will override the Global permissions and allow users to edit all of the inventory objects associated with the

workload vSphere clusters. Option A is incorrect because it will not enable propagation for the Global permissions, which will limit the Read Only role to the root vCenter object only. Option B is incorrect because it will enable propagation for both the Global and vCenter permissions, which will create a conflict between the Read Only and custom roles. Option C is incorrect because it will not enable propagation for either the Global or vCenter permissions, which will limit the Read Only role to the root vCenter object only and the custom role to the workload vSphere clusters only. References: <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.security.doc/GUID-A2A4371A-B888>

NEW QUESTION 8

An administrator is configuring vSphere Lifecycle Manager to install patches to a vSphere cluster. The cluster runs workload virtual machines (VMs) that are incompatible with vSphere vMotion, and therefore cannot be live migrated between hosts during the installation of the patches. Which configuration in vSphere Lifecycle Manager will allow the administrator to reduce the downtime associated with the patching operation without migrating the VMs?

- A. Enable Distributed Power Management (DPM) and set the VM power state to the suspend to disk option
- B. Enable Quick Boot and set the VM power state to the suspend to disk option
- C. Enable vSphere High Availability (HA) admission control and set the VM power state to the suspend to memory option
- D. Enable Quick Boot and set the VM power state to the suspend to memory option

Answer: D

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-lifecycle-manager/GUID-06A5D316-9452-4A5D-A> The administrator should enable Quick Boot and set the VM power state to the suspend to memory option, which will allow the administrator to reduce the downtime associated with the patching operation without migrating the VMs. Quick Boot is a feature that skips the hardware initialization phase during host reboot, which reduces the system boot time. Suspend to memory is an option that preserves the state of the VMs in the host memory and restores them from memory after the reboot, which minimizes the VM downtime. These two features work together to optimize the remediation process and speed up the patching operation. References: <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere-lifecycle-manager.doc/GUID-5AF3C6>

NEW QUESTION 9

An administrator is working with VMware Support and is asked to provide log bundles for the ESXi hosts in an environment. Which three options does the administrator have? (Choose three.)

- A. Generate a combined log bundle for all ESXi hosts using the vCenter Management Interface.
- B. Generate a separate log bundle for each ESXi host using the vSphere Host Client.
- C. Generate a combined log bundle for all ESXi hosts using the vSphere Client.
- D. Generate a separate log bundle for each ESXi host using the vSphere Client.
- E. Generate a separate log bundle for each ESXi host using the vCenter Management Interface.
- F. Generate a combined log bundle for all ESXi hosts using the vSphere Host Client.

Answer: BCD

Explanation:

Option B, C and D are correct because they are valid methods to generate log bundles for individual or multiple ESXi hosts using different interfaces. Option A and E are incorrect because they are not possible options to generate log bundles for all ESXi hosts using the vCenter Management Interface. Option F is incorrect because it is not possible to generate a combined log bundle for all ESXi hosts using the vSphere Host Client. References: <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.troubleshooting.doc/GUID-9A94C3D1>

NEW QUESTION 10

An administrator needs to provide encryption for workloads within an existing vSphere cluster. The following requirements must be met:

- Workloads should be encrypted at rest.
- Encrypted workloads must automatically be encrypted during transit.
- Encryption should not require any specific hardware.

What should the administrator configure to meet these requirements?

- A. Encrypted vSphere vMotion
- B. Unified Extensible Firmware Interface (UEFI) Secure Boot
- C. Host Encryption
- D. VM Encryption

Answer: D

Explanation:

The feature that should be configured to provide encryption for workloads within an existing vSphere cluster without requiring any specific hardware is VM Encryption, which allows encrypting VMs at rest and during vMotion.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.security.doc/GUID-F8F105EC-A6EA>

NEW QUESTION 10

An administrator is tasked with applying updates to a vSphere cluster running vSAN using vSphere Lifecycle Manager. Downtime to the ESXi hosts must be minimal while the work is completed.

The administrator has already completed the following steps and no errors have been returned:

- Downloaded all applicable software and created a new Image
- Attached the new Image to the cluster and run a compliance check against the Image for the cluster
- Ran a remediation pre-check for the cluster

Which two series of steps should the administrator perform to start the remediation of the cluster using the new image? (Choose two.)

- A. * 1. Use the Remediate option in vSphere Lifecycle Manager to remediate all of the ESXi hosts in the cluster in parallel.* 2. Allow vSphere Lifecycle Manager to automatically control maintenance mode on the ESXi hosts.
- B. * 1. Place each of the ESXi hosts into maintenance mode manually.* 2. Use the Stage option in vSphere Lifecycle Manager to stage the required software on all

ESXi hosts one at a time.

C. * 1. Leave all ESXi hosts in the cluster operational.* 2. Use the Stage All option in vSphere Lifecycle Manager to stage the required software onto all ESXi hosts one at a time.

D. * 1. Leave all ESXi hosts in the cluster operational* 2. Use the Stage All option in vSphere Lifecycle Manager to stage the required software onto all ESXi hosts in the cluster in parallel.

E. * 1. Use the Remediate Option in vSphere Lifecycle Manager to remediate all of the ESXi hosts in the cluster in sequence.* 2. Allow vSphere Lifecycle Manager to automatically control maintenance mode on the ESXi host

Answer: AD

Explanation:

Option A and D are correct because they allow vSphere Lifecycle Manager to automatically control maintenance mode on the ESXi hosts and remediate them in parallel or in sequence. Option B and C are incorrect because they require manual intervention to place the hosts into maintenance mode or to stage the software on each host, which is not efficient or minimal downtime. References: <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere-lifecycle-manager.doc/GUID-9F9E3F8>

NEW QUESTION 14

An administrator has configured Storage I/O Control (SIOC) on a Virtual Machine File System (VMFS) datastore.

- The datastore supports 30,000 IOPS
- Storage I/O Control has been set to manual
- Storage I/O Control is triggered when latency hits 30 ms
- The datastore contains 3 virtual machines (VMs)
- A gold tier VM
- A silver tier VM
- A bronze tier VM

Assuming the datastore latency does not exceed 29ms, what is the maximum number of IOPS the bronze tier VM is entitled to?

A. A.-30,000B.20,000C.10,000D.5,000

Answer: A

Explanation:

The bronze tier VM is entitled to 30,000 IOPS, which is the maximum number of IOPS that the datastore supports. Storage I/O Control (SIOC) does not limit the IOPS of any VM unless the datastore latency exceeds the threshold, which is 30 ms in this case. Therefore, as long as the datastore latency is below 29 ms, the bronze tier VM can use up to 30,000 IOPS. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.resmgmt.doc/GUID-7686FEC3-1FAC>

NEW QUESTION 19

A VMkernel port is labelled PROD01 and uses the default TCP/IP stack. Currently, this VMkernel port is configured for supporting live virtual machine (VM) migrations.

Which configuration change should the administrator make to isolate live VM migration traffic from other network traffic?

- A. Remove PROD01 and create a new VMkernel port and set the TCP/IP stack to vSphere vMotion.
- B. Remove PROD01 and create a new VMkernel port with the TCP/IP stack set to provisioning.
- C. Create a new VMkernel port and set the TCP/IP stack to provisioning.
- D. Modify PROD01 by changing the TCP/IP stack to vSphere vMotion.

Answer: A

Explanation:

Select a TCP/IP stack from the list. Once you set a TCP/IP stack for the VMkernel adapter, you cannot change it later. If you select the vMotion or the Provisioning TCP/IP stack, you will be able to use only these stacks to handle vMotion or Provisioning traffic on the host. All VMkernel adapters for vMotion on the default TCP/IP stack are disabled for future vMotion sessions. If you set the Provisioning TCP/IP stack, VMkernel adapters on the default TCP/IP stack are disabled for operations that include Provisioning traffic, such as virtual machine cold migration, cloning, and snapshot migration.

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-networking/GUID-AA3656B0-005A-40A0-A293-43>

NEW QUESTION 23

What is the role of vSphere Distributed Services Engine?

- A. Provide a live shadow Instance of a virtual machine (VM) that mirror, the primary VM to prevent data loss and downtime during outages
- B. Implement Quality of Service (QoS) on network traffic within a vSphere Distributed Switch
- C. Provide hardware accelerated data processing to boost infrastructure performance
- D. Redistribute virtual machines across vSphere cluster host affinity rules following host failures or during maintenance operations

Answer: C

Explanation:

The role of vSphere Distributed Services Engine is to provide hardware accelerated data processing to boost infrastructure performance by offloading network services from the CPU to the DPU.

References: <https://core.vmware.com/resource/whats-new-vsphere-8>

NEW QUESTION 28

What are three options an administrator can configure after creating a vSphere Namespace? (Choose three.)

- A. Backup schedule
- B. Certificates
- C. Storage policies
- D. Update policies
- E. Permissions

F. Resource and Object limits

Answer: CEF

Explanation:

After creating a vSphere Namespace, three of the options that an administrator can configure are storage policies, which define how storage resources are allocated for objects within a namespace; permissions, which define who can access and manage objects within a namespace; and resource and object limits, which define how much CPU, memory, storage, and network resources can be consumed by objects within a namespace.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/vmware-vmware-with-tanzu/GUID-C2E9B5C1-D6F1-4E9B>

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-with-tanzu-services-workloads/GUID-177C23C4-E>

NEW QUESTION 32

An administrator is tasked with deploying a new on-premises software-defined data center (SDDC) that will contain a total of eight VMware vCenter instances. The following requirements must be met:

- All vCenter instances should be visible in a single vSphere Client session.
- All vCenter inventory should be searchable from a single vSphere Client session.
- Any administrator must be able to complete operations on any vCenter instance using a single set of credentials.

What should the administrator configure to meet these requirements?

- A. Two Enhanced Linked Mode groups consisting of four vCenter instances each in a Single Sign-On domain.
- B. A single Hybrid Linked Mode group consisting of four vCenter instances each in a Single Sign-On domain.
- C. A single Enhanced Linked Mode group consisting of eight vCenter instances in one Single Sign-On domain.
- D. A single Hybrid Linked Mode group consisting of eight vCenter instances in one Single Sign-On domain.

Answer: B

Explanation:

To meet the requirements of viewing and searching all vCenter instances and inventory with a single vSphere Client session and a single set of credentials, the administrator needs to configure a single Enhanced Linked Mode group consisting of eight vCenter instances in one Single Sign-On domain.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vcenterhost.doc/GUID-39A8C7F4-8D8>

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-vcenter-installation/GUID-4394EA1C-0800-4A6A->

NEW QUESTION 34

An administrator wants to allow a DevOps engineer the ability to delete Tanzu Kubernetes Grid (TKG) cluster objects in a vSphere Namespace. Which role would provide the minimum required permissions to perform this operation?

- A. Administrator
- B. Can View
- C. Owner
- D. Can Edit

Answer: D

Explanation:

The Can Edit role would provide the minimum required permissions to delete Tanzu Kubernetes Grid (TKG) cluster objects in a vSphere Namespace, as it allows creating, updating, and deleting objects within a namespace.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/vmware-vmware-with-tanzu/GUID-C2E9B5C1-D6F1-4E9B>

NEW QUESTION 36

An administrator is tasked with implementing a backup solution capable of backing up the Supervisor cluster, vSphere Pods, and persistent volumes. Which two solutions must be used to meet this requirement? (Choose two.)

- A. VMware vCenter
- B. Standalone Velero and Restic
- C. NSX-T Manager
- D. vSphere Host Client
- E. Velero Plugin for vSphere

Answer: BE

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/vmware-vmware-with-tanzu/GUID-9816E07A-466C-451D-A>

NEW QUESTION 40

Which VMware offering will allow an administrator to manage the lifecycle of multiple vCenter Server instances in a single software as a service (SaaS)-based solution to help drive operational efficiency?

- A. VMware vSphere with Tanzu
- B. VMware Cloud Foundation
- C. VMware vSphere+
- D. VMware Aria Suite Lifecycle

Answer: C

Explanation:

VCF includes the management domain and multiple workload domains. While VCF does use LCM to manage vCenter lifecycle, it is on-prem only (for now) and is not SaaS based. That only leave vSphere+. See the video in this link about upgrading remote vCenters managed by vSphere+.
<https://www.vmware.com/products/vsphere/vsphere-plus.html>

NEW QUESTION 44

An administrator needs better performance and near-zero CPU utilization from the ESXi hosts for networking functions and processing. The administrator creates a new vSphere Distributed Switch and enables network offloads compatibility. Which solution would help achieve this goal?

- A. vSphere Distributed Services Engine
- B. Data Processing Units (DPUs)
- C. vSphere Network I/O Control
- D. Universal Passthrough version 2

Answer: B

Explanation:

The solution that would help achieve better performance and near-zero CPU utilization from the ESXi hosts for networking functions and processing is Data Processing Units (DPUs), which are specialized processors that offload network services from the CPU and provide hardware acceleration.
<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-networking/GUID-41AB1101-D943-490A-BF1A-E>

NEW QUESTION 48

An administrator remotely deploys VMware ESXi using an out of band management connection and now needs to complete the configuration of the management network so that the host is accessible through the vSphere Host Client.

The following information has been provided to complete the configuration:

- Host FQDN esxi01corp.local
- Management VLAN ID: 10 DHCP: No
- Management IP Address: 172.16.10.101/24
- Management IP Gateway: 172.16.10.1
- Corporate DNS Servers: 172.16.10.5, 172.16.10.6
- DNS Domain: corp.local

In addition, all host configurations must also meet the following requirements:

- The management network must use only IPv4 network protocols.
- The management network must be fault tolerant

Which four high level tasks should the administrator complete in the Direct Console User Interface (DCUI) in order to meet the requirements and successfully log into the vSphere Host Client? (Choose four.)

- A. Set the value of the VMware ESXi Management Network VLAN ID to 10
- B. Configure at least two network adapters for the VMware ESXi Management Network
- C. Update the VMware ESXi Management Network IPv4 configuration to use a static IPv4 address
- D. Create a DNS A Record for the VMware ESXi host on the corporate DNS servers
- E. Disable IPv6 for the VMware ESXi Management Network
- F. Restore the original Management vSphere Standard Switch.
- G. Update the VMware ESXi Management Network DNS configuration to use the corporate DNS servers for 'names resolution

Answer: ABCD

NEW QUESTION 49

An administrator is tasked with looking into the disaster recovery (DR) options for a software-defined data center (SDDC).

The following requirements must be met:

- All virtual machines (VMs) must be protected to a secondary site.
- The source VMs must remain online until the failover.
- When failing over to the secondary site, application downtime is allowed
- The DR failover must be managed from the vSphere Client.
- Costs must remain as low as possible.

How can the administrator accomplish this task?

- A. Configure VMware Cloud Disaster Recovery (VCDR) and combine it with array-based storage replication
- B. Configure VMware Site Recovery Manager and combine it with vSphere Replication.
- C. Configure a subscribed content library on the secondary site.
- D. Configure VMware Site Recovery Manager and combine it with array-based storage replication.

Answer: B

Explanation:

<https://blogs.vmware.com/virtualblocks/2017/11/29/vsr-technicaloverview/>

NEW QUESTION 50

An administrator is completing the configuration of a new vSphere cluster and has enabled vSphere High Availability (HA) and vSphere Distributed Resource Scheduler (DRS).

After adding the ESXi hosts to the cluster, which networking information will the administrator be prompted to provide when using the Cluster Quickstart workflow?

- A. vMotion networking
- B. Management networking
- C. vSAN networking
- D. Virtual machine networking

Answer: A

Explanation:

<https://core.vmware.com/resource/cluster-quickstart#section1>

NEW QUESTION 53

An administrator successfully installs VMware ESXi onto the first host of a new vSphere cluster but makes no additional configuration changes. When attempting to log into the vSphere Host Client using the Fully Qualified Domain Name (FQDN) of the host, the administrator receives the following error message:

“Server Not Found - We can't connect to the server at esxi101.corp.local? The following information has been provided to complete the configuration:

- Host FQDN esxi101.corp.local
- Management VLAN ID: 10
- DHCP: No
- Management IP Address: 172.16 10.101 / 24
- Management IP Gateway: 172.16.10.1
- Corporate DNS Servers: 172.16 10.5, 172.16.10.6
- DNS Domain: corp.local

In addition, all host configurations must also meet the following requirements:

- The management network must use only IPv4 network protocols.
- The management network must be fault tolerant

Which three high level tasks should the administrator complete, at a minimum, in order to successfully log into the vSphere Host Client using the FQDN for esxi101 and complete the configuration? (Choose three.)

- A. Ensure a DNS A Record is created for the VMware ESXi host on the corporate DNS servers.
- B. Update the VMware ESXi Management Network DNS configuration to use the corporate DNS servers for names resolution
- C. Update the VMware ESXi Management Network IPv4 configuration to use a static a IPv4 address
- D. Configure at least two network adapters for the VMware ESXi Management Network
- E. Set the value of the VMware ESXi Management Network VLAN ID to 10
- F. Disable IPv6 for the VMware ESXi Management Network

Answer: ACE

NEW QUESTION 55

What are two use cases for VMware vSphere+? (Choose two.)

- A. Enhance on-premises workloads by managing them through the VMware Cloud Console
- B. Allow live migration between on-premises and VMware Cloud
- C. Increase the performance of the native vCenter vMotion capability
- D. Allow the creation of affinity and anti-affinity rules to be used during failover events
- E. Simplify vCenter lifecycle management through cloud-enabled automation

Answer: AE

Explanation:

<https://www.vmware.com/products/vsphere/vsphere-plus.html> <https://blogs.vmware.com/vsphere/2022/06/vmware-vsphereplus-introducing-the-multi-cloud-workload-platform>

NEW QUESTION 56

An administrator plans to bring VMware vCenter offline in order to perform hardware maintenance on the host where the vCenter Server Appliance is running. Which vSphere feature must be configured to ensure that vCenter users experience minimal downtime?

- A. vSphere Distributed Resource Scheduler
- B. Hybrid Linked Mode
- C. vCenter Server High Availability
- D. Enhanced Linked Mode

Answer: C

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.avail.doc/GUID-4A626993-A829-495>

NEW QUESTION 60

An administrator is planning to upgrade a VMware vCenter instance to version 8. It is currently integrated with the following solutions:

- * VMware Aria Automation
- * VMware Cloud Director

Which tool can the administrator use to run Interoperability reports before the upgrade process?

- A. sphere Update Manager
- B. VMware Aria Suite Lifecycle
- C. vCenter Server Update Planner
- D. vSphere Lifecycle Manager

Answer: C

Explanation:

The tool that can be used to run interoperability reports before upgrading a vCenter Server instance is vCenter Server Update Planner, which allows checking compatibility with other VMware products.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.upgrade.doc/GUID-C3FFBF62-D6BF>

NEW QUESTION 61

What is the minimum network throughput in Gb/s for vSAN using the Express Storage Architecture (ESA)?

- A. 50
- B. 25
- C. 1
- D. 10

Answer: D

Explanation:

<https://core.vmware.com/resource/vmware-vsan-design-guide#:~:text=Summary%20of%20Network%20Design>

NEW QUESTION 62

After a number of outages within a production VMware software-defined data center, an administrator is tasked with identifying a solution to meet the following requirements:

- Reduce the risk of outages by proactively identifying issues with the environment and resolving them.
- Reduce the complexity of uploading log bundles when raising support tickets.

Which solution should the administrator recommend to meet these requirements?

- A. VMware Aria Operations for Logs
- B. VMware Skyline Advisor Pro
- C. VMware Skyline Health
- D. VMware Aria Operations

Answer: B

Explanation:

Skyline Advisor Pro is a self-service web application that enables you to receive proactive intelligence with new insights, accelerated analysis, and simplified design, within a web browser. To activate Skyline Advisor Pro, upgrade your Skyline Collector to Skyline Collector 3.0 or later versions.

The solution that should be recommended to reduce the risk of outages by proactively identifying and resolving issues with the environment and reducing the complexity of uploading log bundles is VMware Skyline Health, which provides automated support and proactive recommendations for vSphere.

NEW QUESTION 66

An administrator wants to use tag-based placement rules on their virtual machine disks using VMware vCenter. Which option would allow the administrator to achieve this?

- A. Storage Policy Based Management
- B. Storage I/O Control
- C. vSphere Storage APIs for Storage Awareness (VASA)
- D. vSphere Distributed Resource Scheduler (DRS)

Answer: A

Explanation:

<https://vnote42.net/2020/01/15/vcenter-tag-based-vm-placement/>

NEW QUESTION 70

Which two datastore types store the components of a virtual machine as a set of objects? (Choose two.)

- A. VMware Virtual Machine File System (VMFS)
- B. VMware vSAN
- C. Network File System (NFS) 3
- D. vSphere Virtual Volumes (vVols)
- E. Network File System (NFS) 4.1


Answer: BD

Explanation:

Option B and D are correct because they are the datastore types that store the components of a virtual machine as a set of objects, which are logical containers that abstract physical storage resources. Option A, C and E are incorrect because they are the datastore types that store the components of a virtual machine as a set of files, which are stored on a file system that resides on a physical storage device. References: <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.storage.doc/GUID-9F9E3F8C-0E2B-4>

NEW QUESTION 74

Refer to the exhibit.

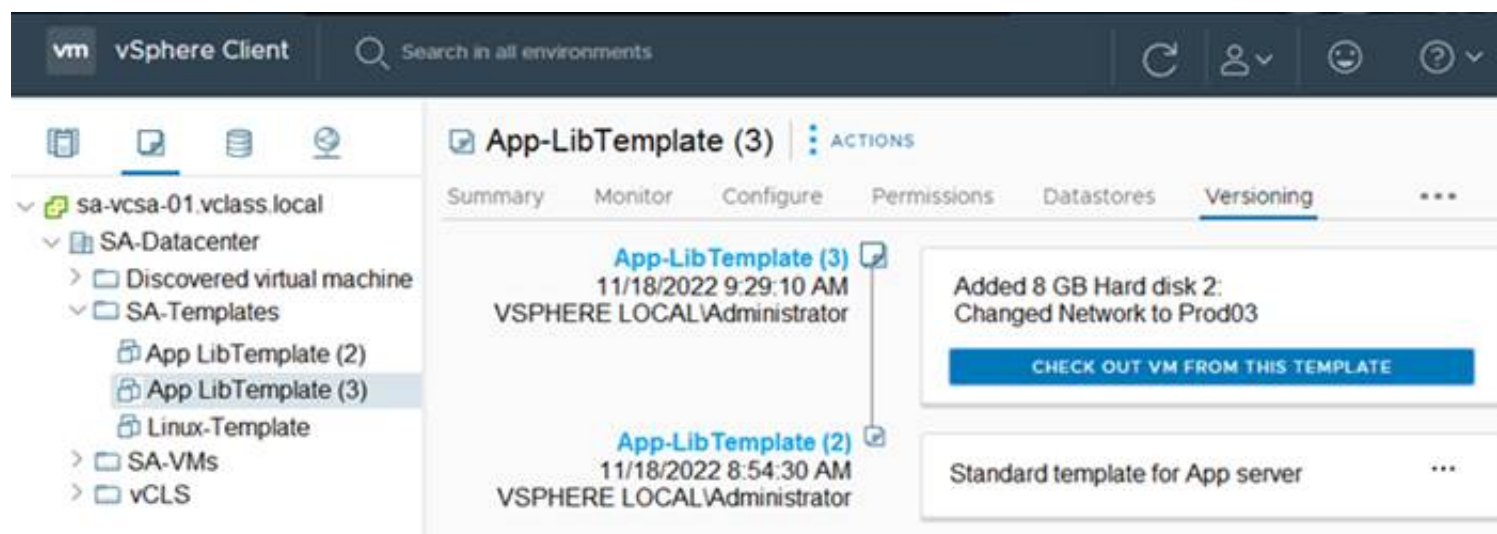

Given the configuration shown in the exhibit, what should the administrator do if the latest VM template contains changes that are no longer needed?

- A. Delete App-LibTemplate (2)
- B. Revert to App-LibTemplate (2)
- C. Delete App-LibTemplate (3)
- D. Check out App-LibTemplate (3)

Answer: B

Explanation:

Deleting App-LibTemplate (3) will remove the changes that are no longer needed and revert to the previous version of the template.

References:

https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm_admin.doc/GUID-9A5093A5-C54

https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm_admin.doc/GUID-D69B0279-CC9 If the latest VM template contains changes that are no longer needed, the administrator should revert to the previous version of the template1.

Here are the steps to revert to a previous version of a template1:

- > Navigate to the Versioning tab of the VM template.
- > From the vertical timeline, navigate to the previous state of the VM template.
- > Click the horizontal ellipsis icon (⋮), and select Revert to This Version.
- > The Revert to Version dialog box opens. Enter a reason for the revert operation and click Revert. So, in this case, the correct answer is: B. Revert to App-LibTemplate (2)

This will make App-LibTemplate (2) the current VM template1. Please note that this operation will not delete App-LibTemplate (3), it will simply make App-LibTemplate (2) the current version1.

NEW QUESTION 75

Which step is completed during Stage 1 of the vCenter Server Appliance deployment?

- A. Join a vCenter Single Sign-On domain
- B. Create a new vCenter Single Sign-On domain
- C. Select the deployment size
- D. Configure SSH access

Answer: C

Explanation:

The minimum network throughput in Gb/s for vSAN using the Express Storage Architecture (ESA) is 1 Gb/s, which is the minimum requirement for vSAN network adapters. However, VMware recommends using 10 Gb/s or higher for better performance and reliability. References:

<https://docs.vmware.com/en/VMware-vSphere/8.0/com.vmware.vsphere.vsan-planning.doc/GUID-9F1D4A3B>

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.install.doc/GUID-1E39EF05-1DD7-4E> <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.install.doc/GUID-1E39EF05-1DD7-4E>

NEW QUESTION 78

After a recent unexplained peak in virtual machine (VM) CPU usage, an administrator is asked to monitor the VM performance for a recurrence of the issue. Which two tools can the administrator use? (Choose two.)

- A. vCenter Management Interface
- B. Direct Console User Interface (DCUI)
- C. vSphere Performance Charts
- D. vCenter Command Line Interface
- E. ESXi Shell

Answer: CE

Explanation:

To monitor the VM performance for a recurrence of the issue, the administrator can use vSphere Performance Charts, which provide graphical views of various performance metrics for VMs and other objects; or ESXi Shell, which provides command-line access to ESXi hosts and allows running various commands to collect performance data.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.monitoring.doc/GUID-D89E8267-C74> <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.monitoring.doc/GUID-CDC20FD2-FE>

NEW QUESTION 81

Which four elements can a vSphere Lifecycle Manager image contain? (Choose four.)

- A. ESXi base image
- B. ESXi configuration
- C. Vendor agents
- D. Vendor add-ons
- E. BIOS updates
- F. Firmware and drivers add-on
- G. Independent components

Answer: ADFG

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-lifecycle-manager/GUID-9A20C2DA-F45F-4C9B-9> A vSphere Lifecycle Manager image can consist of the following four elements:

ESXi base image

The base image contains an image of VMware ESXi Server and additional components, such as drivers and adapters that are necessary to boot a server. The base image is the only mandatory element in a vSphere Lifecycle Manager image. All other elements are optional.

Vendor add-on

The vendor add-on is a collection of software components that OEMs create and distribute. The vendor add-on can contain drivers, patches, and solutions.

Firmware and drivers add-on

The firmware and drivers add-on is a special type of vendor add-on designed to assist in the firmware update process. The firmware and drivers add-on contains firmware for a specific server type and corresponding drivers. To add a firmware and drivers add-on to your image, you must install the hardware support manager plug-in provided by the hardware vendor for the hosts in the respective cluster.

Independent components

The component is the smallest discrete unit in an image. The independent components that you add to an image contain third-party software, for example drivers or adapters.

NEW QUESTION 84

A combination of which two components of the software-defined data center (SDDC) are responsible for the initial abstraction of CPU, memory, disk, and network resources and their subsequent management? (Choose two.)

- A. VMware ESXi
- B. VMware vCenter Cloud Gateway
- C. VMware vSphere Lifecycle
- D. VMware vCenter
- E. VMware vSphere Operations

Answer: AD

Explanation:

VMware ESXi and VMware vCenter are the two components of the software-defined data center (SDDC) that are responsible for the initial abstraction of CPU, memory, disk, and network resources and their subsequent management¹. VMware ESXi is the virtualization platform where you create and run virtual machines and virtual appliances². VMware vCenter is the service through which you manage multiple hosts connected in a network and pool host resources². These two components are part of the SDDC architecture that enables a fully automated, zero-downtime infrastructure for any application, and any hardware, now and in the future³.

NEW QUESTION 87

An administrator has a requirement to revert a running virtual machine to a previous snapshot after a failed attempt to upgrade an application. When the administrator originally took the snapshot the following choices in the Take Snapshot dialog were made:

- Snapshot the virtual machine's memory = false
- Quiesce guest file system = false

What will be the result of the administrator selecting the 'Revert to Latest Snapshot?' option to return the virtual machine to a previous snapshot?

- A. The virtual machine will be restored to the parent snapshot in a powered on state
- B. The virtual machine will be restored to the parent snapshot in a powered off state.
- C. The virtual machine will be restored to the child snapshot in a powered off state
- D. The virtual machine will be restored to the child snapshot in a powered on state.

Answer: B

Explanation:

Powered on (does not include memory) Reverts to the parent snapshot and the virtual machine is powered off. Powered off (does not include memory) Reverts to the parent snapshot and the virtual machine is powered off. <https://docs.vmware.com/en/VMware-vSphere/8.0/vsphere-vm-administration/GUID-50BD0E64-75A6-4164-B>

NEW QUESTION 92

An administrator runs a two-node vSphere cluster, which contains two domain controller virtual machines (VMs). The administrator wants to ensure that VMs run on separate hosts without interfering with normal maintenance operations.

How should the administrator configure Distributed Resource Scheduler (DRS)?

- A. Create a 'Must run Virtual Machines to Hosts' anti-affinity rule.
- B. Create a 'Virtual Machines to Virtual Machines' anti-affinity rule.
- C. Create a 'Virtual Machines to Virtual Machines' dependency rule.
- D. Create a 'Should run Virtual Machines to Hosts' anti-affinity rule.

Answer: D

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.resmgmt.doc/GUID-793013E2-0976-4>

NEW QUESTION 93

An administrator receives reports from the application team of poor performance of a virtual machine (VM). The administrator reviews the virtual machine and discovers that it has 20 snapshots that are over 12 months old. What could the administrator do to improve the VM's performance?

- A. Inflate the base disk to make space for future snapshots.
- B. Revert to the latest snapshot.
- C. Consolidate all of the snapshots into the base VM.
- D. Identify and delete the largest delta .vmdk file.


Answer: C

Explanation:

<https://4sysops.com/archives/performance-impact-of-snapshots-in-vmware-vsphere-7/#:~:text=As%20you%20k>

NEW QUESTION 94

Exhibit switch

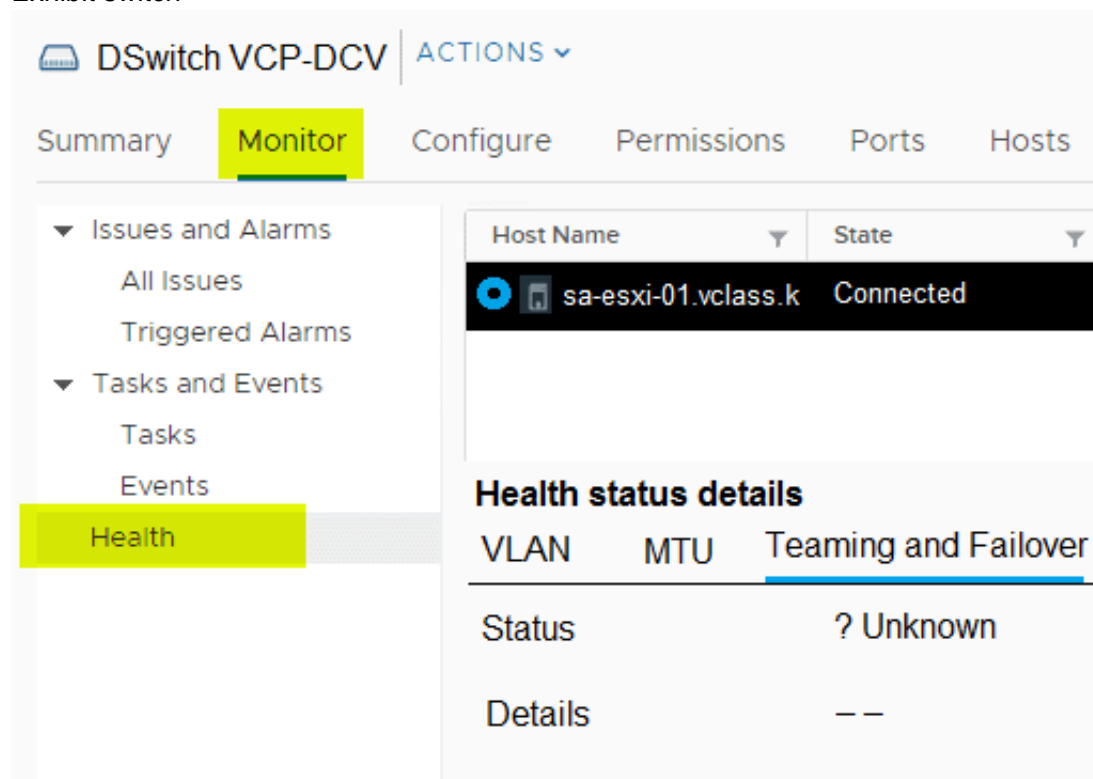

Host Name	State
sa-esxi-01.vclass.k	Connected

VLAN	MTU	Teaming and Failover
Status		? Unknown
Details		--

An administrator configures a distributed switch and adds the first VMware ESXi server to it. The administrator also performs the following activities:

- The administrator assigns two uplinks to the distributed switch.
- The administrator enables uplink teaming.

When attempting to perform a health check of the teaming policy, the health status of the Teaming and Failover reports as 'Unknown?', as seen in the exhibit.

What can the administrator change in the distributed switch for the health status to report correctly?

- A. Add a minimum of three hosts with two uplinks each
- B. Add a minimum of two hosts with two uplinks each
- C. Add a minimum of three hosts with four uplinks each
- D. Add a minimum of two hosts with one uplink each

Answer: B

NEW QUESTION 96

An administrator notices a performance issue in VMware vCenter. To try and understand more about the performance issue, the administrator needs to gather more information about the vCenter database to eliminate a potential disk space issue. Which two tools can the administrator use? (Choose two.)

- A. vCenter Management Interface (VAMI)
- B. Perfmon
- C. df
- D. esxtop
- E. vSphere Client

Answer: AC

Explanation:

<https://kb.vmware.com/s/article/76563>

NEW QUESTION 99

An administrator is asked to segregate virtual machine (VM) traffic by VLAN on a vSphere standard switch. The following requirements must be met:

- VLAN ID on the switch port group must be 4095.
- VLAN tagging must be done at the VM level. Which tagging mode is required?

- A. External Switch Tagging (EST)
- B. None
- C. Virtual Guest Tagging (VGT)
- D. Virtual Switch Tagging (VST)

Answer: C

Explanation:

The tagging mode that is required is Virtual Guest Tagging (VGT), which allows VLAN tagging to be done at the VM level. VGT requires that the VLAN ID on the switch port group be set to 4095, which is a special value that indicates that packets from all VLANs are allowed to pass through. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.networking.doc/GUID-D35A0A1C-B6>

<https://kb.vmware.com/s/article/1003806>

NEW QUESTION 102

An administrator is deploying a new all flash vSAN cluster based on the vSAN Original Storage Architecture (OSA).

What is the minimum supported network throughput in Gb/s for each host?

- A. 50
- B. 10
- C. 25
- D. 1

Answer: B

Explanation:

The minimum supported network throughput in Gb/s for each host in an all flash vSAN cluster based on the vSAN Original Storage Architecture (OSA) is 10.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vsan-planning.doc/GUID-FCEA0CDD>

vSAN Express Storage Architecture (ESA) are only supported with 25Gbps and higher connection speeds.

ESA ReadyNodes configured for vSAN ESA will be configured with 25/50/100Gbps NICs. vSAN OSA

all-flash configurations are only supported with a 10Gb or higher connections. One reason for this is that the improved performance with an all-flash configuration

may consume more network bandwidth between the hosts to gain higher throughput. <https://core.vmware.com/resource/vmware-vsan-design-guide#sec6815-sub3>

NEW QUESTION 107

Which three vSphere features are still supported for Windows-based virtual machines when enabling vSphere's -virtualization-based security feature? (Choose three.)

- A. vSphere vMotion
- B. PCI passthrough
- C. vSphere High Availability (HA) D, vSphere Fault Tolerance
- D. vSphere Distributed Resources Scheduler (DRS)
- E. Hot Add of CPU or memory

Answer: ACE

Explanation:

Option A, C and E are correct because they indicate that vSphere features such as vMotion, High Availability (HA) and Distributed Resource Scheduler (DRS) are still supported for Windows-based virtual machines when enabling vSphere's virtualization-based security feature, which provides enhanced protection for guest operating systems and applications against various attacks. Option B is incorrect because PCI passthrough is not supported for Windows-based virtual machines when enabling vSphere's virtualization-based security feature, as this feature requires direct access to physical devices that cannot be shared or protected by hypervisor mechanisms. Option D is incorrect because Fault Tolerance is not supported for Windows-based virtual machines when enabling vSphere's virtualization-based security feature, as this feature requires identical execution states for primary and secondary virtual machines that cannot be guaranteed by hypervisor mechanisms. Option F is incorrect because Hot Add of CPU or memory is not supported for Windows-based virtual machines when enabling vSphere's virtualization-based security feature, as this feature requires

dynamic changes to virtual hardware configuration that cannot be handled by hypervisor mechanisms. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.security.doc/GUID-A2A4371A-B888>

NEW QUESTION 108

An administrator is tasked with looking into the disaster recovery options for protecting a database server using VMware vSphere Replication.

The following requirements must be met:

- The virtual machine must remain online during the protection.
- The virtual machine's snapshots must be used as part of the replication process. Which step must the administrator complete to accomplish this task?

- A. Configure the virtual machine storage policy.
- B. Enable guest OS VSS quiescing for this virtual machine.
- C. Perform a full initial synchronization of the source virtual machine to the target location.
- D. Configure network traffic isolation for vSphere Replication.

Answer: C

Explanation:

<https://docs.vmware.com/en/vSphere-Replication/8.7/com.vmware.vsphere.replication-admin.doc/GUID-C2493>

NEW QUESTION 113

An administrator manages VM templates and ISO images for a remote office. Their main requirements are to store these templates in a single repository and manage different versions of the templates.

What solution should the administrator deploy to meet these requirements?

- A. A subscribed content library
- B. A local content library
- C. A vSAN datastore
- D. A shared VMFS datastore

Answer: B

Explanation:

<https://4sysops.com/archives/how-to-create-a-vmware-content-library/#:~:text=A%20VMware%20content%20l>

NEW QUESTION 118

An administrator is adding a new ESXi host to an existing vSphere cluster. When selecting the cluster, the administrator is unable to use the Cluster Quickstart workflow to add and configure the additional host. What could be the root cause of this issue?

- A. The administrator has previously dismissed the Cluster Quickstart workflow.
- B. The administrator must manually add the host to the cluster before using the Cluster Quickstart workflow.
- C. The administrator has not been assigned the required permissions to use the Cluster Quickstart workflow.
- D. The administrator must enable the Cluster Quickstart workflow option in VMware vCenter.

Answer: A

Explanation:

Option A is correct because it indicates that the administrator has previously dismissed the Cluster Quickstart workflow, which will prevent them from using it to add and configure an additional host. To use the Cluster Quickstart workflow again, the administrator must enable it in the cluster settings. Option B is incorrect because the administrator does not need to manually add the host to the cluster before using the Cluster Quickstart workflow, as this is one of the steps in the workflow. Option C is incorrect because the administrator does not need any special permissions to use the Cluster Quickstart workflow, as long as they have permissions to perform cluster operations. Option D is incorrect because there is no option to enable the Cluster Quickstart workflow in VMware vCenter, as this is a feature of vSphere clusters. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vcenterhost.doc/GUID-9F9E3F8C-0E2>

NEW QUESTION 120

Which three features are only available when using vSphere Distributed Switches instead of vSphere Standard Switches? (Choose three.)

- A. 802.1Q tagging
- B. Port mirroring
- C. Netflow
- D. Configuration backup and restore
- E. IPv6 support
- F. IPv4 support

Answer: BCD

Explanation:


Three features that are only available when using vSphere Distributed Switches instead of vSphere Standard Switches are port mirroring, which allows monitoring network traffic on a virtual switch port; Netflow, which allows collecting IP traffic information from a virtual switch; and configuration backup and restore, which allows saving and restoring distributed switch settings.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.networking.doc/GUID-D5960C77-0D1> <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.networking.doc/GUID-A59628EA-985> <https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.networking.doc/GUID-E9EB9D18-692>

NEW QUESTION 124

Refer to the exhibit.

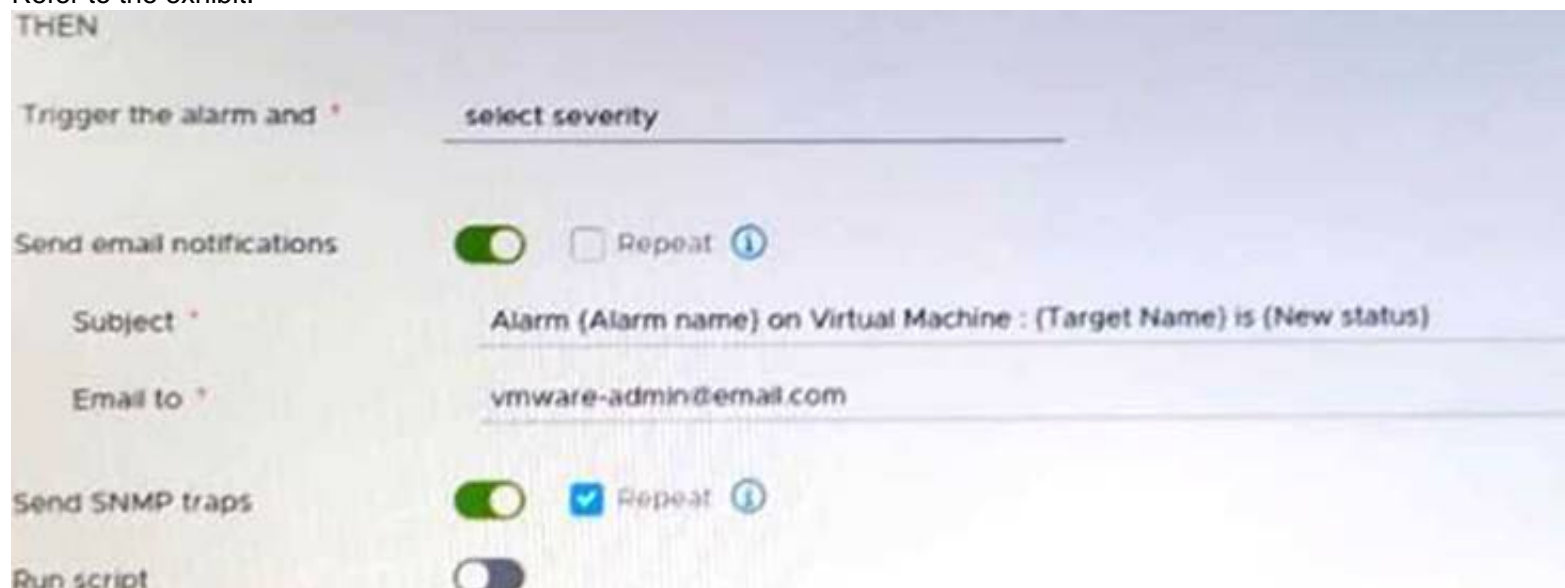

After updating a predefined alarm on VMware vCenter, an administrator enables email notifications as shown in the attached alarm; however, notifications are NOT being sent.

Where must the mail server settings be configured by the administrator to resolve this issue?

- A. In the ESXi host system config
- B. In the alarm rule definitions
- C. In the vCenter settings in the vSphere Client
- D. In the vCenter Management Interface

Answer: C

Explanation:

Option C is correct because it allows the administrator to configure the mail server settings in the vCenter settings in the vSphere Client, which are required for sending email notifications for alarms. Option A is incorrect because it configures the mail server settings on an ESXi host system, which are not used for sending email notifications for alarms. Option B is incorrect because it configures the alarm rule definitions, which are already enabled in the exhibit. Option D is incorrect

because it configures the vCenter Management Interface, which is not used for sending email notifications for alarms. References:
<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.monitoring.doc/GUID-A2A4371A-B88>

NEW QUESTION 128

What are two uses cases for VMware Tools? (Choose two.)

- A. Time synchronization with an NTP server
- B. Direct deployment of the Aria Automation Config minion
- C. Share folders between ESXi hosts and guest OS file systems
- D. Ability to shut down a virtual machine remotely
- E. Support for unsupported network device drivers

Answer: CD

Explanation:


<https://www.stevenbright.com/2022/03/deploy-salt-minions-automatically-using-vmware-tools/>

Two use cases for VMware Tools are direct deployment of the Aria Automation Config minion and ability to shut down a virtual machine remotely. Direct deployment of the Aria Automation Config minion is a feature that allows the administrator to deploy a configuration management agent to a virtual machine using VMware Tools. This feature enables automation and orchestration of virtual machine configuration tasks. Ability to shut down a virtual machine remotely is a feature that allows the administrator to gracefully power off a virtual machine from the vSphere Client or other VMware products. This feature requires VMware Tools to be installed and running on the guest operating system. References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vmwaretools.doc/GUID-28C39A00-74>

NEW QUESTION 132

Refer to the exhibit.

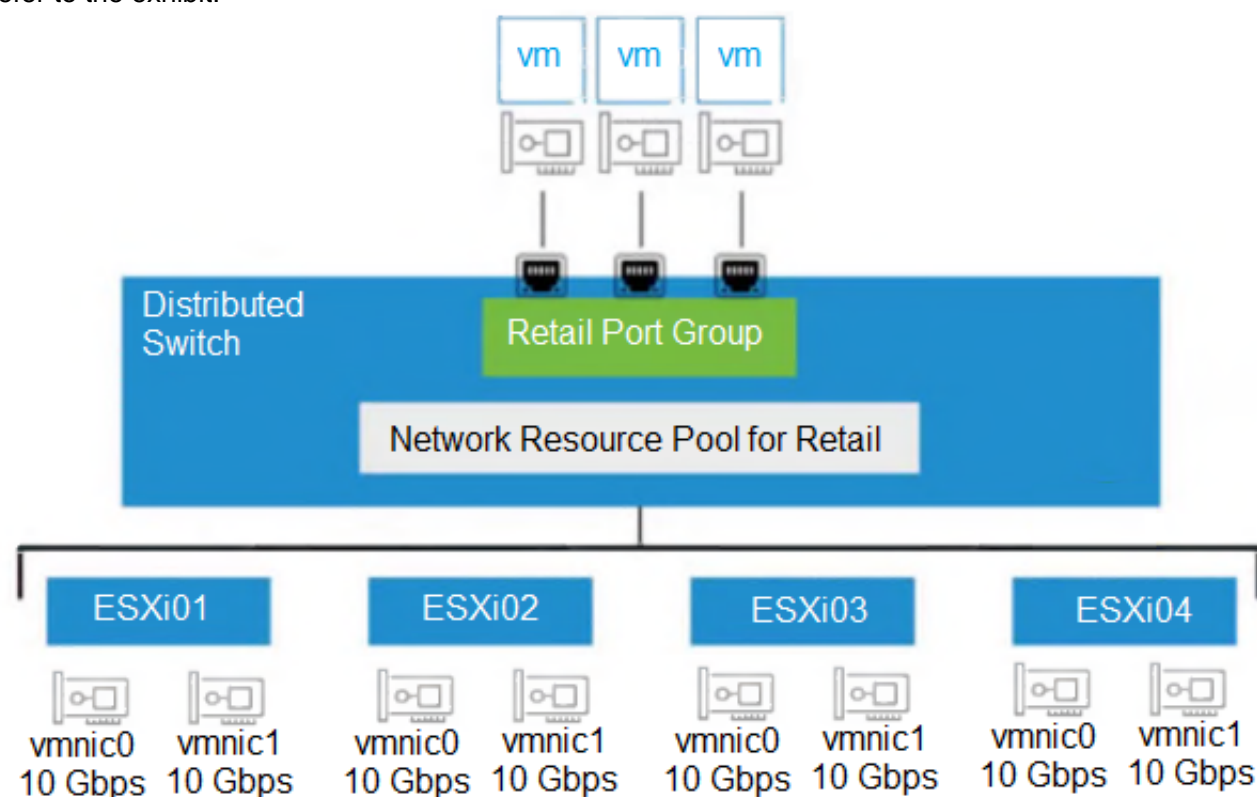

An administrator set up the following configuration:

- The distributed switch has four ESXi hosts, and each host has two 10 Gbps NICs.
- In the Network I/O Control configuration, the amount of bandwidth reserved for virtual machine (VM) traffic is 4 Gbps.

The administrator wants to guarantee that VMs in the Retail distributed port group can access 50 percent of the available reserved bandwidth for VM traffic. Given this scenario, what should the size (in Gbps) of the Retail network resource pool be?

- A. 40
- B. 32
- C. 8
- D. 16

Answer: D

Explanation:

$4\text{Gbps} \times 8\text{Nic} = 32\text{Gbps} \times 50\% = 16\text{Gbps}$

NEW QUESTION 135

An administrator is asked to configure a security policy at the port group level of a standard switch. The following requirements must be met:

- The security policy must apply to all virtual machines on portgroup-1.
- All traffic must be forwarded, regardless of the destination.

- A. Forged transmits set to reject
- B. MAC address changes set to accept
- C. Promiscuous mode set to reject
- D. Promiscuous mode set to accept

Answer: D

Explanation:

The security policy that must be configured at the port group level to allow all traffic to be forwarded regardless of the destination is promiscuous mode set to accept, which allows receiving all traffic on a virtual switch port.

References:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.networking.doc/GUID-D5960C77-0D1>

NEW QUESTION 139

An administrator wants to create virtual machine (VM) templates and store them in a content library. The administrator would like to use the content library to manage different versions of these templates so that reverting to an earlier version is an option.

How should the administrator create these templates?

- A. Select a VM in the vCenter inventory.Clone the VM to the content library as a VM template type.
- B. Select a VM template in the vCenter inventor
- C. Clone the template to the content library.
- D. Export a VM in the vCenter inventory to an OVF templat
- E. Import the OVF template into the content library.
- F. Convert a VM to a template in the vCenter inventory.Clone the template to the content library.

Answer: A

Explanation:

Option A is correct because it allows the administrator to clone a VM to the content library as a VM template type, which can be used to create and manage different versions of these templates in the content library. Option B is incorrect because it requires the administrator to convert a VM to a template in the vCenter inventory first, which is an extra step. Option C is incorrect because it requires the administrator to export a VM to an OVF template and import it into the content library, which are extra steps. Option D is incorrect because it requires the administrator to convert a VM to a template in the vCenter inventory and clone it to the content library, which are extra steps. References:

https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vm_admin.doc/GUID-9F9E3F8C-0E2

NEW QUESTION 143

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questons and Answers in PDF Format

3V0-21.23 Practice Exam Features:

- * 3V0-21.23 Questions and Answers Updated Frequently
- * 3V0-21.23 Practice Questions Verified by Expert Senior Certified Staff
- * 3V0-21.23 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 3V0-21.23 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 3V0-21.23 Practice Test Here](#)