



Juniper

Exam Questions JN0-363

Service Provider Routing and Switching Specialist (JNCIS-SP)

About ExamBible

[Your Partner of IT Exam](#)

Found in 1998

ExamBible is a company specialized on providing high quality IT exam practice study materials, especially Cisco CCNA, CCDA, CCNP, CCIE, Checkpoint CCSE, CompTIA A+, Network+ certification practice exams and so on. We guarantee that the candidates will not only pass any IT exam at the first attempt but also get profound understanding about the certificates they have got. There are so many alike companies in this industry, however, ExamBible has its unique advantages that other companies could not achieve.

Our Advances

* 99.9% Uptime

All examinations will be up to date.

* 24/7 Quality Support

We will provide service round the clock.

* 100% Pass Rate

Our guarantee that you will pass the exam.

* Unique Gurantee

If you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

NEW QUESTION 1


What are two types of SIDs used in segment touting? (Choose two.)

- A. node
- B. adjacency
- C. link
- D. interface

Answer: AB

NEW QUESTION 2

Exhibit

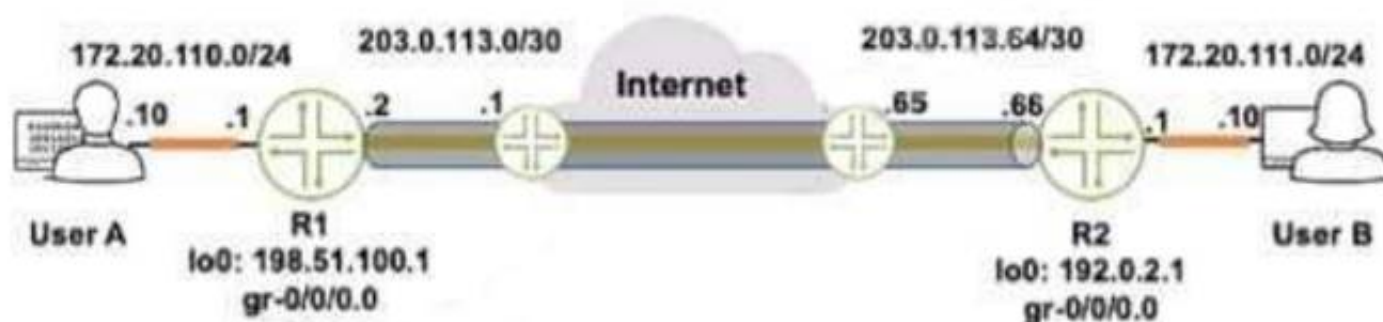

Referring to the exhibit, how do you verify the status of the tunnel from R1?

- A. Issue the ping 172.20.111.10 source 172.20.110.1 command.
- B. Issue the ping 172.20.111.10 source 198.51.100.1 command.
- C. Issue the ping 172.20.111.10 source 203.0.113.2 command.
- D. Issue the ping 172.20.111.10 source 192.0.2.1 command.
- E. Issue the ping 172.20.111.10 source 198.51.100.1 command.

Answer: C

NEW QUESTION 3

How does a Junos device learn about MAC addresses when it is first connected to an Ethernet LAN?

- A. The device sends out a network broadcast message asking for all devices and MAC addresses on the network and stores this information in addition to the interface from which the response was received.
- B. The device learns the destination MAC addresses from traffic in the network and stores this MAC address in addition to the interface from which the traffic was received.
- C. The device learns the source MAC addresses from traffic in the network and stores this MAC address in addition to the interface from which the traffic was received.
- D. The device sends out a network multicast message asking for all devices and MAC addresses on the network and stores this information in addition to the interface from which the response was received.

Answer: D

NEW QUESTION 4

Which two statements are correct about the way that BGP propagates routes by default? (Choose two.)

- A. A route learned by EBGP will be re-advertised to IBGP peers.
- B. A route learned by IBGP will not be re-advertised to IBGP peers.
- C. A route learned by EBGP will not be re-advertised to IBGP peers.
- D. A route learned by IBGP will be re-advertised to IBGP peers.

Answer: CD

NEW QUESTION 5

Which LSA type does an OSPF ABR use to advertise external routes generated by an NSSA ABR into the backbone?

- A. Type 5
- B. Type 7
- C. Type 3
- D. Type 1

Answer: C

NEW QUESTION 6

Exhibit


S Exhibit

LSI1 A AS 65501 ISPB AS 65502

Advertised Prefixes: 172.20.0.0/24 172.20.20.0/24 172.20.21.0/24

\ N

Advertised Prefixes: 172.20.0.0/24 172.20.1.0/24

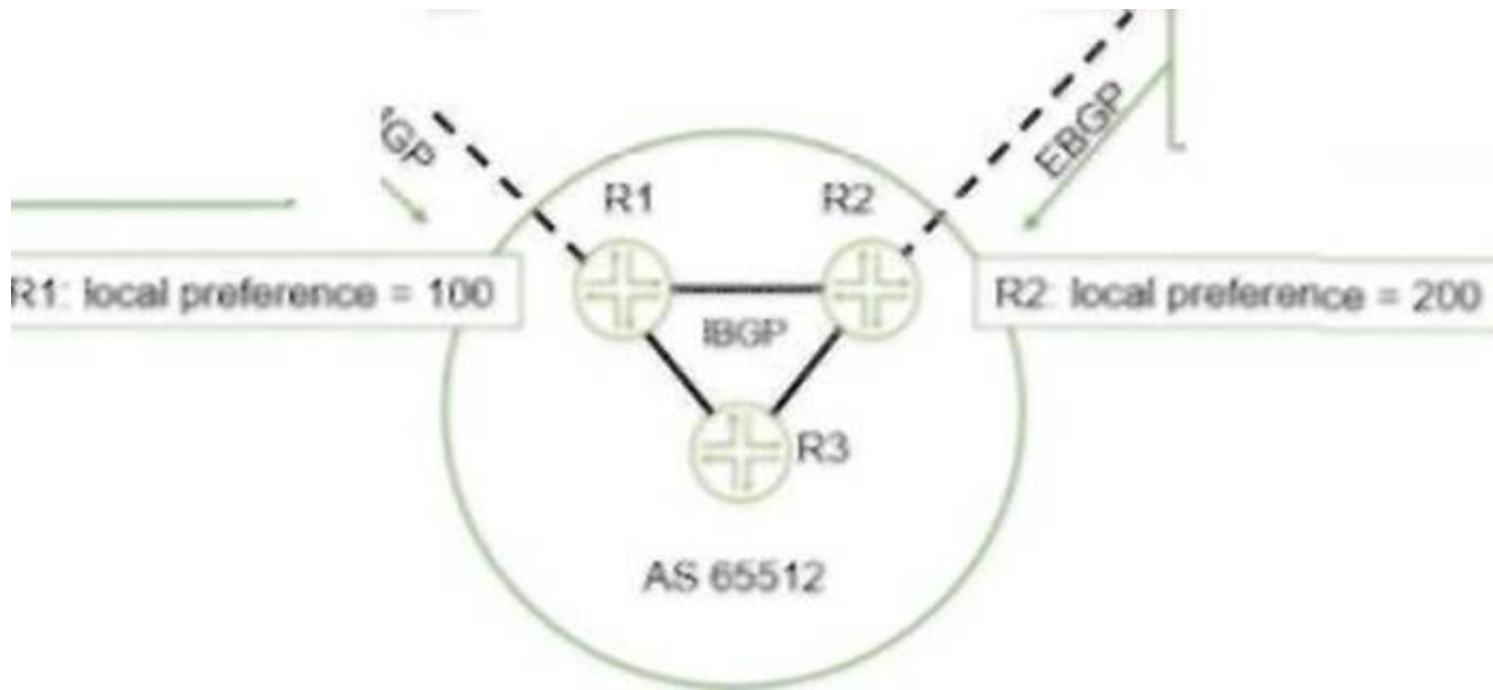


Referring to the exhibit, which two statements are correct? (Choose two.)

- A. Devices in AS 65512 will prefer ISP A for traffic destined to the 172.20.21.0/24 network.
- B. Devices In AS 65512 will prefer ISP A for traffic destined to the 172.20.0.0/24 network.
- C. Devices in AS 65512 will prefer ISP B for traffic destined to the 172.20.21.0/24 network.
- D. Devices In AS 65512 will prefer ISP B for traffic destined to the 172.20.0.0/24 network.

Answer: C

NEW QUESTION 7

Exhibit

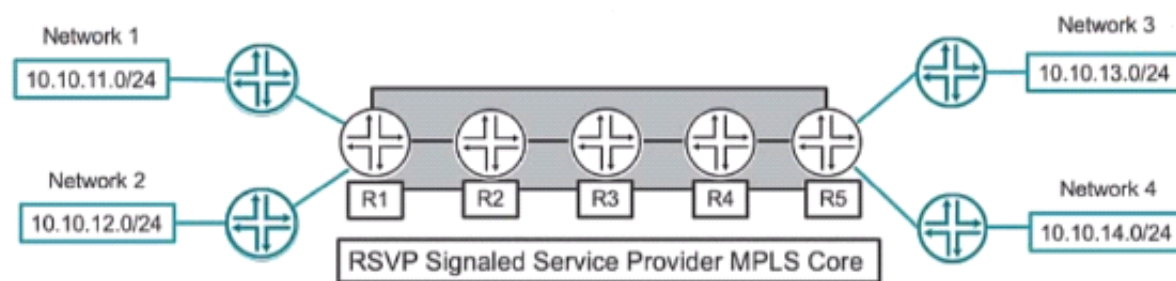

Referring to the exhibit, what is the minimum number of LSPs required to support all four networks?

- A. 1
- B. 2
- C. 8
- D. 4

Answer: C

NEW QUESTION 8


You are bringing a new network online with three MX Series devices enabled for STP. No root bridge priority has been configured. Which statement is true in this scenario?

- A. The device with the lowest MAC address will be elected as the root bridge.
- B. The device with the highest MAC address will be elected as the root bridge.
- C. The device with the lowest numerical lo0 IP address will be elected as the root bridge.
- D. The device with the highest numerical lo0 IP address will be elected as The bridge.

Answer: A

NEW QUESTION 9

Exhibit

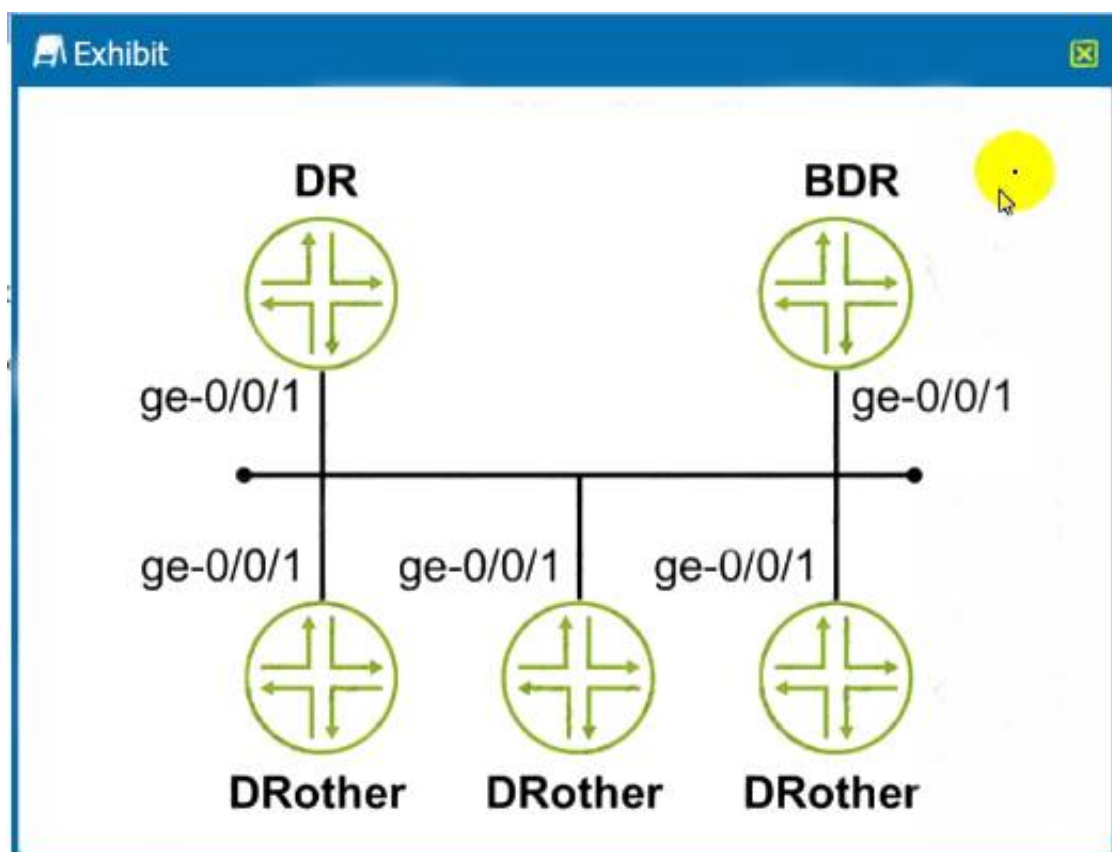

You are asked to configure the OSPF environment to prevent the DRothes routers from participating in DR/BDR election. Referring to the exhibit, which command will accomplish this task?

- A. set protocols ospf area 0.0.0.0 interface ge-0/0/1 priority 255
- B. set protocols ospf area 0.0.0.0 interface ge-0/0/1 priority 0
- C. set protocols ospf area 0.0.0.0 interface ge-0/0/1 interface-type nbma
- D. set protocols ospf area 0.0.0.0 interface ge-0/0/1 interface-type p2p

Answer: A

NEW QUESTION 10

Which two statements are correct about the community BGP attribute on a Junos device? (Choose two.)

- A. The community attribute is a mandatory BGP attribute.
- B. If the community attribute is present, it is ignored and deleted in the BGP updates.
- C. If the community attribute is present, it should be passed unchanged in the BGP updates.
- D. The community attribute is an optional BGP attribute.

Answer: AC

NEW QUESTION 10


Which statement is correct about IS-IS?

- A. IS-IS is a distance vector routing protocol.
- B. IS-IS is a path vector routing protocol.
- C. IS-IS is a link-state routing protocol.
- D. IS-IS is a classful routing protocol.

Answer: C

NEW QUESTION 11

Exhibit

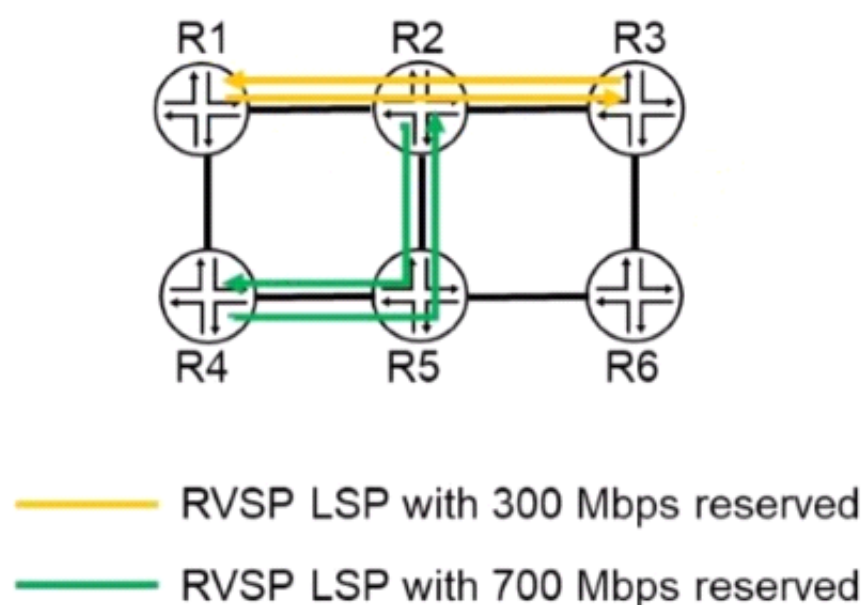


The exhibit shows a topology with 1 Gbps interfaces between routers, and four RSVP LSPs operating with the respective bandwidth reservations. Which path will be selected for a new LSP from R4 to R6 with a bandwidth reservation of 400 Mbps?

- A. R4 -> R1 -> R2 -> R5 -> R6
- B. R4 -> R5 -> R6
- C. R4 -> R5 -> R2 -> R3 -> R6
- D. R4 -> R1 -> R2 -> R3 -> R6

Answer: A

NEW QUESTION 15

Exhibit.

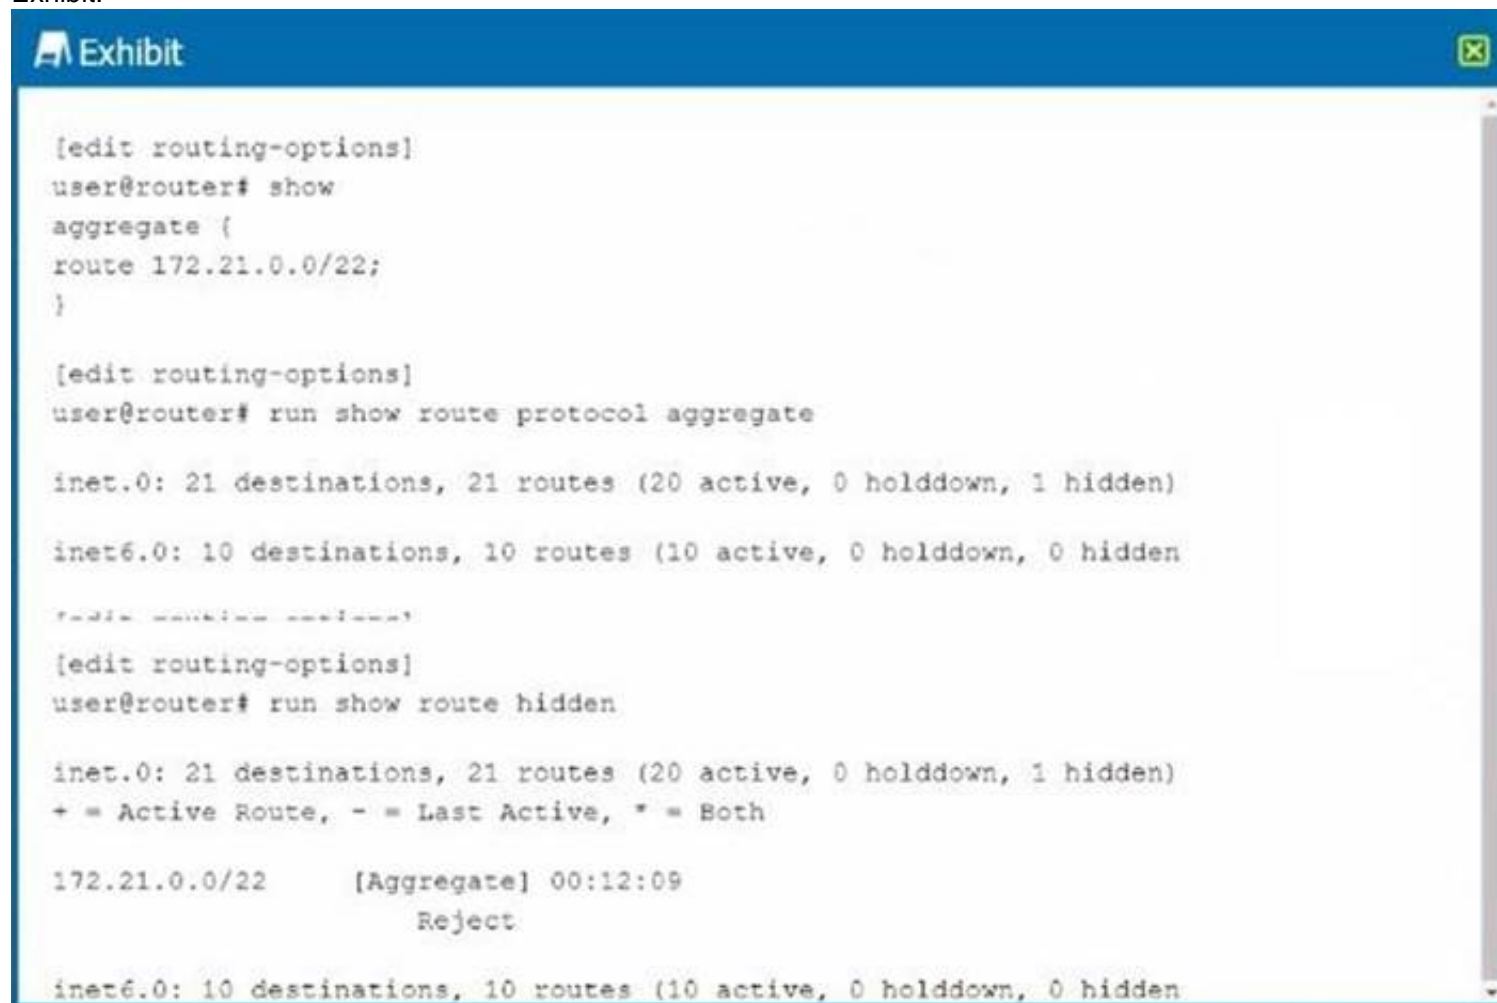

```
[edit routing-options]
user@router# show
aggregate {
  route 172.21.0.0/22;
}

[edit routing-options]
user@router# run show route protocol aggregate

inet.0: 21 destinations, 21 routes (20 active, 0 holddown, 1 hidden)
inet6.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)

[edit routing-options]
user@router# run show route hidden

inet.0: 21 destinations, 21 routes (20 active, 0 holddown, 1 hidden)
+ = Active Route, - = Last Active, * = Both

172.21.0.0/22      [Aggregate] 00:12:09
                  Reject

inet6.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
```

Referring to the exhibit, you have configured an aggregate route that represents the 172.21.0.0/24, 172.21.1.0/24, and 172.21.2.0/24 networks. However, when you view the routing table, your new route is hidden.

Which action would you perform to determine the problem?

- A. Verify that you have active contributing routes on the device.
- B. Verify that you have configured a policy on the device to accept aggregate routes.
- C. Verify that you have defined a metric value for the aggregate route.
- D. Verify that you have set the preference to a lower default value.

Answer: D

NEW QUESTION 20

Exhibit

```
user@router-re0> show system s?
Possible completions:
  services      Show service applications information
  snapshot      Show snapshot information
  software      Show loaded JUNOS extensions
  statistics    Show statistics for protocol
  storage       Show local storage data
```

You have configured graceful RE switchover (GRES), however you cannot complete the show system switchover command. Referring to the exhibit, what is the problem?

- A. The command is only available if non-stop routing is enabled.
- B. The command is only available on the backup Routing Engine.
- C. The command is only available if a backup router is configured.
- D. The command is only available if graceful restart is enabled.

Answer: B

NEW QUESTION 22

Which two statements are correct about IS-IS? (Choose two.)

- A. A level 1 only router can never form an adjacency with a level 2 only router.
- B. For level 2 adjacencies, the area IDs can be different.
- C. For level 2 adjacencies, the area IDs must be the same.
- D. A level 1 only router can form an adjacency with a level 2 only router.

Answer: CD

NEW QUESTION 25

Which two interface types are used as tunnel endpoints? (Choose two.)

- A. ae
- B. ip
- C. ge
- D. gr

Answer: BC

NEW QUESTION 30

You are bringing a new network online with three IS-IS routers using default Junos election priorities. The routers are configured as Level 2 only IS-IS routers. Which statement is true about the DIS election in this scenario?

- A. The router with the highest MAC address will be elected as the DIS.
- B. The router with the highest numerical lo0 IP address will be elected as the DIS.
- C. The router with the lowest numerical lo0 IP address will be elected as the DIS.
- D. The router with the lowest MAC address will be elected as the DIS.

Answer: B

NEW QUESTION 31

You are asked to create connections between routing instances on the same Junos device and route between the connected Instances. What are two ways to accomplish this task? (Choose two.)

- A. Use physical interfaces.
- B. Use an IRB interface.
- C. Use logical tunnel interfaces.
- D. Use loopback interfaces.

Answer: AB

NEW QUESTION 32

You are deploying link aggregation groups.

- A. By default, what are two considerations in this scenario? (Choose two.)
- B. There should only be four member links per LAG.
- C. All the ports must have the same speed.
- D. Member links are required to be contiguous ports.
- E. Member links can reside on different members within an MC-LAG.

Answer: BD

NEW QUESTION 35

.....

Relate Links

100% Pass Your JN0-363 Exam with ExamBible Prep Materials

<https://www.exambible.com/JN0-363-exam/>

Contact us

We are proud of our high-quality customer service, which serves you around the clock 24/7.

Viste - <https://www.exambible.com/>