

# Cisco

## Exam Questions 300-430

Implementing Cisco Enterprise Wireless Networks (ENWLSI)



#### NEW QUESTION 1

Which three properties are used for client profiling of wireless clients? (Choose three.)

- A. HTTP user agent
- B. DHCP
- C. MAC OUI
- D. hostname
- E. OS version
- F. IP address

**Answer:** ABC

#### NEW QUESTION 2


What is the difference between PIM sparse mode and PIM dense mode?

- A. Sparse mode supports only one switc
- B. Dense mode supports multiswitch networks.
- C. Sparse mode flood
- D. Dense mode uses distribution trees.
- E. Sparse mode uses distribution tree
- F. Dense mode floods.
- G. Sparse mode supports multiswitch network
- H. Dense mode supports only one switch.

**Answer:** C

#### NEW QUESTION 3

Refer to the exhibit.

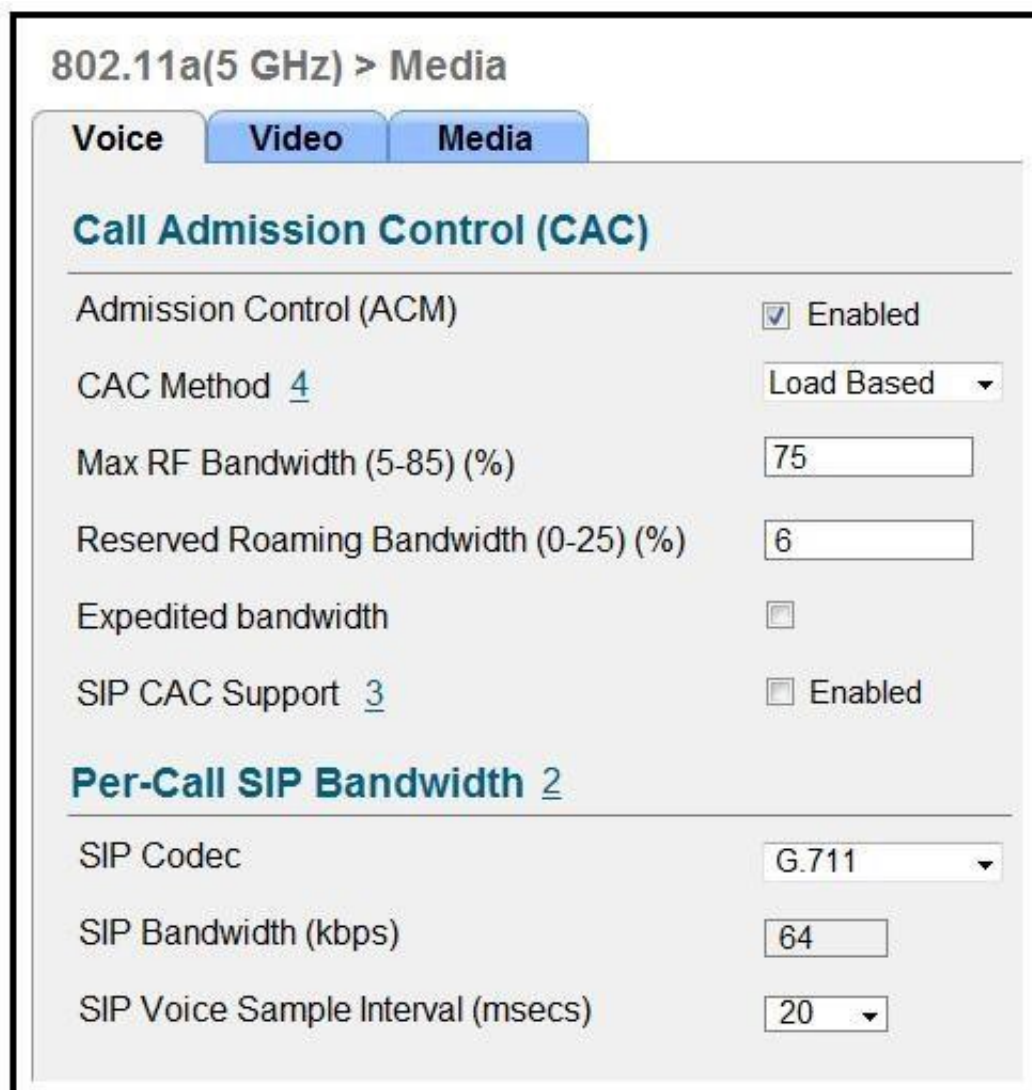

**802.11a(5 GHz) > Media**

**Voice Video Media**

**Call Admission Control (CAC)**

Admission Control (ACM) ☒ Enabled

CAC Method 4 Load Based ▼

Max RF Bandwidth (5-85) (%) 75

Reserved Roaming Bandwidth (0-25) (%) 6

Expedited bandwidth ☐

SIP CAC Support 3 ☐ Enabled

**Per-Call SIP Bandwidth 2**

SIP Codec G.711 ▼

SIP Bandwidth (kbps) 64

SIP Voice Sample Interval (msecs) 20 ▼

Which two items must be supported on the VoWLAN phones to take full advantage of this WLAN configuration? (Choose two.)

- A. TSPEC
- B. SIFS
- C. 802.11e
- D. WMM
- E. APSD

**Answer:** CD

#### NEW QUESTION 4

An engineer must implement Cisco Identity-Based Networking Services at a remote site using ISE to dynamically assign groups of users to specific IP subnets. If the subnet assigned to a client is available at the remote site, then traffic must be offloaded locally, and subnets are unavailable at the remote site must be tunneled back to the WLC. Which feature meets these requirements?

- A. learn client IP address
- B. FlexConnect local authentication
- C. VLAN-based central switching

D. central DHCP processing

**Answer:** C

#### NEW QUESTION 5

All APs are receiving multicast traffic, instead of only the APs that need it. What is the cause of this problem?

- A. The multicast group includes all APs
- B. The wrong multicast address was used
- C. The multicast group is assigned the wrong VLAN
- D. Multicast IGMP snooping is not enabled

**Answer:** D

#### NEW QUESTION 6

An IT team is growing quickly and needs a solution for management device access. The solution must authenticate users from an external repository instead of the current local on the WLC, and it must also identify the user and determine what level of access users should have. Which protocol do you recommend to achieve these goals?

- A. network policy server
- B. RADIUS
- C. TACACS+
- D. LDAP

**Answer:** C

#### NEW QUESTION 7

On a branch office deployment, it has been noted that if the FlexConnect AP is in standalone mode and loses connection to the WLC, all clients are disconnected, and the SSID is no longer advertised. Considering that FlexConnect local switching is enabled, which setting is causing this behavior?

- A. ISE NAC is enabled
- B. 802.11r Fast Transition is enabled
- C. Client Exclusion is enabled
- D. FlexConnect Local Auth is disabled

**Answer:** D

#### NEW QUESTION 8

An engineer is implementing a FlexConnect group for access points at a remote location using local switching but central DHCP. Which client feature becomes available only if this configuration is changed?

- A. multicast
- B. static IP
- C. fast roaming
- D. mDNS

**Answer:** B

#### NEW QUESTION 9

When implementing self-registration for guest/BYOD devices, what happens when an employee tries to connect four devices to the network at the same time?

- A. The last device is removed and the newly added device is updated as active device.
- B. The registration is allowed, but only one device is connected at any given time.
- C. All devices are allowed on the network simultaneously.
- D. Purge time dictates how long a device is registered to the portal.

**Answer:** B

#### NEW QUESTION 10

An engineer is implementing Cisco Identity-Based Networking on a Cisco AireOS controller. The engineer has two ACLs on the controller. The first ACL, named BASE\_ACL, is applied to the corporate\_clients interface on the WLC, which is used for all corporate clients. The second ACL, named HR\_ACL, is referenced by ISE in the Human Resources group policy. What is the resulting ACL when a Human Resources user connects?

- A. HR\_ACL appended with BASE\_ACL
- B. HR\_ACL only
- C. BASE\_ACL appended with HR\_ACL
- D. BASE\_ACL only

**Answer:** B

#### NEW QUESTION 10

During the EAP process and specifically related to the client authentication session, which encrypted key is sent from the RADIUS server to the access point?

- A. WPA key
- B. session key

- C. encryption key
- D. shared-secret key

**Answer:** B

#### NEW QUESTION 12

Branch wireless users report that they can no longer access services from head office but can access services locally at the site. New wireless users can associate to the wireless while the WAN is down. Which three elements (Cisco FlexConnect state, operation mode, and authentication method) are seen in this scenario? (Choose three.)

- A. authentication-local/switch-local
- B. WPA2 personal
- C. authentication-central/switch-central
- D. lightweight mode
- E. standalone mode
- F. WEB authentication

**Answer:** ABE

#### NEW QUESTION 16

Which two protocols are used to communicate between the Cisco MSE and the Cisco Prime Infrastructure network management software? (Choose two.)

- A. HTTPS
- B. Telnet
- C. SOAP
- D. SSH
- E. NMSP

**Answer:** AE

#### NEW QUESTION 20

Refer to the exhibit. A network administrator deploys the DHCP profiler service in two ISE servers: 10.3.10.101 and 10.3.10.102. All BYOD devices connecting to WLAN on VLAN63 have been incorrectly profiled and are assigned as unknown profiled endpoints. Which action efficiently rectifies the issue according to Cisco recommendations?

```
(Cisco WLC) >show dhcp proxy

DHCP ProxyBehaviour: enabled

!
interface Vlan63
 ip address 10.10.63.252/22
 description Dot1x_BYOD
 no shutdown
!
```

- A. Nothing needed to be added on the Cisco WLC or VLAN interface
- B. The ISE configuration must be fixed.
- C. Disable DHCP proxy on the Cisco WLC.
- D. Disable DHCP proxy on the Cisco WLC and run the ip helper-address command under the VLAN interface to point to DHCP and the two ISE servers.
- E. Keep DHCP proxy enabled on the Cisco WLC and define helper-address under the VLAN interface to point to the two ISE servers.

**Answer:** C

#### NEW QUESTION 22

.....

## Thank You for Trying Our Product

### We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### 300-430 Practice Exam Features:

- \* 300-430 Questions and Answers Updated Frequently
- \* 300-430 Practice Questions Verified by Expert Senior Certified Staff
- \* 300-430 Most Realistic Questions that Guarantee you a Pass on Your First Try
- \* 300-430 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The 300-430 Practice Test Here](#)**