

Exam Questions 300-610

Designing Cisco Data Center Infrastructure (DCID)

<https://www.2passeasy.com/dumps/300-610/>



NEW QUESTION 1

Drag the requirements from the left onto the correct policy types on the right.

Support tagging policies.

Scrub disks on disassociation.

Synchronize server power state.

Create a utility partition on a SD card.

Implement Hypervisor password policies.

Cisco Intersight Global Policy

Cisco UCS Manager Local Policy

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Support tagging policies.

Scrub disks on disassociation.

Synchronize server power state.

Create a utility partition on a SD card.

Implement Hypervisor password policies.

Cisco Intersight Global Policy

Implement Hypervisor password policies.

Synchronize server power state.

Support tagging policies.


Cisco UCS Manager Local Policy

Scrub disks on disassociation.

Create a utility partition on a SD card.

NEW QUESTION 2

Refer to the exhibit.

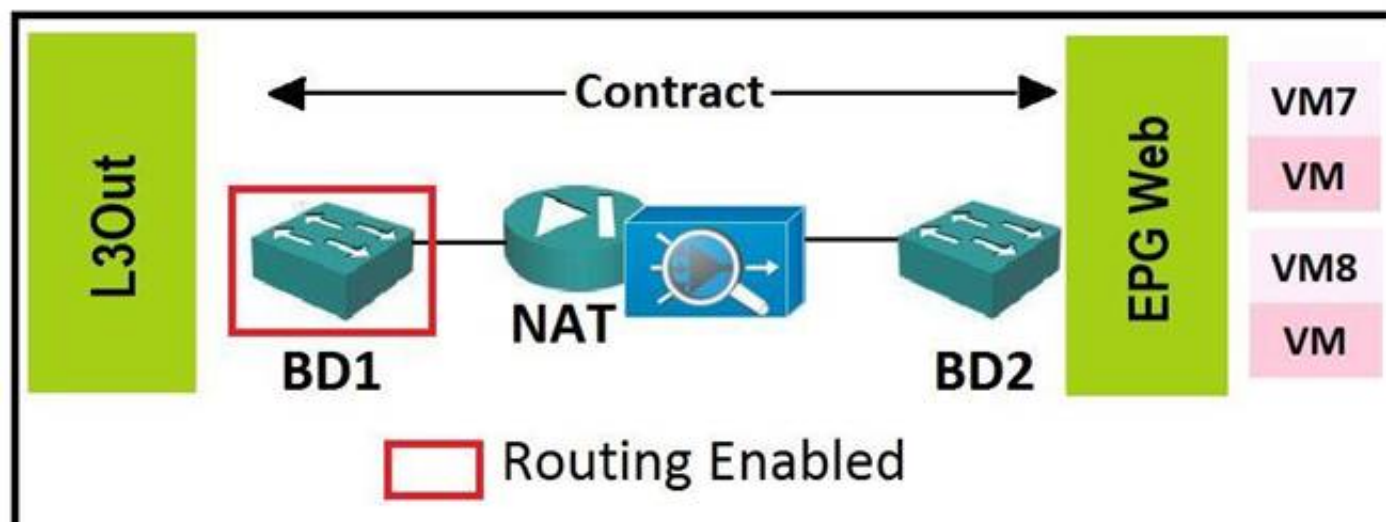

What must be the default gateway of the servers in EPG Web?

- A. subnet address of BD1
- B. subnet address of L3Out
- C. subnet address of BD2
- D. NAT appliance

Answer: D

NEW QUESTION 3

What influences the number of ISLs that are required between Cisco MDS Series switches?

- A. FCoE protocol
- B. type of storage
- C. end-to-end oversubscription ratio
- D. N Port virtualization

Answer: C

NEW QUESTION 4

Which protocol prevents fiber failures from causing a Layer 2 loop in a dark fiber DCI?

- A. BFD
- B. UDLD
- C. MCP
- D. LLDP

Answer: B

NEW QUESTION 5

Refer to the exhibit.

```
Switch(config-sys-qos)# show policy-map system
Type network-qos policy-maps
=====
policy-map type network-qos system
  class type network-qos class-fcoe
    match qos-group 1
    pause no-drop
    mtu 2000
  class type network-qos class-default
    match qos-group 0
    mtu 1500
Service-policy (qos) input: system
policy statistics status: disabled
Class-map (qos) : class fcoe (match-any)
  Match : cos 3
  set qos-group 1
Class-map (qos) : class-default (match-any)
  Match: any
  set qos-group 0
```

The FCoE packets fail to be forwarded through the switch. What is the minimum MTU QoS requirement for the FCoE to work?

- A. 9000 bytes
- B. 2000 bytes
- C. 2158 bytes

D. 2240 bytes

Answer: B

NEW QUESTION 6

Which feature provides a sandbox to convert NX-OS CLI commands to REST-based scripts on Cisco Nexus 7700 Series Switches?

- A. NX-API
- B. Postman
- C. Bash shell
- D. Guest shell

Answer: A

NEW QUESTION 7

A failure occurs on the network between two BFD and OSPF neighbors. Drag and drop the protocol actions from the left into the correct order on the right.

| | |
|---|--------|
| BFD notifies the local OSPF process that the BFD neighbor is no longer reachable. | step 1 |
| If an alternate path is available, routers immediately start converging on it. | Step 2 |
| The BFD neighboring session with the OSPF peer is terminated. | Step 3 |
| The local OSPF process tears down the OSPF neighbor relationship. | Step 4 |

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

| | |
|---|---|
| BFD notifies the local OSPF process that the BFD neighbor is no longer reachable. | The BFD neighboring session with the OSPF peer is terminated. |
| If an alternate path is available, routers immediately start converging on it. | BFD notifies the local OSPF process that the BFD neighbor is no longer reachable. |
| The BFD neighboring session with the OSPF peer is terminated. | The local OSPF process tears down the OSPF neighbor relationship. |
| The local OSPF process tears down the OSPF neighbor relationship. | If an alternate path is available, routers immediately start converging on it. |

NEW QUESTION 8


Which two configuration methods can be used to deploy QoS to Cisco MDS Series switches? (Choose two.)

- A. zone-based QoS
- B. multiple QoS policies that match individual devices
- C. VSAN-based QoS
- D. FCoE VLAN-based QoS
- E. multiple QoS policies that match multiple devices

Answer: AC

NEW QUESTION 9

Refer to the exhibit.

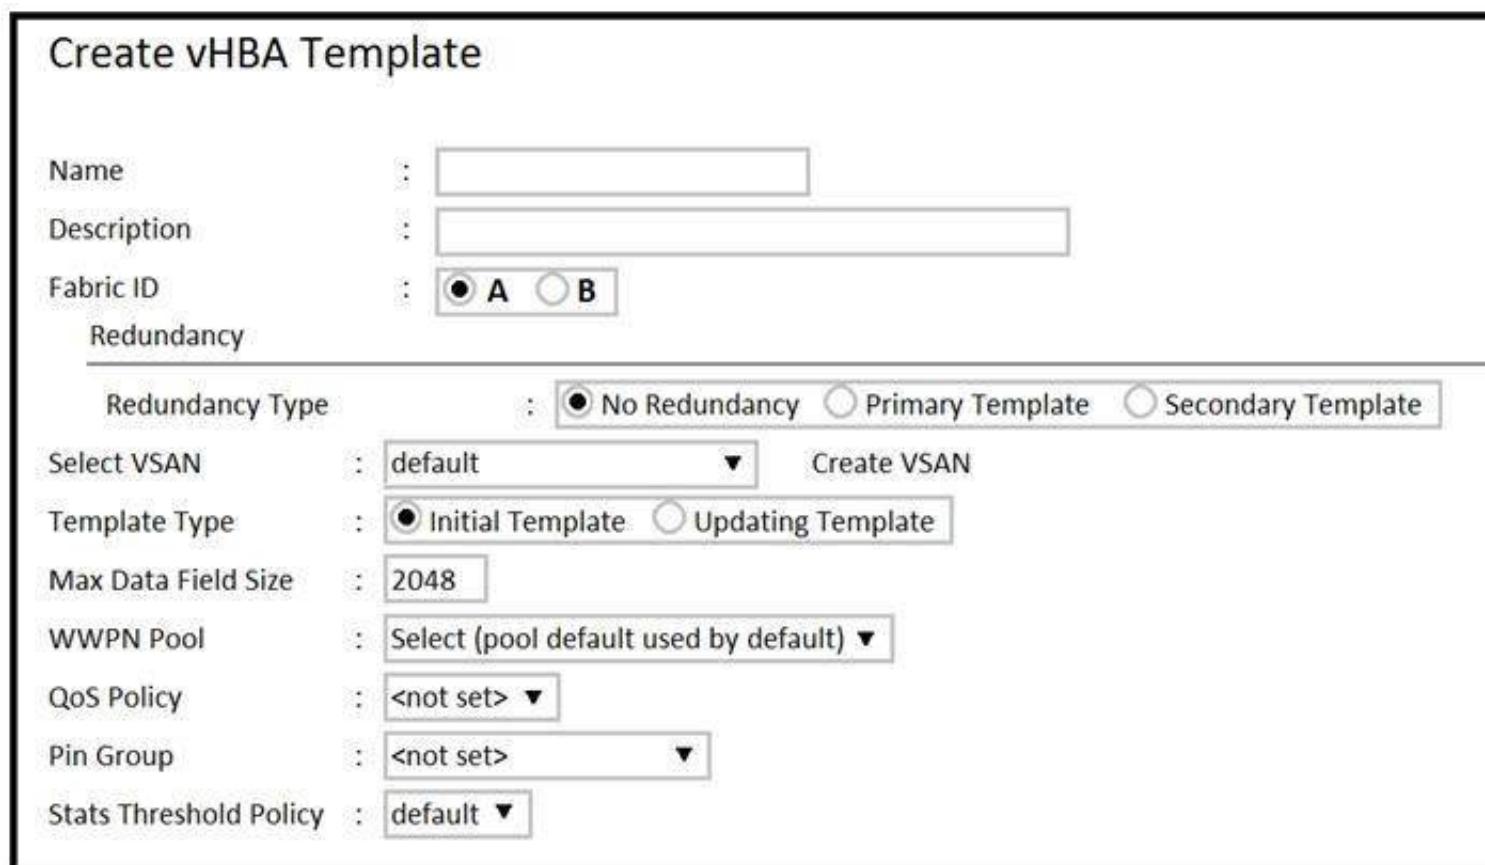

Create vHBA Template

Name :

Description :

Fabric ID : ☒ A ☐ B

Redundancy

Redundancy Type : ☒ No Redundancy ☐ Primary Template ☐ Secondary Template

Select VSAN :

Template Type : ☒ Initial Template ☐ Updating Template

Max Data Field Size :

WWPN Pool :

QoS Policy :

Pin Group :

Stats Threshold Policy :

Which template is used when a vHBA template pair is created for a specific server that inherits its attributes from an existing template?

- A. Secondary
- B. Initial
- C. Updating
- D. Primary

Answer: B

NEW QUESTION 10

Which orchestration tool provides a graphical interface to manage LAN and SAN fabrics?

- A. Cisco Virtual Topology System
- B. Cisco Data Center Network Manager
- C. Cisco Nexus Fabric Manager
- D. Cisco CloudCenter

Answer: B

NEW QUESTION 10

A Cisco UCS instance has four interfaces on a UCS VIC. Where on the fabric interconnect does each interface terminate?

- A. vPC
- B. virtual interface
- C. port channel
- D. physical port

Answer: B

NEW QUESTION 11

An engineer is designing a data center that uses FCIP. How is QoS configured in this environment?

- A. A separate DSCP value and CoPP must be configured for all FCIP traffic and another for all of the FCIP in the data connection.
- B. A separate DSCP value must be configured for all FCIP VSAN traffic.
- C. A separate DSCP value and priority queuing must be configured for all FCIP traffic.
- D. Two separate DSCP values must be configured, one for all of the FCIP frames in the control TCP connection and another for all of the FCIP frames in the data connection.

Answer: D

NEW QUESTION 16

Which mode must be enabled on a Cisco UCS Fabric Interconnect to connect directly to a storage array?

- A. NPIV mode
- B. FC end-host mode
- C. NPV mode
- D. FC switching mode

Answer: D

Explanation:

Section: Storage Network Design

NEW QUESTION 17

Which feature must be configured to connect a classical Ethernet network to a data center network so that the data center network appears to be one large switch.

- A. VPC+
- B. UDLD
- C. EVPN
- D. OSPF

Answer: C

NEW QUESTION 22

Which Ethernet to Cisco Fabric Interconnect connectivity configuration is supported when FCoE is implemented?

- A. VSS that has unified uplinks
- B. Ethernet and unified ports on the same port channel
- C. vPC that has unified uplinks
- D. cross-connections with pinning

Answer: C

NEW QUESTION 23

What is an advantage of using OTV as compared to VPLS for data center redundancy?

- A. prevents loops on point-to-point links
- B. provides head-end replication
- C. uses a proactive MAC advertisement
- D. provides full-mesh connectivity

Answer: A

NEW QUESTION 27

What are two functions of a Network Services Orchestrator in an NFV environment? (Choose two.)

- A. It operates at the resource-facing services layer and provides overall lifecycle management at the network service level.
- B. It provides an API-based northbound interface for transparent integration with systems that operate at the resource-facing services layer.
- C. It provides a standards-based southbound interface for transparent integration with systems that operate at the customer-facing services layer.
- D. It provides a standards-based northbound interface for transparent integration with systems that operate at the customer-facing services layer.
- E. It operates at the customer-facing services layer and provides the management interface for the virtual network devices.

Answer: AB

NEW QUESTION 32

Which address pool is used when a vHBA template is created?

- A. MAC
- B. WWPN
- C. IP
- D. UUID

Answer: B

NEW QUESTION 33

Which approach splits a pair of clustered fabric interconnects into two standalone devices?

- A. Run the disable fips-mode command on each fabric interconnect.
- B. Run the connect local-management command on each fabric interconnect.
- C. Erase the configuration of both fabric interconnects.
- D. Unplug the Layer 1 and Layer 2 interfaces between the devices.

Answer: D

NEW QUESTION 38

Which two automation requirements can be met by using Puppet? (Choose two.)

- A. Push configuration updates immediately to servers.
- B. Enable clients to pull changes to configuration files.
- C. Enable clients to pull changes without installing an agent.
- D. Provide support for writing new modules in Python.
- E. Enable one-off infrastructure changes to be performed manually.

Answer: AB

NEW QUESTION 43

Which two configurations are available by using a service profile template in Cisco UCS Manager? (Choose two.)

- A. number of vHBAs
- B. ARP entries
- C. UUID assignment
- D. VXLAN membership
- E. target server

Answer: AC

NEW QUESTION 46

Which technology enables Layer 2 extension between remote data center sites?

- A. FCIP
- B. GRE
- C. DMVPN
- D. OTV

Answer: D

NEW QUESTION 48


Drag the appropriate from the left onto the current UDLD modes of operation on the right.

| | |
|---|---|
| Uses STP if UDLD information times out. | Normal Mode <div></div> <div></div> |
| Detects when a port is stuck. | |
| Disables a port that has a high error rate. | Aggressive Mode <div></div> <div></div> |
| Allows a port that has a high error rate. | |

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

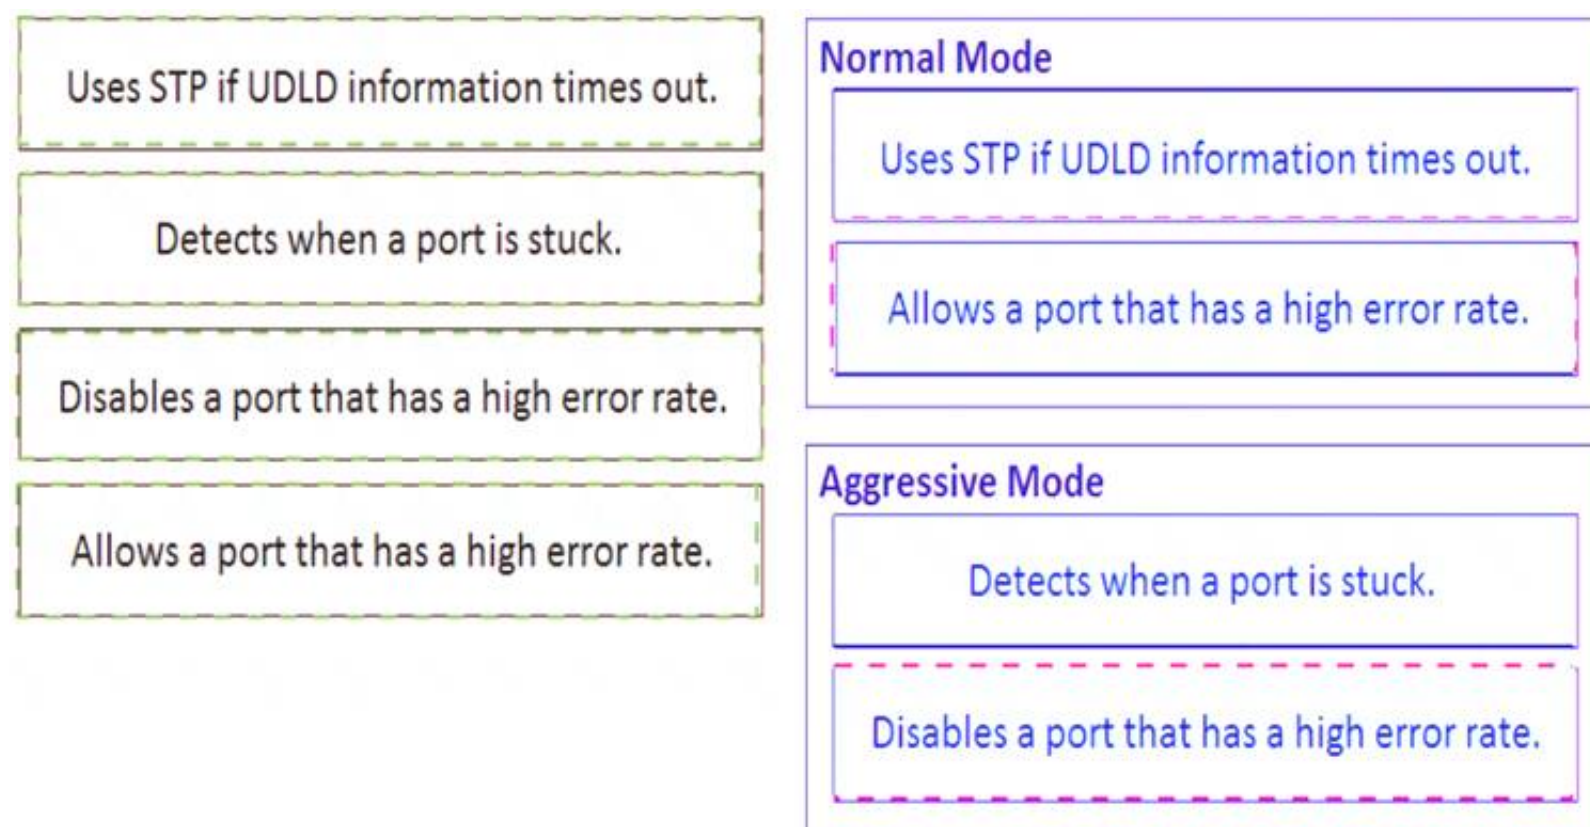

NEW QUESTION 53

Which orchestration tool should be used for the management and analytics of servers across multiple sites?

- A. Cisco Intersight
- B. Cisco Nexus Fabric Manager
- C. Cisco UCS Manager
- D. Cisco Data Center Network Manager

Answer: A

NEW QUESTION 54

Which two methods mitigate congestion in a SAN network? (Choose two.)

- A. Configure ER_RDY to allow splitting of each ISL between switches into separate virtual links.
- B. Use the port-monitor command to detect slow drain devices.
- C. Configure the port channel to enable individual buffer-to-buffer credits.
- D. Configure the port monitor to allow categorization of a specific device as slow.
- E. Configure the flow control for the FC to use R_RDY.

Answer: BD

NEW QUESTION 58

Which factor determines the choice of platform designing a Cisco HyperFlex infrastructure to support computer-aided design applications?

- A. network speed
- B. GPU support
- C. storage capacity
- D. processor count

Answer: C

NEW QUESTION 60

An engineer deploys LISP VM mobility. Which feature is configured on the interfaces that have VM mobility enabled?

- A. IP redirects
- B. flow control
- C. proxy ARP
- D. HSRP

Answer: C

NEW QUESTION 62

What is a design consideration when implementing FSPF?

- A. Routes are based on the domain ID.
- B. Routes are based on the distance vector protocol.
- C. FSPF runs only on F Ports.
- D. FSPF runs on a per-chassis basis.

Answer: A

NEW QUESTION 65

Which pools are used when a vNIC template is created in Cisco UCS Manager?

- A. WWPN
- B. UUID
- C. MAC
- D. IP

Answer: C

NEW QUESTION 70

Which two configurations allow for routing traffic between two VDCs? (Choose two.)

- A. Connect the VDCs to an external Layer 3 device.
- B. Cross-connect the ports between the VDCs.
- C. Create VRF-aware software infrastructure interfaces.
- D. Create a policy map in the default VDC that routes traffic between the VDCs.
- E. Create interfaces in the VDC that can be accessed by another VDC.

Answer: AD

NEW QUESTION 72

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 300-610 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 300-610 Product From:

<https://www.2passeasy.com/dumps/300-610/>

Money Back Guarantee

300-610 Practice Exam Features:

- * 300-610 Questions and Answers Updated Frequently
- * 300-610 Practice Questions Verified by Expert Senior Certified Staff
- * 300-610 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 300-610 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year