



Fortinet

Exam Questions NSE7_EFW-7.0

Fortinet NSE 7 - Enterprise Firewall 7.0

About ExamBible

Your Partner of IT Exam

Found in 1998

ExamBible is a company specialized on providing high quality IT exam practice study materials, especially Cisco CCNA, CCDA, CCNP, CCIE, Checkpoint CCSE, CompTIA A+, Network+ certification practice exams and so on. We guarantee that the candidates will not only pass any IT exam at the first attempt but also get profound understanding about the certificates they have got. There are so many alike companies in this industry, however, ExamBible has its unique advantages that other companies could not achieve.

Our Advances

* 99.9% Uptime

All examinations will be up to date.

* 24/7 Quality Support

We will provide service round the clock.

* 100% Pass Rate

Our guarantee that you will pass the exam.

* Unique Gurantee

If you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

NEW QUESTION 1

View the exhibit, which contains the output of get sys ha status, and then answer the question below.

```

NGFW # get sys ha status
HA Health Status: ok
Model: FortiGate0VM64
Mode: HA A-P
Group: 0
Debug: 0
Cluster Uptime: 0 days 01:07:35
Master selected using:
<2017/04/24 09:43:44> FGVM010000077649 is selected as the master because it has the largest value of override pr
<2017/04/24 08:50:53> FGVM010000077 is selected as the master because it's the only member in the cluster.
ses_pickup: disable
override: enable
Configuration Status:
FGVM010000077649(updated 1 seconds ago): in-sync
FGVM010000077650(updated 0 seconds ago): out-of-sync
System Usage stats:
FGVM010000077649(updated 1 seconds ago):
sessions=30, average-cpu-user/nice/system/idle=0%/0%/0%/100%, memory-60%
FGVM010000077650(updated 0 seconds ago):
sessions=2, average-cpu-user/nice/system/idle=0%/0%/0%/100%, memory-61%
HBDEV stats:
FGVM010000077649(updated 1 seconds ago):
port7: physical/10000full, up, rx-bytes/packets/dropped/errors=7358367/17029/25/0, tx=7721830/17182/0/0
FGVM010000077650(updated 0 seconds ago):
port7: physical/10000full, up, rx-bytes/packets/dropped/errors=7793722/17190/0/0, tx=8940374/20806/0/0
Master: NGFW      , FGVM010000077649
Slave : NGFW-2    , FGVM010000077650
number of vcluster: 1
vcluster 1: work 169.254.0.2
Master:0 FGVM010000077649
Slave :1 FGVM010000077650
    
```

Which statements are correct regarding the output? (Choose two.)

- A. The slave configuration is not synchronized with the master.
- B. The HA management IP is 169.254.0.2.
- C. Master is selected because it is the only device in the cluster.
- D. port 7 is used the HA heartbeat on all devices in the cluster.

Answer: AD

NEW QUESTION 2

Refer to the exhibit, which shows a session entry. Which statement about this session is true?

```

session info: proto=1 proto_state=00 duration=1 expire=59 timeout
sockflag=00000000 sockport=0 av_idx=0 use=3
origin-shaper=
reply-shaper=
per_ip_shaper=
ha_id=0 policy_dir=0 tunnel=/ vlan_cos=0/255
state=log may_dirty none
statistic(bytes/packets/allow_err): org=168/2/1 reply=168/2/1 tup
tx speed(Bps/kbps): 97/0 rx speed(Bps/kbps): 97/0
origin->sink: org pre->post, reply pre->post dev=9->3/3->9 gwy=10.
hook=post dir=org act=snat 10.1.10.10:40602->10.200.5.1:8(10.200.
hook=pre dir=reply act=dnat 10.200.5.1:60430->10.200.1.1:0(10.1.1
misc=0 policy_id=1 auth_info=0 chk_client_info=0 vd=0
serial=0002a5c9 tos=ff/ff app_list=0 app=0 url_cat=0
dd_type=0 dd_mode=0
    
```

- A. It is an ICMP session from 10.1.10.10 to 10.200.5. 1.
- B. It is a TCP session in close_wait state, from 10.
- C. 10.10 to 10.200.1.1.
- D. It is an ICMP session from 10.1.10.10 to 10.200.1.1.
- E. It is a TCP session in the established state, from 10.1.10.10 to 10.200.5.1.

Answer: A

NEW QUESTION 3

Refer to the exhibit, which contains partial outputs from two routing debug commands.

```

FortiGate # get router into routing-table database

S   0.0.0.0/0 [20/0] via 100.64.2.254, port2, [10/0]
S  *>0.0.0.0/0 [10/0] via 100.64.1.254, port1

FortiGate # get router info routing-table all

S*  0.0.0.0/0 [10/0] via 100.64.1.254, port1
    
```

Why is the port2 default route not in the second command's output?

- A. It has a higher priority value than the default route using port1.
- B. It is disabled in the FortiGate configuration.
- C. It has a lower priority value than the default route using port1.

D. It has a higher distance than the default route using port1.

Answer: D

NEW QUESTION 4

Examine the partial output from the IKE real time debug shown in the exhibit; then answer the question below.

```
#diagnose debug application ike -1
#diagnose debug enable
ike 0: .....: 75: responder: aggressive mode get 1st message...
...
ike 0: .....:76: incoming proposal:
ike 0: .....:76: proposal id = 0:
ike 0: .....:76: protocol id= ISAKMP:
ike 0: .....:76: trans_id = KEY_IKE.
ike 0: .....:76: encapsulation = IKE/none
ike 0: .....:76: type= OAKLEY_ENCRYPT_ALG, val=AES_CBC.
ike 0: .....:76: type= OAKLEY_HASH_ALG, val=SHA2_256.
ike 0: .....:76: type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0: .....:76: type=OAKLEY_GROUP, val=MODP2048.
ike 0: .....:76: ISAKMP SA lifetime=86400
ike 0: .....:76: my proposal, gw Remote:
ike 0: .....:76: proposal id=1:
ike 0: .....:76: protocol id= ISAKMP:
ike 0: .....:76: trans_id= KEY_IKE.
ike 0: .....:76: encapsulation = IKE/none
ike 0: .....:76: type=OAKLEY_ENCRYPT_ALG, val=DES_CBC.
ike 0: .....:76: type=OAKLEY_HASH_ALG, val=SHA2_256.
ike 0: .....:76: type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0: .....:76: type=OAKLEY_GROUP, val=MODP2048.
ike 0: .....:76: ISAKMP SA lifetime=86400
ike 0: .....:76: proposal id=1:
ike 0: .....:76: protocol id= ISAKMP:
ike 0: .....:76: trans_id= KEY_IKE.
ike 0: .....:76: encapsulation = IKE/none
ike 0: .....:76: type=OAKLEY_ENCRYPT_ALG, val=DES_CBC.
ike 0: .....:76: type= OAKLEY_HASH_ALG, val=SHA2_256.
ike 0: .....:76: type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0: .....:76: type=OAKLEY_GROUP, val=MODP1536.
ike 0: .....:76: ISAKMP SA lifetime=86400
ike 0: .....:76: negotiation failure
ike Negotiate ISAKMP SA Error: ike 0: .....:76: no SA proposal chosen
```

Why didn't the tunnel come up?

- A. IKE mode configuration is not enabled in the remote IPsec gateway.
- B. The remote gateway's Phase-2 configuration does not match the local gateway's phase-2 configuration.
- C. The remote gateway's Phase-1 configuration does not match the local gateway's phase-1 configuration.
- D. One IPsec gateway is using main mode, while the other IPsec gateway is using aggressive mode.

Answer: C

NEW QUESTION 5

Which of the following statements is true regarding a FortiGate configured as an explicit web proxy?

- A. FortiGate limits the number of simultaneous sessions per explicit web proxy user
- B. This limit CANNOT be modified by the administrator.
- C. FortiGate limits the total number of simultaneous explicit web proxy users.
- D. FortiGate limits the number of simultaneous sessions per explicit web proxy user The limit CAN be modified by the administrator
- E. FortiGate limits the number of workstations that authenticate using the same web proxy user credentials.This limit CANNOT be modified by the administrator.

Answer: B

Explanation:

https://help.fortinet.com/fos50hlp/52data/Content/FortiOS/fortigate-WAN-opt-52/web_proxy.htm#Explicit2

The explicit proxy does not limit the number of active sessions for each user. As a result the actual explicit proxy session count is usually much higher than the number of explicit web proxy users. If an excessive number of explicit web proxy sessions is compromising system performance you can limit the amount of users if the FortiGate unit is operating with multiple VDOMs.

NEW QUESTION 6

View the exhibit, which contains the partial output of an IKE real-time debug, and then answer the question below.

```
ike 0:9268ab9dea63aa3/0000000000000000:591: responder: main mode get 1st message...
ike 0:9268ab9dea63aa3/0000000000000000:591: incoming proposal:
ike 0:9268ab9dea63aa3/0000000000000000:591: proposal id = 0:
ike 0:9268ab9dea63aa3/0000000000000000:591: protocol id = ISAKMP:
ike 0:9268ab9dea63aa3/0000000000000000:591: trans_id = KEY IKE.
ike 0:9268ab9dea63aa3/0000000000000000:591: encapsulation = IKE/none
ike 0:9268ab9dea63aa3/0000000000000000:591: type=OAKLEY_ENCRYPT_ALG, val=3DES_CBC.
ike 0:9268ab9dea63aa3/0000000000000000:591: type=OAKLEY_HASH_ALG, val=SHA2_256.
ike 0:9268ab9dea63aa3/0000000000000000:591: type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0:9268ab9dea63aa3/0000000000000000:591: type=OAKLEY_GROUP, val=MODP1536.
ike 0:9268ab9dea63aa3/0000000000000000:591: ISAKMP SA lifetime=86400
ike 0:9268ab9dea63aa3/0000000000000000:591: proposal id=0:
ike 0:9268ab9dea63aa3/0000000000000000:591: protocol id = ISAKMP:
ike 0:9268ab9dea63aa3/0000000000000000:591: trans_id = KEY IKE.
ike 0:9268ab9dea63aa3/0000000000000000:591: encapsulation = IKE/none
ike 0:9268ab9dea63aa3/0000000000000000:591: type=OAKLEY_ENCRYPT_ALG, val=3DES_CBC.
ike 0:9268ab9dea63aa3/0000000000000000:591: type=OAKLEY_HASH_ALG, val=SHA2_256.
ike 0:9268ab9dea63aa3/0000000000000000:591: type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0:9268ab9dea63aa3/0000000000000000:591: type=OAKLEY_GROUP, val=MODP1536.
ike 0:9268ab9dea63aa3/0000000000000000:591: ISA KMP SA lifetime=86400
ike 0:9268ab9dea63aa3/0000000000000000:591: my proposal, gw VPN:
ike 0:9268ab9dea63aa3/0000000000000000:591: proposal id = 1:
ike 0:9268ab9dea63aa3/0000000000000000:591: protocol id = ISAKMP:
ike 0:9268ab9dea63aa3/0000000000000000:591: trans_id = KEY IKE.
ike 0:9268ab9dea63aa3/0000000000000000:591: encapsulation = IKE/none
ike 0:9268ab9dea63aa3/0000000000000000:591: type=OAKLEY_ENCRYPT_ALG, val=AES_CBC,
key-len=128
ike 0:9268ab9dea63aa3/0000000000000000:591: type=OAKLEY_HASH_ALG, val=SHA2_512.
ike 0:9268ab9dea63aa3/0000000000000000:591: type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0:9268ab9dea63aa3/0000000000000000:591: type=OAKLEY_GROUP, val=MODP2048.
ike 0:9268ab9dea63aa3/0000000000000000:591: ISAKMP SA lifetime=86400
ike 0:9268ab9dea63aa3/0000000000000000:591: proposal id = 1:
ike 0:9268ab9dea63aa3/0000000000000000:591: protocol id = ISAKMP:
ike 0:9268ab9dea63aa3/0000000000000000:591: trans_id = KEY IKE.
ike 0:9268ab9dea63aa3/0000000000000000:591: encapsulation = IKE/none
ike 0:9268ab9dea63aa3/0000000000000000:591: type=OAKLEY_ENCRYPT_ALG, val=AES_CBC,
key-len=128
ike 0:9268ab9dea63aa3/0000000000000000:591: type=OAKLEY_HASH_ALG, val=SHA2_512.
ike 0:9268ab9dea63aa3/0000000000000000:591: type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0:9268ab9dea63aa3/0000000000000000:591: type=OAKLEY_GROUP, val=MODP2048.
ike 0:9268ab9dea63aa3/0000000000000000:591: ISAKMP SA lifetime=86400
ike 0:9268ab9dea63aa3/0000000000000000:591: proposal id = 1:
ike 0:9268ab9dea63aa3/0000000000000000:591: protocol id = ISAKMP:
ike 0:9268ab9dea63aa3/0000000000000000:591: trans_id = ISAKMP:
ike 0:9268ab9dea63aa3/0000000000000000:591: encapsulation = IKE/none
ike 0:9268ab9dea63aa3/0000000000000000:591: type= OAKLEY_ENCRYPT_ALG, val =AES-CBC,
key-len=128
ike 0:9268ab9dea63aa3/0000000000000000:591: type=OAKLEY_HASH_ALG, val=SHA2_512.
ike 0:9268ab9dea63aa3/0000000000000000:591: type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0:9268ab9dea63aa3/0000000000000000:591: type=OAKLEY_GROUP, val=MODP1536.
ike 0:9268ab9dea63aa3/0000000000000000:591: ISAKMP SA lifetime=86400
```

The administrator does not have access to the remote gateway. Based on the debug output, what configuration changes can the administrator make to the local gateway to resolve the phase 1 negotiation error?

- A. Change phase 1 encryption to 3DES and authentication to SHA128.
- B. Change phase 1 encryption to AES128 and authentication to SHA512.
- C. Change phase 1 encryption to AESCBC and authentication to SHA2.
- D. Change phase 1 encryption to AES256 and authentication to SHA256.

Answer: D

NEW QUESTION 7

A FortiGate device has the following LDAP configuration:

```
config user ldap
  edit "WindowsLDAP"
    set server "10.0.1.10"
    set cnid "cn"
    set dn "cn=user, dc=trainingAD, dc=training, dc=lab"
    set type regular
    set username "cn=administrator, cn=users, dc=trainingAD,
dc=training, dc=lab"
    set password xxxxx
  next
end
```

The LDAP user student cannot authenticate. The exhibit shows the output of the authentication real time debug while testing the student account:

```
#diagnose debug application fnbamd -l
#diagnose debug enable
#diagnose test authserver ldap WindowsLDAP student password
fnbamd_fsm.c[1819] handle_req-Recv auth req 4 for student in WindowsLDAP
opt=27 prot=0
fnbamd_fsm.c[336] _compose_group_list_from_req_Group 'WindowsLDAP'
fnbamd_pop3.c[573] fnbamd_pop3_start-student
fnbamd_cfg.c[932] fnbamd_cfg-get_ldap_ist_by_server-Loading LDAP server
'WindowsLDAP'
fnbamd_ldap.c[992] resolve_ldap_FQDN-Resolved address 10.0.1.10, result 10.0.1.10
fnbamd_fsm.c[428] create_auth_session-Total 1 server(s) to try
fnbamd_ldap.c[1700] fnbamd_ldap_get_result-Error in ldap result: 49
(Invalid credentials)
fnbamd_ldap.c[2028] fnbamd_ldap_get_result-Auth denied
fnbamd_auth.c[2188] fnbamd_auth_poll_ldap-Result for ldap svr 10.0.1.10 is denied
fnbamd_comm.c[169] fnbamd_comm_send_result-Sending result 1 for req 4
fnbamd_fsm.c[568] destroy_auth_session-delete session 4
authenticate 'student' against 'WindowsLDAP' failed!
```

Based on the above output, what FortiGate LDAP settings must the administrator check? (Choose two.)

- A. cnid.
- B. username.
- C. password.
- D. dn.

Answer: BC

Explanation:

<https://kb.fortinet.com/kb/viewContent.do?externalId=13141>

NEW QUESTION 8

Refer to the exhibit, which contains the output of get system ha status. Which two statements about the output are true? (Choose two.)

```
NGFW-1 # get system ha status
HA Health Status: OK
Model: FortiGate-VM64
Mode: HA A-P
Group: 2
Debug: 0
Cluster Uptime: 0 days 4:23:19
Cluster state change time: 2019-01-25 10:19:46
Master selected using:
<2019/01/25 10:19:46> FGVMO10000077649 is selected as the master because it has the largest value
of override priority.
<2019/01/25 10:19:40> FGVMO10000077649 is selected as the master because it's the only member in
the cluster.
ses_pickup: disable
override: enable
Configuration Status:
FGVMO10000077649 (updated 1 seconds ago): in-sync
FGVMO10000077650 (updated 0 seconds ago): out-of-sync
System Usage stats:
FGVMO10000077649 (updated 1 seconds ago):
sessions=27, average-cpu-user/nice/system/idle=1%/0%/0%/99%, memory=56%
FGVMO10000077650 (updated 0 seconds ago):
sessions=2, average-cpu-user/nice/system/idle=1%/0%/0%/99%, memory=57%
HBDEV stats:
FGVMO10000077649 (updated 1 seconds ago):
port7: physical/10000full, up, rx-bytes/packets/dropped/errors=63817615/202024/0/0, tx=
71110281/121109/0/0
FGVMO10000077650 (updated 0 seconds ago):
port7: physical/10000full, up, rx-bytes/packets/dropped/errors=79469596/122024/0/0, tx=
30877890/107878/0/0
Master: NGFW-1, FGVMO10000077649, cluster index = 1
Slave : NGFW-2, FGVMO10000077650, cluster index = 0
number of vcluster: 1
vcluster 1: work 169.254.0.2
Master: FGVMO10000077649, operating cluster index = 0
Slave : FGVMO10000077650, operating cluster index = 1
```

- A. The slave configuration is synchronized with the master.
- B. port7 is used as the HA heartbeat on all devices in the cluster.
- C. Primary is selected based on the priority configured under config system ha.
- D. The HA management IP is 169.254.0.2.

Answer: BC

NEW QUESTION 9

What is the purpose of an internal segmentation firewall (ISFW)?

- A. It inspects incoming traffic to protect services in the corporate DMZ.
- B. It is the first line of defense at the network perimeter.
- C. It splits the network into multiple security segments to minimize the impact of breaches.
- D. It is an all-in-one security appliance that is placed at remote sites to extend the enterprise network.

Answer: C

Explanation:

ISFW splits your network into multiple security segments. They serve as a breach containers from attacks that come from inside.

NEW QUESTION 10

Which statements about bulk configuration changes using FortiManager CLI scripts are correct? (Choose two.)

- A. When executed on the Policy Package, ADOM database, changes are applied directly to the managed FortiGate.
- B. When executed on the Device Database, you must use the installation wizard to apply the changes to the managed FortiGate.
- C. When executed on the All FortiGate in ADOM, changes are automatically installed without creating a new revision history.
- D. When executed on the Remote FortiGate directly, administrators do not have the option to review the changes prior to installation.

Answer: BD

Explanation:


CLI scripts can be run in three different ways: Device Database: By default, a script is executed on the device database. It is recommend you run the changes on the device database (default setting), as this allows you to check what configuration changes you will send to the managed device. Once scripts are run on the device database, you can install these changes to a managed device using the installation wizard.

Policy Package, ADOM database: If a script contains changes related to ADOM level objects and policies, you can change the default selection to run on Policy Package, ADOM database and can then be installed using the installation wizard.

Remote FortiGate directly (through CLI): A script can be executed directly on the device and you don't need to install these changes using the installation wizard. As the changes are directly installed on the managed device, no option is provided to verify and check the configuration changes through FortiManager prior to executing it.

NEW QUESTION 10

Exhibits:

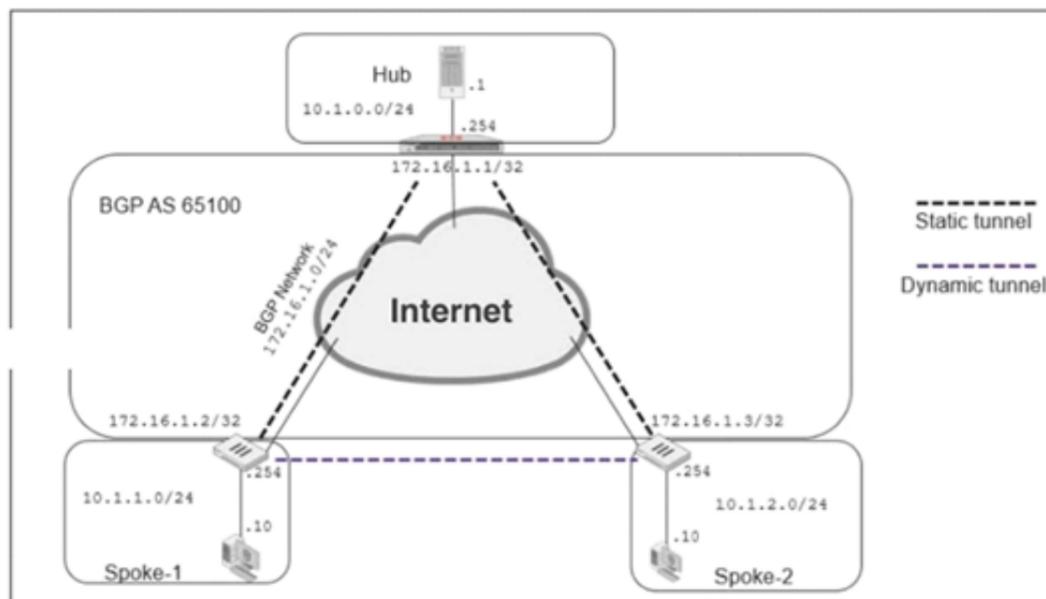

```

now router bgp
router bgp
  as 65100
  router-id 172.16.1.1
  fig neighbor-group
  edit "advpn"
    set remote-as 65100

    set route-reflector-client disable
  next
  fig neighbor-range
  edit 1
    set prefix 172.16.1.0 255.255.255.0
    set neighbor-group "advpn"
  next

```

Refer to the exhibits, which contain the network topology and BGP configuration for a hub.

An administrator is trying to configure ADVPN with a hub-spoke VPN setup using iBGP. All the VPNs are up and connected to the hub. The hub is receiving route information from both spokes over iBGP; however, the spokes are not receiving route information from each other.

What change must the administrator make to the hub BGP configuration so that the routes learned by one spoke are forwarded to the other spokes?

- A. Configure an individual neighbor and remove neighbor-range configuration.
- B. Configure the hub as a route reflector client.

- C. Change the router id to 10.1.0.254.
- D. Make the configuration of remote-as different from the configuration of local-as.

Answer: B

NEW QUESTION 13

View the exhibit, which contains the output of a BGP debug command, and then answer the question below.

```
# get router info bgp summary
BGP router identifier 0.0.0.117, local AS number 65117
BGP table version is 104
3 BGP AS-PATH entries
0 BGP community entries

Neighbor  V  AS  MsgRcvd  MsgSent  TblVer  InQ  OutQ  Up/Down  State/PfxRcd
10.125.0.60 4 65060  1698      1756    103    0    0 03:02:49      1
10.127.0.75 4 65075  2206      2250    102    0    0 02:45:55      1
10.200.3.1  4 65501   101        115     0     0    0 never          Active
```

Total number of neighbors 3

Which of the following statements about the exhibit are true? (Choose two.)

- A. For the peer 10.125.0.60, the BGP state of is Established.
- B. The local BGP peer has received a total of three BGP prefixes.
- C. Since the BGP counters were last reset, the BGP peer 10.200.3.1 has never been down.
- D. The local BGP peer has not established a TCP session to the BGP peer 10.200.3.1.

Answer: AD

NEW QUESTION 16

Which two tasks are automated using the Install Wizard on FortiManager? (Choose two.)

- A. Installing configuration changes to managed devices
- B. Importing interface mappings from managed devices
- C. Adding devices to FortiManager
- D. Previewing pending configuration changes for managed devices

Answer: AD

NEW QUESTION 19

A FortiGate has two default routes:

```
config router static
  edit 1
    set gateway 10.200.1.254
    set priority 5
    set device "port1"
  next
  edit2
    set gateway 10.200.2.254
    set priority 10
    set device "port2"
  next
end
```

All Internet traffic is currently using port1. The exhibit shows partial information for one sample session of Internet traffic from an internal user:

```
# diagnose sys session list
Session info: proto=6 proto_state=01 duration =17 expire=7 timeout=3600
flags= 00000000 sockflag=00000000 sockport=0 av idx=0 use=3
ha_id=0 policy_dir=0 tunnel=/
state=may_dirty none app_ntf
statistic (bytes/packets/allow_err): org=575/7/1 reply=23367/19/1 tuples=2
origin->sink: org pre->post, reply pre->post dev=4->2/2->4
gwy=10.200.1.254/10.0.1.10
hook=post dir=org act=snat 10.0.1.10:64907-
>54.239.158.170:80(10.200.1.1:64907)
hook=pre dir=reply act=dnat 54.239.158.170:80-
>10.200.1.1:64907(10.0.1.10:64907)
pos/(before, after) 0/(0,0), 0/(0,0)
misc=0 policy_id=1 auth_info=0 chk_client_info=0 vd=0
serial=00000294 tos=ff/ff ips_view=0 app_list=0 app=0
dd_type=0 dd_mode=0
```

What would happen with the traffic matching the above session if the priority on the first default route (IDd1) were changed from 5 to 20?

- A. The session would be deleted, and the client would need to start a new session.
- B. The session would remain in the session table, and its traffic would start to egress from port2.
- C. The session would remain in the session table, but its traffic would now egress from both port1 and port2.
- D. The session would remain in the session table, and its traffic would still egress from port1.

Answer: D

NEW QUESTION 23

An administrator has decreased all the TCP session timers to optimize the FortiGate memory usage. However, after the changes, one network application started to have problems. During the troubleshooting, the administrator noticed that the FortiGate deletes the sessions after the clients send the SYN packets, and before the arrival of the SYN/ACKs. When the SYN/ACK packets arrive to the FortiGate, the unit has already deleted the respective sessions. Which TCP session timer must be increased to fix this problem?

- A. TCP half open.
- B. TCP half close.
- C. TCP time wait.
- D. TCP session time to live.

Answer: A

Explanation:

http://docs-legacy.fortinet.com/fos40hlp/43prev/wwhelp/wwhimpl/common/html/wwhelp.htm?context=fgt&file=CLI_get_Commands.58.25.html

The tcp-halfopen-timer controls for how long, after a SYN packet, a session without SYN/ACK remains in the table.

The tcp-halfclose-timer controls for how long, after a FIN packet, a session without FIN/ACK remains in the table.

The tcp-timewait-timer controls for how long, after a FIN/ACK packet, a session remains in the table. A closed session remains in the session table for a few seconds more to allow any out-of-sequence packet.

NEW QUESTION 26

Examine the IPsec configuration shown in the exhibit; then answer the question below.

| | |
|---------------------|--|
| Name | <input type="text" value="Remote"/> |
| Comments | <input type="text" value="Comments"/> |
| Network | |
| IP Version | <input checked="" type="radio"/> IPv4 <input type="radio"/> IPv6 |
| Remote Gateway | <input type="text" value="Static IP Address"/> <input checked="" type="checkbox"/> |
| IP Address | <input type="text" value="10.0.10.1"/> |
| Interface | <input type="text" value="port1"/> <input checked="" type="checkbox"/> |
| Mode Config | <input type="checkbox"/> |
| NAT Traversal | <input checked="" type="checkbox"/> |
| Keepalive Frequency | <input type="text" value="10"/> |
| Dead Peer Detection | <input checked="" type="checkbox"/> |

An administrator wants to monitor the VPN by enabling the IKE real time debug using these commands: diagnose vpn ike log-filter src-addr4 10.0.10.1
diagnose debug application ike -1 diagnose debug enable

The VPN is currently up, there is no traffic crossing the tunnel and DPD packets are being interchanged between both IPsec gateways. However, the IKE real time debug does NOT show any output. Why isn't there any output?

- A. The IKE real time shows the phases 1 and 2 negotiations onl
- B. It does not show any more output once the tunnel is up.
- C. The log-filter setting is set incorrectl
- D. The VPN's traffic does not match this filter.
- E. The IKE real time debug shows the phase 1 negotiation onl
- F. For information after that, the administrator must use the IPsec real time debug instead: diagnose debug application ipsec -1.
- G. The IKE real time debug shows error messages onl
- H. If it does not provide any output, it indicates that the tunnel is operating normally.

Answer: B

NEW QUESTION 31

Refer to exhibit, which contains the output of a BGP debug command.

```

FGT # get router info bgp summary
BGP router identifier 10.200.1.1, local AS number 655
BGP table version is 2
1 BGP AS-PATH entries
0 BGP community entries

Neighbor      V   AS      MsgRcvd  MsgSent   TblVer
10.200.3.1    4 65501    92       1756      0

Total number of neighbors 1
    
```

Which statement explains why the state of the 10.200.3.1 peer is Connect?

- A. The local router is receiving BGP keepalives from the remote peer, but the local peer has not received the OpenConfirm yet.
- B. The TCP session to 10.200.3.1 has not completed the three-way handshake.
- C. The local router is receiving the BGP keepalives from the peer, but it has not received a BGP prefix yet.
- D. The local router has received the BGP prefixes from the remote peer.

Answer: B

Explanation:

BGP neighbor states and how they change:

- Idle: Initial state
- Connect: Waiting for a successful three-way TCP connection
- Active: Unable to establish the TCP session
- OpenSent: Waiting for an OPEN message from the peer
- OpenConfirm: Waiting for the keepalive message from the peer
- Established: Peers have successfully exchanged OPEN and keepalive messages

NEW QUESTION 35

Examine the output from the BGP real time debug shown in the exhibit, then the answer the question below:

```

# diagnose ip router bgp all enable
# diagnose ip router bgp level info
# diagnose debug enable
"BGP: 10.200.3.1-Outgoing [DECODE] KAlive: Received!"
"BGP: 10.200.3.1-Outgoing [FSM] State: OpenConfirm Event: 26"
"BGP: 10.200.3.1-Outgoing [DECODE] Msg-Hdr: type 2, length 56"
"BGP: 10.200.3.1-Outgoing [DECODE] Update: Starting UPDATE decoding... Byt
(37), msg_size (37)"
"BGP: 10.200.3.1-Outgoing [DECODE] Update: NLRI Len(13)"
"BGP: 10.200.3.1-Outgoing [FSM] State: Established Event: 27"
"BGP: 10.200.3.1-Outgoing [RIB] Update: Received Prefix 0.0.0.0/0"
"BGP: 10.200.3.1-Outgoing [RIB] Update: Received Prefix 10.200.4.0/24"
"BGP: 10.200.3.1-Outgoing [RIB] Update: Received Prefix 10.200.3.0/24"
"BGP: 10.200.3.1-Outgoing [RIB] Update: Received Prefix 10.0.2.0/24"
"BGP: 10.200.3.1-Outgoing [FSM] State: Established Event: 34"
"BGP: 10.200.3.1-Outgoing [ENCODE] Msg-Hdr: Type 2"
"BGP: 10.200.3.1-Outgoing [ENCODE] Attr IP-Unicast: Tot-attr-len 20"
"BGP: 10.200.3.1-Outgoing [ENCODE] Update: Msg #5 Size 55"
"BGP: 10.200.3.1-Outgoing [FSM] State: Established Event: 34"
    
```

Which statements are true regarding the output in the exhibit? (Choose two.)

- A. BGP peers have successfully interchanged Open and Keepalive messages.
- B. Local BGP peer received a prefix for a default route.
- C. The state of the remote BGP peer is OpenConfirm.
- D. The state of the remote BGP peer will go to Connect after it confirms the received prefixes.

Answer: AB

NEW QUESTION 36

A FortiGate is rebooting unexpectedly without any apparent reason. What troubleshooting tools could an administrator use to get more information about the problem? (Choose two.)

- A. Firewall monitor.
- B. Policy monitor.

- C. Logs.
- D. Crashlogs.

Answer: CD

NEW QUESTION 39

Examine the following partial output from a sniffer command; then answer the question below.

```
# diagnose sniff packet any 'icmp' 4
interfaces= [any]
filters = [icmp]
2.101199 wan2 in 192.168.1.110-> 4.2.2.2: icmp: echo request
2.101400 wan1 out 172.17.87.16-> 4.2.2.2: icmp: echo request
.....
2.123500 wan2 out 4.2.2.2-> 192.168.1.110: icmp: echo reply
244 packets received by filter
5 packets dropped by kernel
```

What is the meaning of the packets dropped counter at the end of the sniffer?

- A. Number of packets that didn't match the sniffer filter.
- B. Number of total packets dropped by the FortiGate.
- C. Number of packets that matched the sniffer filter and were dropped by the FortiGate.
- D. Number of packets that matched the sniffer filter but could not be captured by the sniffer.

Answer: D

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=11655>

NEW QUESTION 41

View the exhibit, which contains the partial output of an IKE real-time debug, and then answer the question below.

```
ike 0:c49e59846861b0f6/0000000000000000:278: responder: main mode get 1st message..
ike 0:c49e59846861b0f6/0000000000000000:278: incoming proposal:
ike 0:c49e59846861b0f6/0000000000000000:278: proposal id = 0:
ike 0:c49e59846861b0f6/0000000000000000:278: protocol id = ISAKMP:
ike 0:c49e59846861b0f6/0000000000000000:278: trans_id = KEY_IKE.
ike 0:c49e59846861b0f6/0000000000000000:278: encapsulation = IKE/none
ike 0:c49e59846861b0f6/0000000000000000:278: type=OAKLEY_ENCRYPT_ALG, val=3DES_CBC.
ike 0:c49e59846861b0f6/0000000000000000:278: type=OAKLEY_HASH_ALG, val=SHA2_256.
ike 0:c49e59846861b0f6/0000000000000000:278: type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0:c49e59846861b0f6/0000000000000000:278: type=OAKLEY_GROUP, val=MODP2048.
ike 0:c49e59846861b0f6/0000000000000000:278: ISAKMP SA lifetime=86400
...
ike 0:c49e59846861b0f6/0000000000000000:278: my proposal, gw VPN:
ike 0:c49e59846861b0f6/0000000000000000:278: proposal id = 1:
ike 0:c49e59846861b0f6/0000000000000000:278: protocol id = ISAKMP:
ike 0:c49e59846861b0f6/0000000000000000:278: trans_id = KEY_IKE.
ike 0:c49e59846861b0f6/0000000000000000:278: encapsulation = IKE/none
ike 0:c49e59846861b0f6/0000000000000000:278: type=OAKLEY_ENCRYPT_ALG, val=AES_CBC,
key-len=256
ike 0:c49e59846861b0f6/0000000000000000:278: type=OAKLEY_HASH_ALG, val=SHA2_256.
ike 0:c49e59846861b0f6/0000000000000000:278: type=AUTH_METHOD, val=PRESHARED_KEY.
ike 0:c49e59846861b0f6/0000000000000000:278: type=OAKLEY_GROUP, val=MODP2048.
ike 0:c49e59846861b0f6/0000000000000000:278: ISAKMP SA lifetime=86400
...
ike 0:c49e59846861b0f6/0000000000000000:278: negotiation failure
ike Negotiate ISAKMP SA Error: ike 0:c49e59846861b0f6/0000000000000000:278:
proposal chosen
...
```

Why didn't the tunnel come up?

- A. The pre-shared keys do not match.
- B. The remote gateway's phase 2 configuration does not match the local gateway's phase 2 configuration.
- C. The remote gateway's phase 1 configuration does not match the local gateway's phase 1 configuration.
- D. The remote gateway is using aggressive mode and the local gateway is configured to use man mode.

Answer: C

NEW QUESTION 45

View the exhibit, which contains the output of a debug command, and then answer the question below.

```
# diagnose hardware sysinfo conserve
memory conserve mode: on
total RAM: 3040 MB
memory used: 2706 MB 89% of total RAM
Memory freeable: 334 MB 11% of total RAM
memory used + freeable threshold extreme: 2887 MB 95% of total RAM
memory used threshold red: 2675 MB 88% of total RAM
memory used threshold green: 2492 MB 82% of total RAM
```

Which one of the following statements about this FortiGate is correct?

- A. It is currently in system conserve mode because of high CPU usage.

- B. It is currently in extreme conserve mode because of high memory usage.
- C. It is currently in proxy conserve mode because of high memory usage.
- D. It is currently in memory conserve mode because of high memory usage.

Answer: D

NEW QUESTION 47

When using the SSL certificate inspection method for HTTPS traffic, how does FortiGate filter web requests when the browser client does not provide the server name indication (SNI) extension?

- A. FortiGate uses CN information from the Subject field in the server's certificate.
- B. FortiGate switches to the full SSL inspection method to decrypt the data.
- C. FortiGate blocks the request without any further inspection.
- D. FortiGate uses the requested URL from the user's web browser.

Answer: A

NEW QUESTION 49

A FortiGate's port1 is connected to a private network. Its port2 is connected to the Internet. Explicit web proxy is enabled in port1 and only explicit web proxy users can access the Internet. Web cache is NOT enabled. An internal web proxy user is downloading a file from the Internet via HTTP. Which statements are true regarding the two entries in the FortiGate session table related with this traffic? (Choose two.)

- A. Both session have the local flag on.
- B. The destination IP addresses of both sessions are IP addresses assigned to FortiGate's interfaces.
- C. One session has the proxy flag on, the other one does not.
- D. One of the sessions has the IP address of port2 as the source IP address.

Answer: AD

NEW QUESTION 52

A FortiGate device has the following LDAP configuration:

```
config user ldap
  edit "WindowsLDAP"
    set server "10.0.1.10"
    set cnid "cn"
    set dn "cn=Users, dc=trainingAD, dc=training, dc=lab"
    set type regular
    set username "dc=trainingAD, dc=training, dc=lab"
    set password xxxxxxxx
  next
end
```

The administrator executed the 'dsquery' command in the Windows LDAP server 10.0.1.10, and got the following output:

```
>dsquery user -samid administrator
```

"CN=Administrator, CN=Users, DC=trainingAD, DC=training, DC=lab" Based on the output, what FortiGate LDAP setting is configured incorrectly?

- A. cnid.
- B. username.
- C. password.
- D. dn.

Answer: B

Explanation:

<https://kb.fortinet.com/kb/viewContent.do?externalId=FD37516>

NEW QUESTION 53

View the exhibit, which contains a partial web filter profile configuration, and then answer the question below.

Which action will FortiGate take if a user attempts to access www.dropbox.com, which is categorized as File Sharing and Storage?

- A. FortiGate will exempt the connection based on the Web Content Filter configuration.
- B. FortiGate will block the connection based on the URL Filter configuration.
- C. FortiGate will allow the connection based on the FortiGuard category based filter configuration.
- D. FortiGate will block the connection as an invalid URL.

Answer: B

Explanation:

fortigate does it in order Static URL -> FortiGuard -> Content -> Advanced (java, cookie removal..)so block it in first step

NEW QUESTION 55

An administrator has configured a dial-up IPsec VPN with one phase 2, extended authentication (XAuth) and IKE mode configuration. The administrator has also enabled the IKE real time debug:

diagnose debug application ike-1 diagnose debug enable

In which order is each step and phase displayed in the debug output each time a new dial-up user is connecting to the VPN?

- A. Phase1; IKE mode configuration; XAuth; phase 2.
- B. Phase1; XAuth; IKE mode configuration; phase2.
- C. Phase1; XAuth; phase 2; IKE mode configuration.
- D. Phase1; IKE mode configuration; phase 2; XAuth.

Answer: B

Explanation:

https://help.fortinet.com/fos50hlp/54/Content/FortiOS/fortigate-ipsecvpn-54/IPsec_VPN_Concepts/IKE_Packet

NEW QUESTION 58

Refer to the exhibit, which contains a TCL script configuration on FortiManager.

An administrator has configured the TCL script on FortiManager, but failed to apply any changes to the managed device after being executed.

Why did the TCL script fail to make any changes to the managed device?

- A. Changes in an interface configuration can only be done by CLI script.

- B. The TCL script must start with #include <>.
- C. Incomplete commands are ignored in TCL scripts.
- D. The TCL command run_cmd has not been created.

Answer: D

NEW QUESTION 59

Examine the output of the 'diagnose debug rating' command shown in the exhibit; then answer the question below.

```
# diagnose debug rating
Locale      : english
License     : Contract
Expiration  : Wed Mar 27 17:00:00 20xx
-- Server List (Mon Apr 16 15:32:55 20xx) --
IP          Weight  RTT   Flags  TZ   Packets  Curr Lost  Total Lost
69.195.205.101  10    45    -5     -5   262432   0          846
69.195.205.102  10    46    -5     -5   329072   0          6806
209.222.147.43  10    75    -5     -5   71638    0          275
96.45.33.65     20    71    -8     -8   36875    0          92
208.91.112.196  20    103   DI     -8   34784    0          1070
208.91.112.198  20    107   D      -8   35170    0          1533
80.85.69.41     60    144   0      0    33728    0          120
62.209.40.73    71    226   1      1    33797    0          192
121.111.236.180 150   197   9      9    33754    0          145
69.195.205.103  45    44    F      -5   26410    26226     26227
```

Which statement are true regarding the output in the exhibit? (Choose two.)

- A. There are three FortiGuard servers that are not responding to the queries sent by the FortiGate.
- B. The TZ value represents the delta between each FortiGuard server's time zone and the FortiGate's time zone.
- C. FortiGate will send the FortiGuard queries to the server with highest weight.
- D. A server's round trip delay (RTT) is not used to calculate its weight.

Answer: BC

NEW QUESTION 64

Which of the following statements are correct regarding application layer test commands? (Choose two.)

- A. They are used to filter real-time debugs.
- B. They display real-time application debugs.
- C. Some of them display statistics and configuration information about a feature or process.
- D. Some of them can be used to restart an application.

Answer: CD

Explanation:

Application layer test commands don't display info in real time, but they do show statistics and configuration info about a feature or process. You can also use some of these commands to restart a process or execute a change in its operation.

NEW QUESTION 65

Examine the partial output from two web filter debug commands; then answer the question below:

```
# diagnose test application urlfilter 3
Domain | IP      DB Ver  T URL
34000000| 34000000  16.40224 P Bhttp://www.fgt99.com/
# get webfilter categories
g07 General Interest - Business:
 34 Finance and Banking
 37 Search Engines and Portals
 43 General Organizations
 49 Business
 50 Information and Computer Security
 51 Government and Legal Organizations
 52 Information Technology
```

Based on the above outputs, which is the FortiGuard web filter category for the web site www.fgt99.com?

- A. Finance and banking
- B. General organization.
- C. Business.
- D. Information technology.

Answer: C

NEW QUESTION 69

Examine the output from the 'diagnose debug authd fssolist' command; then answer the question below.

```
# diagnose debug authd fssolist —FSSO logons-IP: 192.168.3.1 User: STUDENT Groups: TRAININGAD/USERS Workstation: INTERNAL2. TRAINING. LAB The IP address 192.168.3.1 is NOT the one used by the workstation INTERNAL2. TRAINING. LAB. What should the administrator check?
```

- A. The IP address recorded in the logon event for the user STUDENT.
- B. The DNS name resolution for the workstation name INTERNAL2. TRAININ
- C. LAB.
- D. The source IP address of the traffic arriving to the FortiGate from the workstation INTERNAL2.TRAININ
- E. LAB.
- F. The reserve DNS lookup for the IP address 192.168.3.1.

Answer: C

NEW QUESTION 70

Examine the output of the 'diagnose ips anomaly list' command shown in the exhibit; then answer the question below.

```
# diagnose ips anomaly list
```

```
list nids meter:
id=ip_dst_session    ip=192.168.1.10    dos_id=2    exp=3646    pps=0    freq=0
id=udp_dst_session   ip=192.168.1.10    dos_id=2    exp=3646    pps=0    freq=0
id=udp_scan          ip=192.168.1.110   dos_id=1    exp=649     pps=0    freq=0
id=udp_flood         ip=192.168.1.110   dos_id=2    exp=653     pps=0    freq=0
id=tcp_src_session   ip=192.168.1.110   dos_id=1    exp=5175    pps=0    freq=8
id=tcp_port_scan     ip=192.168.1.110   dos_id=1    exp=175     pps=0    freq=0
id=ip_src_session    ip=192.168.1.110   dos_id=1    exp=5649    pps=0    freq=30
id=udp_src_session   ip=192.168.1.110   dos_id=1    exp=5649    pps=0    freq=22
```

Which IP addresses are included in the output of this command?

- A. Those whose traffic matches a DoS policy.
- B. Those whose traffic matches an IPS sensor.
- C. Those whose traffic exceeded a threshold of a matching DoS policy.
- D. Those whose traffic was detected as an anomaly by an IPS sensor.

Answer: A

NEW QUESTION 75

Refer to the exhibit, which shows a FortiGate configuration.

```
config system fortiguard
  set protocol udp
  set port 8888
  set load-balance-servers 1
  set auto-join-forticloud enable
  set update-server-location any
  set sandbox-region ""
  set fortiguard-anycast disable
  set antispam-force-off disable
  set antispam-cache enable
  set antispam-cache-ttl 1800
  set antispam-cache-mpercent 2
  set antispam-timeout 7
  set webfilter-force-off enable
  set webfilter-cache enable
  set webfilter-cache-ttl 3600
  set webfilter-timeout 15
  set sdns-server-ip "208.91.112.220"
  set sdns-server-port 53
  unset sdns-options
  set source-ip 0.0.0.0
  set source-ip6 ::
  set proxy-server-ip 0.0.0.0
  set proxy-server-port 0
  set proxy-username ""
  set ddns-server-ip 0.0.0.0
  set ddns-server-port 443
end
```

An administrator is troubleshooting a web filter issue on FortiGate. The administrator has configured a web filter profile and applied it to a policy; however, the web filter is not inspecting any traffic that is passing through the policy.

What must the administrator change to fix the issue?

- A. The administrator must increase webfilter-timeout.
- B. The administrator must disable webfilter-force-off.
- C. The administrator must change protocol to TCP.
- D. The administrator must enable fortiguard-anycast.

Answer: D

NEW QUESTION 78

An administrator has configured the following CLI script on FortiManager, which failed to apply any changes to the managed device after being executed.

```
# conf rout stat
#   edit 0
#     set gateway 10.20.121.2
#     set priority 20
#     set device "wan1"
#   next
# end
```

Why didn't the script make any changes to the managed device?

- A. Commands that start with the # sign are not executed.
- B. CLI scripts will add objects only if they are referenced by policies.
- C. Incomplete commands are ignored in CLI scripts.
- D. Static routes can only be added using TCL scripts.

Answer: A

Explanation:

https://help.fortinet.com/fmgr/50hlp/56/5-6-2/FortiManager_Admin_Guide/1000_Device%20Manager/2400_Sc

A sequence of FortiGate CLI commands, as you would type them at the command line. A comment line starts with the number sign (#). A comment line will not be executed.

NEW QUESTION 82

Refer to the exhibit, which contains partial output from an IKE real-time debug.

```
ike 0:H2S_0_1:1249: notify msg received: SHORTCUT-QUERY
ike 0:H2S_0_1:  rcv shortcut-query 12594932268010586978 4384dd592d62cd52/0000000000000000 100.64.3.1
10.1.1.254->10.1.2.254 psk 64 ppk 0 ttl 32 nat 0 ver 1 mode 0
ike 0:H2S_0: iif 13 10.1.1.254->10.1.2.254 route lookup oif 13
ike 0:H2S_0_0: forward shortcut-query 12594932268010586978 4384dd592d62cd52/0000000000000000
100.64.3.1 10.1.1.254->10.1.2.254 psk 64 ppk 0 ttl 31 ver 1 mode 0, ext-ma
ike 0:H2S_0_0:1248: sent IKE msg (SHORTCUT-QUERY): 100.64.1.1:500->100.64.5.1:500, len=236,
id=e2beec89f13c7074/06a73dfb3a5d3b54:340a645c
ike 0: comes 100.64.5.1:500->100.64.1.1:500, ifindex=3. . .
ike 0: IKEv1 exchange=Informational id=e2beec89f13c7074/06a73dfb3a5d3b5d:26254ae9 len=236
ike 0:H2S_0_0:1248: notify msg received: SHORTCUT-REPLY
ike 0:H2S_0_0:  rcv shortcut-reply 12594932268010586978 4384dd592d62cd52/89bf040f5f7408c0 100.64.5.1
to 10.1.1.254 psk 64 ppk 0 ver 1 mode 0 ext-mapping 100.64.3.1:500
ike 0:H2S_0: iif 13.10.1.2.254->10.1.1.254 route lookup oif 13
ike 0:H2S_0_1: forward shortcut-reply 12594932268010586978 4384dd592d62cd52/89bf040f5f7408c0
100.64.5.1 to 10.1.1.254 psk 64 ppk 0 ttl 31 ver 1 mode 0 ext-mapping 100.
```

Based on the debug output, which phase 1 setting is enabled in the configuration of this VPN?

- A. auto-discovery-shortcut
- B. auto-discovery-forwarder
- C. auto-discovery-sender
- D. auto-discovery-receiver

Answer: D

NEW QUESTION 87

Which statement about the designated router (DR) and backup designated router (BDR) in an OSPF multi-access network is true?

- A. FortiGate first checks the OSPF ID to elect a DR.
- B. Non-DR and non-BDR routers will form full adjacencies to DR and BDR only.
- C. BDR is responsible for forwarding link state information from one router to another.
- D. Only the DR receives link state information from non-DR routers.

Answer: B

NEW QUESTION 92

In which two states is a given session categorized as ephemeral? (Choose two.)

- A. A TCP session waiting to complete the three-way handshake.
- B. A TCP session waiting for FIN ACK.
- C. A UDP session with packets sent and received.
- D. A UDP session with only one packet received.

Answer: AD

NEW QUESTION 96

View the exhibit, which contains the output of a web diagnose command, and then answer the question below.

| # diagnose webfilter fortiguard statistics list | # diagnose webfilter fortiguard statistics list |
|---|---|
| Raring Statistics: | Cache Statistics: |
| ----- | ----- |
| DNS failures : 273 | Maximum memory : 0 |
| DNS lookups : 280 | Memory usage : 0 |
| Data send failures : 0 | Nodes : 0 |
| Data read failures : 0 | Leaves : 0 |
| Wrong package type : 0 | Prefix nodes : 0 |
| Hash table miss : 0 | Exact nodes : 0 |
| Unknown server : 0 | Requests : 0 |
| Incorrect CRC : 0 | Misses : 0 |
| Proxy requests failures : 0 | Hits : 0 |
| Request timeout : 1 | Prefix hits : 0 |
| Total requests : 2409 | Exact hits : 0 |
| Requests to FortiGuard servers : 1182 | No cache directives : 0 |
| Server errored responses : 0 | Add after prefix : 0 |
| Relayed rating : 0 | Invalid DB put : 0 |
| Invalid profile : 0 | DB updates : 0 |
| Allowed : 1021 | Percent full : 0% |
| Blocked : 3909 | Branches : 0% |
| Logged : 3927 | Leaves : 0% |
| Blocked Errors : 565 | Prefix nodes : 0% |
| Allowed Errors : 0 | Exact nodes : 0% |
| Monitors : 0 | Miss rate : 0% |
| Authenticates : 0 | Hit rate : 0% |
| Warnings : 18 | Prefix hits : 0% |
| Ovrd request timeout : 0 | Exact hits : 0% |
| Ovrd send failures : 0 | |
| Ovrd read failures : 0 | |
| Ovrd errored responses : 0 | |
| ... | |

Which one of the following statements explains why the cache statistics are all zeros?

- A. The administrator has reallocated the cache memory to a separate process.
- B. There are no users making web requests.
- C. The FortiGuard web filter cache is disabled in the FortiGate's configuration.
- D. FortiGate is using a flow-based web filter and the cache applies only to proxy-based inspection.

Answer: C

NEW QUESTION 98

View the exhibit, which contains a session entry, and then answer the question below.

```
session info: proto=1 proto_state=00 duration=1 expire=59 timeout=0 flags=00000000
sockflag=00000000 sockport=0 av_idx=0 use=3
origin-shaper=
reply-shaper=
per_ip_shaper=
ha_id=0 policy_dir=0 tunnel=/ vlan_cos=0/255
state=log may_dirty none
statistic(bytes/packets/allow_err): org=168/2/1 reply=168/2/1 tuples=2
tx speed(Bps/kbps): 97/0 rx speed(Bps/kbps): 97/0
origin->sink: org pre->post, reply pre->post dev=9->3/3->9 gw=10.200.1.254/10.1.0.1
hook=post dir=org act=snat 10.1.10.10:40602->10.200.5.1:8(10.200.1.254/10.1.0.1)
hook=pre dir=reply act=dnat 10.200.5.1:60430->10.200.1.1:0(10.1.10.10:40602)
misc=0 policy_id=1 auth_info=0 chk_client_info=0 vd=0
serial=0002a5c9 tos=ff/ff app_list=0 app=0 url_cat=0
dd_type=0 dd_mode=0
```

Which statement is correct regarding this session?

- A. It is an ICMP session from 10.1.10.10 to 10.200.1.1.
- B. It is an ICMP session from 10.1.10.10 to 10.200.5.1.
- C. It is a TCP session in ESTABLISHED state from 10.1.10.10 to 10.200.5.1.
- D. It is a TCP session in CLOSE_WAIT state from 10.1.10.10 to 10.200.1.1.

Answer: B

NEW QUESTION 101

Refer to the exhibit, which contains the partial output of the get vpn ipsec tunnel details command.

```

Hub # get vpn ipsec tunnel details
gateway
name: 'Hub2Spoke1'
type: route-based
local-gateway: 10.10.1.1:0 (static)
remote-gateway: 10.10.2.2:0 (static)
mode: ike-v1
interface: 'wan2' (6)
rx packets: 1025 bytes: 524402 errors: 0
tx packets: 641 bytes: 93 errors: 0
dpd: on-demand/negotiated idle: 20000ms retry: 3 count: 0
selectors
name: 'Hub2Spoke1'
auto-negotiate: disable
mode: tunnel
src: 0:192.168.1.0/0.0.0.0:0
dst: 0:10.10.20.0/0.0.0.0:0
SA
lifetime/rekey: 43200/32137
mtu: 1438
tx-esp-seq: 2ce
replay: enabled
inbound
spi: 01e54b14
enc: aes-cb 914dc5d092667ed436ea7f6efb867976
auth: sha1 a81b019d4cdfda32ce51e6b01d0b1ea42a74adce
outbound
spi: 3dd3545f
enc: aes-cb 017b8ff6c4ba21eac99b22380b7de74d
    
```

Based on the output, which two statements are correct? (Choose two.)

- A. Phase 2 authentication is set to sha1 on both sides.
- B. Anti-replay is disabled.
- C. Hub2Spoke1 is a policy-based VPN.
- D. Hub2Spoke1 is configured on interface wan2.

Answer: AD

NEW QUESTION 104

What configuration changes can reduce the memory utilization in a FortiGate? (Choose two.)

- A. Reduce the session time to live.
- B. Increase the TCP session timers.
- C. Increase the FortiGuard cache time to live.
- D. Reduce the maximum file size to inspect.

Answer: AD

NEW QUESTION 105

Refer to the exhibit, which shows a partial routing table.

```

FGT # get router info routing-table all
...
Routing table for VRF=7
C    10.73.9.0/24 is directly connected, port2

Routing table for VRF=12
C    10.1.0.0/24 is directly connected, port3
S    10.10.4.0/24 [10/0] via 10.1.0.100, port3
C    10.64.1.0/24 is directly connected, port1

Routing table for VRF=21
S    10.1.0.0/24 [10/0] via 10.72.3.254, port4
C    10.72.3.0/24 is directly connected, port4
    
```

Assuming all the appropriate firewall policies are configured, which two pings will FortiGate route? (Choose two.)

- A. Source IP address: 10.1.0.10. Destination IP address: 10.64.1.52
- B. Source IP address: 10.72.3.52. Destination IP address: 10.1.0.254
- C. Source IP address: 10.10.4.24, Destination IP address: 10.72.3.20
- D. Source IP address: 10.73.9.10, Destination IP address: 10.72.3.15

Answer: AB

NEW QUESTION 109

View the exhibit, which contains the output of a diagnose command, and then answer the question below.

```
diagnose sys session list expectation

session info: proto=6 proto_state=00 duration=3 expire=26 timeout=3600 flags=00000000
sockflag=00000000 sockport=0 av_idx=0 use=3
origin-shaper=
reply-shaper=
ha_id=0 policy_dir=1 tunnel=/
state=new complex
statistic(bytes/packets/allow_err): org=0/0/0 reply=0/0/0 tuples=2
origin->sink: org pre->post, reply pre->post dev=2->4/4->2 gwy=10.0.1.10/10.200.1.254
hook=pre dir-org act=dnat 10.171.121.38:0->10.200.1.1:60426(10.0.1.10:50365)
hook-pre dir-org act=noop 0.0.0.0:0->0.0.0.0:0(0.0.0.0:0)
pos/(before, after) 0/(0,0), 0/(0,0)
misc=0 policy_id=1 auth_info=0 chk_client_info=0 vd=0
serial=000000e9 tos=ff/ff ips_view=0 app_list=0 app=0
dd_type=0 dd_mode=0
```

What statements are correct regarding the output? (Choose two.)

- A. This is an expected session created by a session helper.
- B. Traffic in the original direction (coming from the IP address 10.171.122.38) will be routed to the next-hop IP address 10.0.1.10.
- C. Traffic in the original direction (coming from the IP address 10.171.122.38) will be routed to the next-hop IP address 10.200.1.1.
- D. This is an expected session created by an application control profile.

Answer: AC

NEW QUESTION 114

Which two statements about FortiManager is true when it is deployed as a local FDS? (Choose two.)

- A. It caches available firmware updates for unmanaged devices.
- B. It can be configured as an update server, or a rating server, but not both.
- C. It supports rating requests from both managed and unmanaged devices.
- D. It provides VM license validation services.

Answer: CD

NEW QUESTION 116

What is the diagnose test application ipsmonitor 99 command used for?

- A. To enable IPS bypass mode
- B. To provide information regarding IPS sessions
- C. To disable the IPS engine
- D. To restart all IPS engines and monitors

Answer: D

NEW QUESTION 120

Examine the output of the 'get router info bgp summary' command shown in the exhibit; then answer the question below.

```
# get router info bgp summary
BGP router identifier 0.0.0.117, local AS number 65117
BGP table version is 104
3 BGP AS-PATH entries
0 BGP community entries

Neighbor    V    AS  MsgRcvd  MsgSent  TblVer  InQ  OutQ  Up/Down  State/PfxRcd
10.125.0.60 4  65060  1698      1756    103    0    0 03:02:49      1
10.127.0.75 4  65075  2206      2250    102    0    0 02:45:55      1
10.200.3.1  4  65501   101        115     0     0    0 never         Active

Total number of neighbors 3
```

Which statements are true regarding the output in the exhibit? (Choose two.)

- A. BGP state of the peer 10.125.0.60 is Established.
- B. BGP peer 10.200.3.1 has never been down since the BGP counters were cleared.
- C. Local BGP peer has not received an OpenConfirm from 10.200.3.1.
- D. The local BGP peer has received a total of 3 BGP prefixes.

Answer: AC

NEW QUESTION 125

View the exhibit, which contains the output of a debug command, and then answer the question below.

```
#dia hardware sysinfo shm
SHM counter:          150
SHM allocated:        0
SHM total:            625057792
conserve mode: on - mem
system last entered: Mon Apr 24 16:36:37 2017
sys fd last entered: n/a
SHM FS total:        641236992
SHM FS free:         641208320
SHM FS avail:        641208320
SHM FS alloc:        28672
```

What statement is correct about this FortiGate?

- A. It is currently in system conserve mode because of high CPU usage.
- B. It is currently in FD conserve mode.
- C. It is currently in kernel conserve mode because of high memory usage.
- D. It is currently in system conserve mode because of high memory usage.

Answer: D

NEW QUESTION 129

Refer to the exhibit, which contains the output of a BGP debug command.

```
FGT # get router info bgp summary
BGP router identifier 0.0.0.117, local AS number 65117
BGP table version is 104
3 BGP AS-PATH entries
0 BGP community entries

Neighbor      V   AS  MsgRcvd  MsgSent  TblVer  InQ  OutQ  Up/Down  State/PfxRcd
10.125.0.60   4 65060   1698    1756    103   0    0   03:02:49      1
10.127.0.75   4 65075   2206    2250    102   0    0   02:45:55      1
100.64.3.1    4 65501    101     115     0    0    0   never      Active

Total number of neighbors 3
```

Which statement about the exhibit is true?

- A. The local router has received a total of three BGP prefixes from all peers.
- B. The local router has not established a TCP session with 100.64.3.1.
- C. Since the counters were last reset, the 10.200.3.1 peer has never been down.
- D. The local router BGP state is OpenConfirm with the 10.127.0.75 peer.

Answer: B

NEW QUESTION 133

Refer to the exhibit, which contains the partial output of a diagnose command.

```
Spoke-2 # dia vpn tunnel list
list all ipsec tunnel in vd 0

-----
name=VPN ver=1 serial=1 10.200.5.1:0 -> 10.200.4.1:0
bound_if=3 lgwy=statistic/1 tun=intf/0 mode=auto/1 encap=none/0
proxyid_num=1 child_num=0 refernt=15 ilast=10 olast=792 auto-discovery=0
stat: rxp=0 txp=0 rxb=0 txb=0
dpd: mode=on-demand on=1 idle=20000ms retry=3 count=0 seqno=0
natt: mode=none draft=0 interval=0 remote_port=0
proxyid=VPN proto=0 sa=1 ref=2 serial=1
  src: 0:10.1.2.0/255.255.255.0:0
  dat: 0:10.1.1.0/255.255.255.0:0
  SA: ref=3 options=2e type=00 soft=0 mtu=1438 expire=42403/OB replaywin=204B seqno=1
esn=replaywin_lastseq=00000000
life: type=01 bytes=0/0 timeout=43177/43200
dec: spi=ccclf66d esp=aes key=16 280e5cd6f9bacc65ac771556c464ffbd
  ah=shal key=20 c68091d68753578785de6a7a6b276b506e527
```

Based on the output, which two statements are correct? (Choose two.)

- A. Anti-replay is enabled.
- B. DPD is disabled.
- C. Remote gateway IP is 10.200.4.1.
- D. Quick mode selectors are disabled.

Answer: AC

NEW QUESTION 135

View the exhibit, which contains the output of a real-time debug. Which statement about this output is true?

```
FGT # diagnose debug application urlfilter -1
FGT # diagnose debug enable

msg="received a request /tmp/.wad512_0_0.url.socket, addr_len=30:
d=training.fortinet.com:443, id=687, cat=255, vfname='root', vfid=0,
profile='default', type=0, client=10.1.10.1, url_source=1, url="/"
action=9(ftgd-allow) wf-act=5(ALLOW) user="N/A" src=10.1.10.1 sport=58334
dst=13.226.142.41 dport=443 service="https" cat=52 url_cat=52 ip_cat=0
hostname="training.fortinet.com" url="/"
```

Which of the following statements is true regarding this output?

- A. The requested URL belongs to category ID 255.
- B. The server hostname is training.fortinet.com.
- C. FortiGate found the requested URL in its local cache.
- D. This web request was inspected using the ftgd-allow web filter profile.

Answer: C

NEW QUESTION 138

Which real time debug should an administrator enable to troubleshoot RADIUS authentication problems?

- A. Diagnose debug application radius -1.
- B. Diagnose debug application fnbamd -1.
- C. Diagnose authd console -log enable.
- D. Diagnose radius console -log enable.

Answer: B

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD32838>

NEW QUESTION 140

View the following FortiGate configuration.

```
config system global
    set snat-route-change disable
end
config router static
    edit 1
        set gateway 10.200.1.254
        set priority 5
        set device "port1"
    next
    edit 2
        set gateway 10.200.2.254
        set priority 10
        set device "port2"
    next
end
```

All traffic to the Internet currently egresses from port1. The exhibit shows partial session information for Internet traffic from a user on the internal network:

```
# diagnose sys session list
session info: proto=6 proto_state=01 duration=17 expire=7 timeout=3600
flags=00000000 sockflag=00000000 sockport=0 av_idx=0 use=3
ha_id=0 policy_dir=0 tunnel=/
state=may_dirty none app_ntf
statistic(bytes/packets/allow_err): org=57555/7/1 reply=23367/19/1 tuples=2
orgin->sink: org pre->post, reply pre->post dev=4->2/2->4
gwy=10.200.1.254/10.0.1.10
hook=post dir=org act=snat 10.0.1.10:64907-
>54.239.158.170:80(10.200.1.1:64907)
hook=pre dir=reply act=dnat 54.239.158.170:80-
>10.200.1.1:64907(10.0.1.10:64907)
pos/(before, after) 0/(0,0), 0/(0,0)
misc=0 policy_id=1 auth_info=0 chk_client_info=0 vd=0
serial=00000294 tos=ff/ff ips_view=0 app_list=0 app=0
dd_type=0 dd_mode=0
```

If the priority on route ID 1 were changed from 5 to 20, what would happen to traffic matching that user's session?

- A. The session would remain in the session table, and its traffic would still egress from port1.
- B. The session would remain in the session table, but its traffic would now egress from both port1 and port2.
- C. The session would remain in the session table, and its traffic would start to egress from port2.
- D. The session would be deleted, so the client would need to start a new session.

Answer: A

Explanation:

<http://kb.fortinet.com/kb/documentLink.do?externalID=FD40943>

NEW QUESTION 141

Refer to the exhibit, which contains the output of diagnose sys session list.

```

# diagnose sys session list
session info: proto=6 proto_state=01 duration=73 expire=3597 timeout=3600
flags=00000000 sockflag=00000000 sockport=0 av_idx=0 use=3
origin-shaper=
reply-shaper=
per_ip_shaper=
class_id=0 ha_id=0 policy_dir=0 tunnel=/ vlan_cos=0/255
state=may_dirty synced none app_ntf
statistic(bytes/packets/allow_err): org=822/11/1 reply=9037/15/1 tuples=2
origin->sink: org pre->post, reply pre->post dev=4->2/2->4
qwy=100.64.1.254/10.0.1.10
hook-post dir=org act=snat 10.0.1.10:65464->54.192.15.182:80 (100.64.1.1:65464)
hook-pre dir=reply act=dnat 54.192.15.182:80->100.64.1.1:65464 (10.0.1.10:65464)
pos/(before,after) 0/(0,0), 0/(0,0)
misc=0 policy_id=1 auth_info=0 chk_client_info=0 vd=0
serial=00000098 tos=ff/ff ips_view=0 app_list=0 app=0
dd_type=0 dd_mode=0
    
```

If the HA ID for the primary unit is zero (0), which statement about the output is true?

- A. This session cannot be synced with the slave unit.
- B. The inspection of this session has been offloaded to the slave unit.
- C. The master unit is processing this traffic.
- D. This session is for HA heartbeat traffic.

Answer: C

NEW QUESTION 142

Examine the output of the 'get router info bgp summary' command shown in the exhibit; then answer the question below.

```

Student# get router info bgp summary
BGP router identifier 10.200.1.1, local AS number 65500
BGP table version is 2
1 BGP AS-PATH entries
0 BGP community entries

Neighbor V AS MsgRcvd MsgSent TblVer InQ OutQ Up/Down State/PfxRcd
10.200.3.1 4 65501 92 112 0 0 0 never Connect

Total number of neighbors 1
    
```

Which statement can explain why the state of the remote BGP peer 10.200.3.1 is Connect?

- A. The local peer is receiving the BGP keepalives from the remote peer but it has not received any BGP prefix yet.
- B. The TCP session for the BGP connection to 10.200.3.1 is down.
- C. The local peer has received the BGP prefixed from the remote peer.
- D. The local peer is receiving the BGP keepalives from the remote peer but it has not received the OpenConfirm yet.

Answer: B

Explanation:

<http://www.ciscopress.com/articles/article.asp?p=2756480&seqNum=4>

NEW QUESTION 147

Which two statements about the Security Fabric are true? (Choose two.)

- A. Only the root FortiGate collects network information and forwards it to FortiAnalyzer.
- B. FortiGate uses FortiTelemetry protocol to communicate with FortiAnalyzer.
- C. All FortiGate devices in the Security Fabric must have bidirectional FortiTelemetry connectivity.
- D. Branch FortiGate devices must be configured first.

Answer: BC

NEW QUESTION 152

Which two configuration settings change the behavior for content-inspected traffic while FortiGate is in conserve mode? (Choose two.)

- A. IPS failopen
- B. mem failopen
- C. AV failopen
- D. UTM failopen

Answer: AC

NEW QUESTION 157

.....

Relate Links

100% Pass Your NSE7_EFW-7.0 Exam with ExamBible Prep Materials

https://www.exambible.com/NSE7_EFW-7.0-exam/

Contact us

We are proud of our high-quality customer service, which serves you around the clock 24/7.

Viste - <https://www.exambible.com/>