

IBM

Exam Questions 1Y0-204

Citrix Virtual Apps and Desktops 7 Administration



NEW QUESTION 1

Which Citrix ADC-owned IP address will send traffic from the Citrix ADC to NTP servers by default?

- A. CLIP
- B. VIP
- C. SNIP
- D. NSIP

Answer: D

NEW QUESTION 2

Scenario: A Citrix Administrator created an SSL virtual server using only the following commands:

```
add lb vserver sslvserver SSL 10.102.29.133.444
add service sslsvc1 192.168.0.14 SSL 443
add service sslsvc2 192.168.0.15 SSL 443
bind lb vserver sslvserver sslsvc1
bind lb vserver sslvserver sslsvc2
set ssl vserver sslvserver -ssl3 disabled
```

The SSL virtual server is currently in a DOWN state.

What could be the reason the SSL virtual server is in a down state?

- A. The SSL services are NOT on the 10.102.29.X network.
- B. SSLv3 is disabled.
- C. The virtual server SSL port is NOT set to port 443.
- D. The SSL Certificate is NOT bound to the virtual server.

Answer: D

NEW QUESTION 3

Scenario: Users report that they are receiving new sessions instead of reconnecting to their disconnected sessions. A Citrix Administrator investigates the issues and finds the sessions are in a disconnected state when the users leave work.

What should the administrator configure to allow the users to reconnect to their disconnected sessions while roaming?

- A. Session Pre-launch
- B. Workspace Control
- C. Session Linging
- D. Session Timeout

Answer: B

NEW QUESTION 4

Which tool should a Citrix Administrator use to monitor the overall daily performance of a Citrix Virtual Apps and Desktops Site?

- A. Citrix Studio
- B. HDX Monitor
- C. Citrix Director
- D. CDF Traces

Answer: C

NEW QUESTION 5

Scenario: A Citrix Administrator manages a Citrix Gateway with a Standard Platform License, with remote employees in the environment. The administrator wants to increase employee access by 300 users through the Citrix Gateway, using VPN access.

Which license should the administrator recommend purchasing for this environment?

- A. Citrix ADC Burst Packs License
- B. Citrix ADC Upgrade License
- C. Citrix Gateway Universal License
- D. Citrix Gateway Express License

Answer: C

NEW QUESTION 6

Which three statements are correct regarding Citrix printing? (Choose three.)

- A. Citrix printing does NOT assign each printer a unique namespace within a given session.
- B. The Citrix Print Manager Service monitors session events, such as logon and logoffs or session termination.
- C. Citrix printing sets the default security descriptor for auto-created printers to ensure client printer security.
- D. Citrix printing allows administrators, but NOT users, to print to any other users' active session client printers.
- E. The Citrix Print Manager Service handles requests by impersonating the actual session user.

Answer: BCE

NEW QUESTION 7

Which two options would provide an end-to-end encryption of data, while allowing the Citrix ADC to optimize the responses? (Choose two.)

- A. SSL Bridge protocol for the services
- B. SSL Bridge protocol for the virtual server
- C. HTTP protocol for the services
- D. HTTP protocol for the virtual server
- E. SSL protocol for the services
- F. SSL protocol for the virtual server

Answer: CF

NEW QUESTION 8

Scenario: A Citrix ADC appliance is having intermittent issues. A Citrix Administrator is unable to identify the root cause and fix them. The administrator opened a Support ticket and the Engineer assigned to the case requested all the logs and configuration information from the Citrix ADC.

Which technical support tool can the administrator use to gather all the information on the Citrix ADC to send to the Support Engineer?

- A. Start New Trace
- B. Get Back Trace
- C. Generate Support File
- D. Batch Configuration

Answer: C

NEW QUESTION 9

Scenario: A Citrix Administrator wants to add machines to a Delivery Group. The administrator has two machine catalogs containing unallocated machines. On the screen to choose machines from machine catalogs, the administrator can see that only one machine catalog is available.

A possible cause of this issue is that the machines in the unavailable machine catalog are . (Choose the correct option to complete the sentence.)

- A. different OS types
- B. provisioned with another provisioning method
- C. unregistered
- D. turned off

Answer: A

NEW QUESTION 10

Which account is used by FlexCast Management Architecture (FMA) services to access the Citrix Virtual Apps and Desktops SQL databases?

- A. Delivery Controller's machine account
- B. Local System account
- C. Network Service account
- D. Domain user account

Answer: A

NEW QUESTION 10

Scenario: A Citrix Administrator needs to reduce costs by limiting users' printing sources. The administrator needs to stop automatic creation of all client printers in a session and map printers based on the floor of the building from which the user's session connects.

Which two policies should the administrator configure to complete this task? (Choose two.)

- A. Printer properties retention
- B. Auto-create client printers
- C. Direct connections to print servers
- D. Session printers

Answer: CD

NEW QUESTION 11

A user complains to a Citrix Administrator that application load time is long when they log on at the beginning of the work day.

Which feature can the administrator enable to reduce the perceived start time of the user's application?

- A. Application Limits
- B. Application Keyword
- C. Application Lingering
- D. Application Prelaunch

Answer: D

NEW QUESTION 16

Scenario: A Citrix Administrator would like to grant access to a Junior Administrator on the Citrix ADC. The administrator would like to grant full access to everything except the following:

- Shell Access
- User Configuration access
- Partition Configuration access

Which pre-existing command policy would meet the needs of the scenario?

- A. Operator
- B. Sysadmin
- C. Network
- D. Superuser

Answer: A

NEW QUESTION 17

A Citrix Administrator is in the process of installing Citrix Cloud Connector, but the installation fails. What could be causing the Citrix Cloud Connector installation to fail on the machine?

- A. It is in sync with UTC time instead of local time.
- B. Enhanced Security Configuration (ESC) is set to 'off'.
- C. It cannot run on a machine template cloned across multiple machines.
- D. It is NOT joined to the domain.

Answer: D

NEW QUESTION 18

Scenario: A Citrix ADC MPX is using one of four 10G ports available in an environment. A Citrix Administrator found a traffic bottleneck at the Citrix ADC. What can the administrator do to increase bandwidth on the Citrix ADC?

- A. Add another 10G Citrix ADC port to the switch and configure Link Aggregation Control Protocol (LACP).
- B. Purchase another Citrix ADC MPX appliance.
- C. Add two more 10 Citrix ADC ports to the network and configure VLAN.
- D. Plug another 10G Citrix ADC port into the router.

Answer: A

NEW QUESTION 23

Scenario: A Citrix Administrator has deployed machines using Machine Creation Services (MCS). A user logs on to a desktop from a random/non-persistent pool of Windows 10 desktops. During the session, the user installs Microsoft Office 2016. To which disk is the Microsoft Office installation data written during the session?

- A. Differencing
- B. Identity
- C. Temporary
- D. Personal

Answer: A

NEW QUESTION 27

In a Global Server Load Balancing (GSLB) Active/Active environment, the connection proxy is used as the site persistence method. What is used to source the traffic when connection is proxied?

- A. Client source IP
- B. LDNS IP Address
- C. Virtual IP (VIP)
- D. Subnet IP (SNIP)

Answer: D

NEW QUESTION 28

Scenario: A Citrix Administrator maintains a Citrix Virtual Apps and Desktops Site with a large number of Windows users running various locally attached client printers. No network printers are being used. The administrator has enabled the HDX printer mapping policy to 'Auto-create all client printers', which has resulted in a large number of drivers being loaded onto the Virtual Delivery Agent (VDA) machines. New standards are requiring the administrator to limit these Windows drivers on the VDA machines.

Which printing feature can the administrator enable to meet the new standards?

- A. The Auto-create PDF universal printer policy
- B. The Auto-create local (non-network) client printers only policy
- C. The Citrix Universal Print Server
- D. The Citrix Universal Printer Driver

Answer: C

NEW QUESTION 33

Scenario: A Citrix Administrator configured Citrix ADC with multiple admin partitions, with different resources running one each. The administrator receives an SNMP alert stating 'a Load Balanced Virtual Server is down'. When the administrator checks the Citrix ADC, the resource on the partition that was usually managed is NOT there.

Now, the administrator has to check each partition to find the load balanced virtual server that is down.

What can the administrator do to add the partition information to the SNMP traps to avoid this from happening in the future?

- A. Configure additional SNMP trap listeners.
- B. Change SNMP trap options.

- C. Add the partition information to the SNMP traps.
- D. Configure the SNMP Manager to send the partition information.

Answer: C

NEW QUESTION 37

Which three options are allowed when using Classic policies? (Choose three.)

- A. HTTP
- B. CLIENT
- C. SERVER
- D. IP
- E. DNS
- F. TCP

Answer: ADF

NEW QUESTION 40

Which two options should a Citrix Administrator configure to stop the First-Time wizard from automatically popping up? (Choose two.)

- A. Host Name is NOT configured on the appliance.
- B. The Default Admin Password has NOT been changed.
- C. Licenses are NOT present on the appliance.
- D. The appliance is configured with the default IP address (192.168.100.1)

Answer: CD

NEW QUESTION 45

Which two statements are valid when using Citrix Profile Streaming? (Choose two.)

- A. Registry entries and files in the pending area are fetched when accessed.
- B. Profile Streaming is disabled by default.
- C. The files and folders are fetched on demand.
- D. Profile Streaming will delay the logon process.

Answer: AC

Explanation:

Citrix profile streaming enables and disables the Citrix streamed user profiles feature. When enabled, files and folders contained in a profile are fetched from the user store to the local computer only when they are accessed by users after they have logged on. Registry entries and files in the pending area are fetched immediately.

NEW QUESTION 49

Which Citrix ADC Access Control List (ACL) command can a Citrix Administrator use to bridge traffic originating from 192.168.10.200?

- A. add ns simpleacl6
- B. add ns acl6
- C. add ns acl
- D. add ns simpleacl

Answer: C

NEW QUESTION 51

Which utility can a Citrix Administrator use to resolve the Domain Name System (DNS) request being looked up frequently?

- A. nslookup
- B. dig +trace
- C. curl -K -d
- D. ping

Answer: B

Explanation:

<https://www.citrix.com/blogs/2019/05/31/dig-into-gslb-dns-problems-with-citrix-adc-no-shovel-required/>

NEW QUESTION 55

Scenario: A Citrix Administrator needs to configure persistence on a Global Server Load Balancing (GSLB) virtual server to which a service is bound, so that the service continues to serve requests from the client event after it is disabled manually, accepting new requests or connections only to honor persistence. After a configured period of time, no new requests or connections are directed to the service and all of the existing connections are closed.

Which parameter can the administrator configure while disabling the service to achieve this requirement?

- A. Request Threshold
- B. Persistence Time-Out
- C. Persistence Threshold
- D. Wait Time

Answer: B

NEW QUESTION 56

Which qualifier is used to configure the Content filter action to modify the HTTP header of an HTTP Request?

- A. Corrupt
- B. Forward
- C. Add
- D. Error Code

Answer: A

NEW QUESTION 58

Which mode on the Citrix ADC can a Citrix Administrator utilize to avoid asymmetrical packet flows and multiple route/ARP lookups?

- A. Use Subnet IP (USNIP)
- B. MAC-based forwarding (MBF)
- C. Layer 2
- D. Layer 3

Answer: B

NEW QUESTION 63

Which console can a Citrix Administrator use to provide customized permissions to a junior administrator for adding applications?

- A. Citrix Studio
- B. StoreFront
- C. Citrix Director
- D. Citrix Application Delivery Management

Answer: A

NEW QUESTION 65

A Citrix Administrator has executed the commands in the screenshot on the Citrix ADC using the command-line interface. Click on the 'Exhibit' button to view the screenshot of the command-line interface.

```
>
> add transform profile prof_url_change
Done
> add transform action "URL change" prof_url_change 10
Done
> set transform action "URL change" -priority 10 -reqUrlFrom "https://*" -reqUrlInto
"http://*" -resUrlFrom "http://*" -resUrlInto "https://*"
Done
> add transform policy pol_url_change true prof_url_change
Done
> bind lb vserver LB_vserver -policyName pol_url_change -priority 100 -
gotoPriorityExpression END -type REQUEST
```

Which two replacements will be the outcome of executing these commands? (Choose two.)

- A. https:// will be replaced by http:// in the HTTP REQUEST
- B. http:// will be replaced by https:// in the HTTP REQUEST
- C. http:// will be replaced by https:// in the HTTP RESPONSE
- D. https:// will be replaced by http:// in the HTTP RESPONSE

Answer: AD

NEW QUESTION 68

Scenario: A Citrix Administrator is in the process of migrating the existing 7.15 LTSR Virtual Delivery Agent (VDA) machines used on premises to Citrix Cloud. The administrator has created a new manual machine catalog and Delivery Group in Citrix Cloud and pointed to the existing Device Collection in Citrix Provisioning. The administrator also restarted the VDA machines.

What could prevent the VDA machines from registering in Citrix Cloud?

- A. The VDA master image was NOT updated to communicate with the Cloud Connectors.
- B. One of the two Cloud Connectors is down and unresponsive.
- C. The Citrix policies have NOT been migrated to Citrix Cloud.
- D. The VDA on the master image has NOT been updated to a later version.

Answer: A

NEW QUESTION 70

Scenario: A Citrix ADC receives packets that are destined for a MAC address owned by the Citrix ADC. The destination IP address of the packets does NOT belong to the Citrix ADC. Layer 3 Mode is enabled by default on the Citrix ADC.
What will the Citrix ADC do with the packets in this scenario?

- A. Drop the packets
- B. Bridge the packets.
- C. Route the packets.
- D. Process the packets.

Answer: C

NEW QUESTION 71

A Citrix Administrator needs to block access to multiple URLs for security reasons. Which configuration should the administrator use to accomplish this requirement?

A

```
add policy patset BAD_URL
bind policy patset BAD_URL badurl1.mylab.lab -index 11 -charset ASCII
bind policy patset BAD_URL badurl2.mylab.lab -index 10 -charset ASCII
add responder policy BAD_URL_DNS "DNS.REQ.QUESTION.DOMAIN.CONTAINS(\"BAD_URL\")" RESET
bind responder global BAD_URL_DNS 100 END -type DNS_REQ_OVERRIDE
```

B

```
add policy patset BAD_URL
bind policy patset BAD_URL badurl1.mylab.lab -index 11 -charset ASCII
bind policy patset BAD_URL badurl2.mylab.lab -index 10 -charset ASCII
add responder policy BAD_URL_DNS "DNS.REQ.QUESTION.DOMAIN.CONTAINS(\"BAD_URL\")" DROP
bind responder global BAD_URL_DNS 100 END -type DNS_REQ_OVERRIDE
```

C

```
bind policy patset BAD_URL badurl1.mylab.lab -index 11 -charset ASCII
bind policy patset BAD_URL badurl2.mylab.lab -index 10 -charset ASCII
add responder policy BAD_URL_DNS "DNS.REQ.QUESTION.DOMAIN.CONTAINS(\"BAD_URL\")" RESET
bind responder global BAD_URL_DNS 100 END -type DNS_REQ
```

D

```
add policy patset BAD_URL
bind policy patset BAD_URL badurl1.mylab.lab -index 11 -charset ASCII
bind policy patset BAD_URL badurl2.mylab.lab -index 10 -charset ASCII
add responder policy BAD_URL_DNS "DNS.REQ.QUESTION.DOMAIN.CONTAINS_ANY(\"BAD_URL\")" RESET
bind responder global BAD_URL_DNS 100 END -type DNS_REQ_OVERRIDE
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: B

NEW QUESTION 74

Scenario: A Citrix Administrator configures the 'Auto connect client drives' user settings to map client drives within the HDX session for all published desktops. The setting is configured in a Baseline Group Policy Object (GPO) and linked to an Organizational Unit (OU) that contains all of the published desktops.
When a user launches the desktop, client drives are NOT mapped. What is a possible reason?

- A. gpupdate /force needs to be executed on all of the machines.
- B. Loopback processing is NOT enabled.
- C. The GPO needs to be linked to the User OU.
- D. Desktops need to be restarted for the policy to be applied.

Answer: B

NEW QUESTION 77

Scenario: Client connections to certain virtual servers are abnormally high. A Citrix Administrator needs to be alerted whenever the connections pass a certain threshold.

How can the administrator use Citrix Application Delivery Management to accomplish this requirement?


- A. Configure TCP Insight on the Citrix Application Delivery Management.
- B. Configure specific alerts for virtual servers using Citrix Application Delivery Management.
- C. Configure SMTP Reporting on the Citrix Application Delivery Management by adding the threshold and email address.
- D. Configure Network Reporting on the Citrix Application Delivery Management by setting the threshold and email address.

Answer: D

NEW QUESTION 80

A Citrix Administrator configured the Responder policy to redirect the request for root page to the home page. However, after executing the command, the webpage access entered a loop, as shown in the second screenshot. Click on the 'Exhibit' buttons to view the screenshots.

```
>  
  
>  
  
> add responder action rs_redirect_home_act redirect "\ http://server1.training.lab/home.php  
\" -responseStatusCode 302  
  
Done  
  
> add responder policy rs_redirect_home_pol HTTP.REQ.IS_VALID res_redirect_home_act  
  
Done  
  
> bind lb vserver lb_vsrv_www -policyName rs_redirect_home_pol -priority 100 -  
gotoPriorityExpression END -type REQUEST  
  
Done  
  
>  
  
>
```

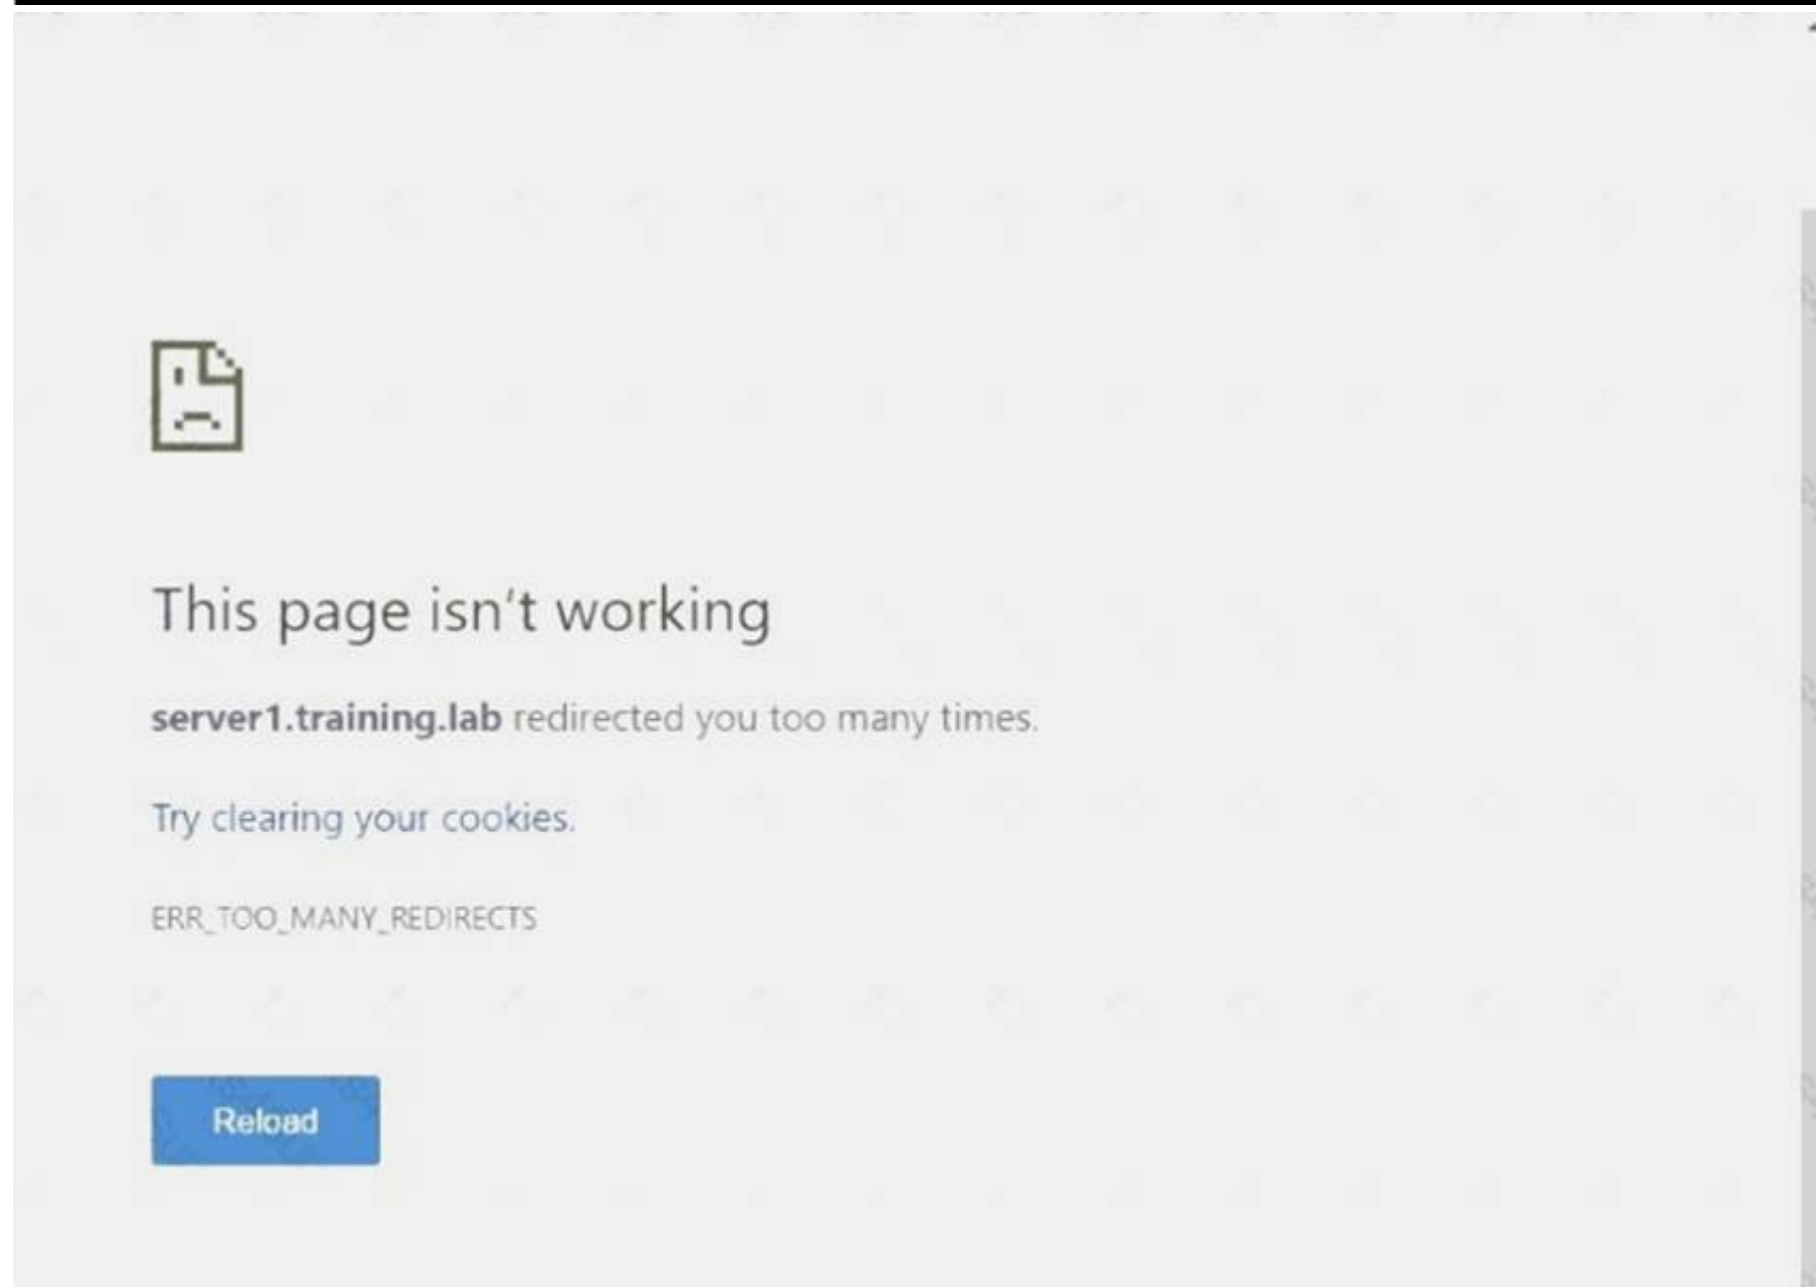

How will the administrator rectify this issue?

- A. Change Responder action expression to “/”
- B. Change Responder Policy expression to http.REQ.URL.Contains(“/”)
- C. Change Responder Action expression to http.REQ.URL
- D. Change Responder Policy expression to http.REQ.URL.EQ(“/”)

Answer: D

NEW QUESTION 81

What is the effect of the “set cs vserver vserver-CS-1 –redirectURL http://www.newdomain.com/mysite/” command?

- A. All the requests without url path /mysite/ will be redirected to http://www.newdomain.com/mysite/.
- B. All the requests to vserver-CS-1 will be redirected to http://www.newdomain.com/mysite/.
- C. If the vserver-CS-1 encounters high connection rate, then users will be redirected tohttp://www.newdomain.com/mysite/.
- D. If the status of vserver-CS-1 is DOWN, then users will be redirected to http://www.newdomain.com/mysite/.

Answer: D

NEW QUESTION 84

Scenario: A Citrix Administrator is configuring the Citrix Workspace app to allow users to access their applications and desktops. Users should NOT be able to migrate their application sessions between devices throughout the work day.

The administrator needs to modify the Citrix Workspace Control settings to prevent users from migrating their sessions between devices. (Choose the correct option to complete the sentence.)

- A. in the Site configuration within Citrix Studio
- B. in the StoreFront console
- C. through a Group Policy object
- D. in the Citrix Workspace app

Answer: B

NEW QUESTION 87

Scenario: A Citrix Administrator is in the process of migrating a Citrix Virtual Apps and Desktops on-premises deployment to Citrix Cloud with an on-premises resource location. StoreFront and Citrix ADC machines are located on premises. The administrator notices that application enumeration is working, but application launch is failing with an error for resources managed by the Citrix Cloud Site. What does the administrator need to change in order to get application launch working?

- A. Add the Citrix Cloud Connectors as Secure Ticket Authority (STA) servers on Citrix ADC and StoreFront.
- B. Remove the Citrix polices on the old Citrix Delivery Controllers.
- C. Add the Citrix Cloud Connectors as XML servers to the existing StoreFront servers.
- D. Decommission the old Citrix Delivery Controllers and Databases.

Answer: A

NEW QUESTION 92

Scenario: A Citrix Administrator received reports from users regarding published applications freezing and crashing randomly within their Virtual Delivery Agent (VDA) machine sessions. The administrator would like to review the history of applications that have crashed recently. Which step can the administrator take to gather the necessary information from within Citrix Director?

- A. Review Failed Server OS Machines under Dashboard.
- B. Configure Application Faults under Trends.
- C. Configure Application Errors under Trends.
- D. Review Citrix Alerts under Alerts.

Answer: B

NEW QUESTION 94


Which step does a Citrix Administrator need to take to enable Citrix XML Service trust for user access within a Citrix Virtual Apps and Desktops infrastructure?

- A. Enable XML Service trust using the StoreFront console.
- B. Run the Set-BrokerSite -TrustRequestsSentToTheXMLServicePort \$true PowerShell command from within a Virtual Delivery Agent (VDA) machine.
- C. Run the Set-BrokerSite -TrustRequestsSentToTheXMLServicePort \$true PowerShell command from within a Controller.
- D. Configure the appropriate XML Service trust settings using HDX policy within Citrix Studio.

Answer: C

NEW QUESTION 99

How can a Citrix Administrator configure a rewrite policy to change the version of HTTP from HTTP 1.1 to HTTP 1.0 in every request?

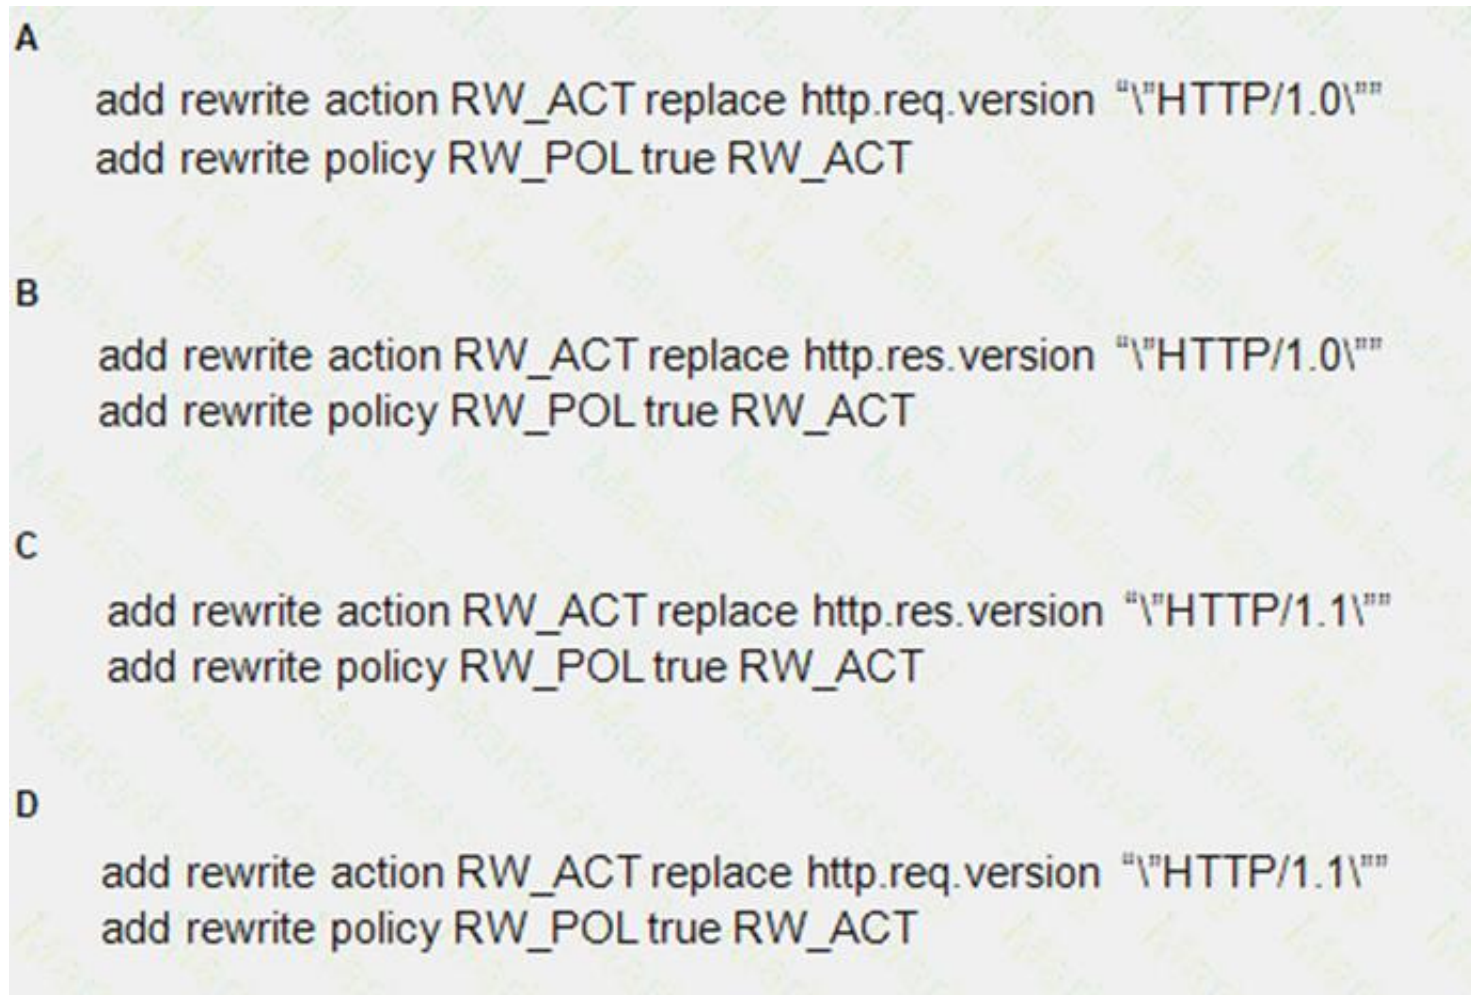

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 103

On which two components must the Secure Ticket Authority (STA) server locations be configured if a Citrix Administrator wants to configure secure external access to a Citrix Virtual Apps and Desktops Site? (Choose two.)

- A. Citrix Workspace app
- B. Citrix Gateway
- C. Delivery Controller
- D. StoreFront
- E. Virtual Delivery Agent (VDA)

Answer: BD

NEW QUESTION 108

Which three database high availability features are supported for on-premises deployments of Citrix Virtual Apps and Desktops? (Choose three.)

- A. Always On Availability Groups
- B. Automatic Storage Management
- C. Mirroring
- D. Clustered Instances
- E. Flashback

Answer: ACD

NEW QUESTION 113

Scenario: A Citrix Administrator is configuring a Citrix ADC high availability (HA) pair with an existing Primary Citrix ADC with all resources configured. The administrator added the Secondary Citrix ADC in high availability and found that the configuration on the existing primary was removed. It is now the Secondary Citrix ADC in the HA pair.

Which two configurations could the administrator have made to prevent this from happening? (Choose two.)

- A. Enable HA monitoring on all the interfaces of the SECONDARY device.
- B. Set the Secondary Citrix ADC to STAY SECONDARY in the Configure HA Node settings.
- C. Set the Primary Citrix ADC to STAY PRIMARY in the Configure HA Node settings.
- D. Enable HA monitoring on all the interfaces of the PRIMARY device.

Answer: CD

NEW QUESTION 116

Scenario: A Citrix Administrator configured the "-denySSLReneg" Parameter using the below command on Citrix ADC to enhance security.

set ssl parameter -denySSLReneg <option>

Which two options can the administrator use to complete the command? (Choose two.)

- A. NONSECURE
- B. HIGHSECURE
- C. FRONTEND_CLIENT
- D. NO
- E. ALL

Answer: AC

NEW QUESTION 119

Scenario: A Citrix Administrator needs to deploy 300 virtual Windows 10 desktops in an environment. The deployment should have a low impact on the existing network infrastructure. The environment also requires user-installed applications and persistency. Which Citrix technology can the administrator use to provision the desktops?

- A. Citrix Provisioning
- B. Existing Machines
- C. Machine Creation Services
- D. Manual Provisioning

Answer: C

NEW QUESTION 122

Which layer can optionally be managed by Citrix Cloud, when designing Citrix Cloud architecture?

- A. Access
- B. Hardware
- C. Resource
- D. Control

Answer: A

NEW QUESTION 126

Which three policy settings can a Citrix Administrator configure to improve HDX session performance for high-latency, low bandwidth user connections? (Choose three.)

- A. Maximum number of sessions
- B. View window contents while dragging
- C. CPU usage
- D. Target frame rate and color depth
- E. Limit video quality
- F. Application launch wait timeout

Answer: BDE

NEW QUESTION 128

Scenario: A Citrix Administrator configured the following policies in a Citrix Virtual Desktops Site environment, in descending priority order.

1. "Marketing Office A" has a filter on Marketing users. 'Client Network Drives' is disabled; 'Client Fixed Drives' is enabled.
2. "Marketing Office B" has a filter on Marketing users' internal IP. 'Client Network Drives' is disabled; 'Client Fixed Drives' is enabled.
3. "Accounting" has a filter on Accounting Users. 'Client Network Drives' is enabled; 'Client Fixed Drives' is NOT configured.
4. "Baseline" is configured without a filter. 'Client Network Drives' and 'Client Fixed Drives' are both disabled.

Based on these policies, what will Accounting users be able to access?

- A. Client network drives only
- B. Neither the client network drive nor the client fixed drive
- C. Client fixed drives only
- D. Client fixed and network drives

Answer: A

NEW QUESTION 129

Scenario: A Citrix Administrator has configured an Authentication, Authorization, and Auditing (AAA) action policy to allow users access through the Citrix ADC. The Administrator bound the policy to a specific vServer.

Which policy expression will allow all users access through the vServer?

- A. ns_disallow
- B. ns_false
- C. ns_true
- D. ns_allow

Answer: D

NEW QUESTION 131

Scenario: A Citrix Administrator is managing a Citrix ADC SDX running eight Citrix ADC instances. The administrator first needs to upgrade the firmware on the instances. However; the administrator is concerned that it needs to be done all at once.

What upgrading flexibility does SDX provide in this scenario?

- A. The Citrix ADC instances have to be upgraded at the same time.
- B. It is NOT possible to upgrade the Citrix ADC instances to different firmware versions.

- C. The Citrix ADC instance can be upgraded at the SDX management level, allowing all instances to be upgraded at once.
- D. The Citrix ADC instance can be upgraded on an individual basis, allowing all instances to run different firmware versions.

Answer: A

NEW QUESTION 135

Which three methods can a Citrix Administrator choose from when creating a Featured App Group for a set of applications? (Choose three.)

- A. Application names
- B. Installed locally
- C. Keyword
- D. Application category
- E. Delivery Group

Answer: ACD

Explanation:

You can create product featured app groups for your end users that are related to or fit in a specific category. For example, you can create a Sales Department featured app group containing applications that are used by that department. You can define featured apps in the StoreFront administration console by using application names or by using keywords or application categories that were defined in the Studio console.

NEW QUESTION 139

Scenario: A Citrix Administrator needs to add 10 new web servers to an existing server farm. The new servers are configured to serve the same applications and connections and are twice the capacity of the existing servers. The administrator wants to ensure that they are being fully utilized. Currently in the environment, the default load-balancing method is being used.

To ensure that only the 10 new servers are receiving twice the connections of the old servers without changing the load balancing to the rest of the environment, the administrator needs to add a weight of to the services attached to the servers. (Choose the correct option to complete the sentence.)

- A. 50; new
- B. 2; old
- C. 50; old
- D. 2; new

Answer: D

NEW QUESTION 143

Which tool can a Citrix Administrator use to collect information to investigate issues with session performance?

- A. CDF Control
- B. HDX Monitor
- C. Citrix Scout
- D. Citrix Health Assistant

Answer: A

NEW QUESTION 146

Scenario: A Citrix Administrator configured the rewrite policies below:

```
bind lb vserver VPN_http-policyName POL_1-priority 120 -gotoPriorityExpression END -type REQUEST
bind lb vserver VPN_http-policyName POL_2-priority 90 -gotoPriorityExpression NEXT -type REQUEST
bind lb vserver VPN_http-policyName POL_3-priority 100 -gotoPriorityExpression NEXT -type REQUEST
bind lb vserver VPN_http-policyName POL_4-priority 110 -gotoPriorityExpression END -type REQUEST
```

In which order will the policies be evaluated?

- A. POL_2, POL_3
- B. POL_2
- C. POL_2, POL_3, POL_4, POL_1
- D. POL_2, POL_3, POL_4

Answer: C

NEW QUESTION 148

For which three components can Citrix Director capture utilization statistics? (Choose three.)

- A. CPU
- B. IOPS
- C. Disk space
- D. Network
- E. Memory

Answer: ABE

NEW QUESTION 151

Scenario: A Citrix Administrator is concerned about the amount of health checks the Citrix ADC is sending to the backend resources. The administrator would like

to find a way to remove health checks from specific bound services.
How can the administrator accomplish this?

- A. Use reverse condition monitoring.
- B. Use the No-Monitor option.
- C. Unbind the current monitor.
- D. Use Service Groups to minimize health checks.

Answer: B

NEW QUESTION 152

A Citrix Administrator needs to confirm that all the client certificates presented to the authentication vServer are valid until year 2020.
Which expression can the administrator use to meet this requirement?

- A. CLIENT.SSL.CLIENT_CERT.VALID_NOT_AFTER.EQ(GMT2020)
- B. CLIENT.SSL.CLIENT_CERT.DAYS_TO_EXPIRE.EQ(2020)
- C. CLIENT.SSL.ORIGIN_SERVER_CERT.VALID_NOT_AFTER.EQ(GMT2020)
- D. CLIENT.SSL.CLIENT_CERT.VALID_NOT_BEFORE.EQ(GMT2020)

Answer: A

NEW QUESTION 156

How can a Citrix Administrator guarantee the availability of resource locations in a Citrix Cloud deployment?

- A. Deploy at least two Cloud Connectors for each resource location and load-balance them using Citrix ADC.
- B. Deploy at least two Cloud Connectors for each resource location.
- C. Convert one Cloud Connector to a template and deploy it when another Cloud Connector goes down.
- D. Deploy one Cloud Connector in each resource location.

Answer: B

NEW QUESTION 157

Scenario: A Citrix Administrator has a Citrix ADC SDX with four VPX instances configured. The SDX has a 10GB bandwidth license that has been configured with dedicated bandwidth of 2GB for each instance. However, the administrator found that three instances do NOT ever reach the bandwidth limit, while one instance reaches the limit and needs 1GB more bandwidth to accommodate increased traffic requests.

What can the administrator change on the instance that requires more bandwidth, to meet traffic requirements?

- A. Configure burst capacity on the instance adding 1 GB of bandwidth with burst priority 0.
- B. Purchase an SDX license to increase the bandwidth on the instances.
- C. Configure burst capacity of 1GB with priority 10.
- D. Configure LA channel to increase the bandwidth.

Answer: C

NEW QUESTION 162

Scenario: A Citrix Administrator needs to ensure that a user request is redirected to the next available data center in order to ensure the best user experience based upon location.

Below are the Global Server Load Balancing (GSLB) vserver settings:

```
sh gslb vserver gslb.outscale.cloud
gslb.outscale.cloud-SSL    State: UP
DNS Record Type: A
Last state changed was at Tue May 16 23:47:54 2017
Time since last state change: 16 days, 16:13:23.390
Configured Method: RTT
BackupMethod: LEASTCONNECTION
No. of Bound Services: 2(Total)    1(Active)
Persistence: NONE
Disable Primary Vserver on Down: DISABLED
Site Persistence: ConnectionProxy
```

To which setting should the administrator change the configured method?

- A. StaticProximity
- B. RoundRobin
- C. LeastConnection
- D. LeastBandwidth

Answer: C

NEW QUESTION 167

How can a Citrix Administrator enable the ability to monitor application failures for Desktop OS machines running the Virtual Delivery Agent (VDA)?

- A. By installing an Application Probe Agent on the Desktop OS VDA machines
- B. By entering a PowerShell command on a Delivery Controller
- C. By upgrading to premium licenses

D. By configuring a Citrix policy

Answer: B

NEW QUESTION 170

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

1Y0-204 Practice Exam Features:

- * 1Y0-204 Questions and Answers Updated Frequently
- * 1Y0-204 Practice Questions Verified by Expert Senior Certified Staff
- * 1Y0-204 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 1Y0-204 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 1Y0-204 Practice Test Here](#)